

Daily Quiz

Lecture 7: Minimization with Karnaugh Maps


CSE 370, Autumn 2007
Benjamin Ylvisaker

- Draw Boolean cubes for these two functions. I recommend putting the input vector $X=0, Y=0, Z=0$ in the lower left corner, making the X axis left-right, the Y axis up-down and the Z axis depth.

$$F(X, Y, Z) = \sum m(0, 1, 2, 5)$$

$$G(X, Y, Z) = \prod M(0, 4, 5, 7)$$

Daily Quiz Solution

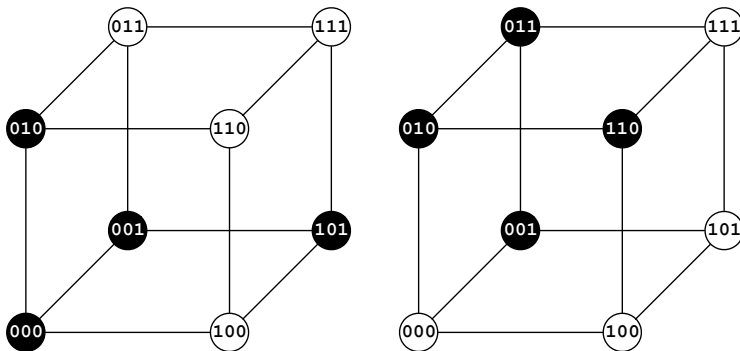

Last Lecture's Daily Quiz

- In product-of-sums form, an input 1 leads to inversion and an input 0 leads to no inversion
- Don't optimize when the exercise tells you not to optimize
- Some students drew circuits that were not sum-of-products or product-of-sums form
- It's a lot faster to draw 2-level circuits without the input inverters

Where We Are

- Last lecture: Boolean cubes and K-maps
- This lecture: Minimization with K-maps
- Next lecture: Combinational Verilog
- Homework 2 due today
- Lab 2 ongoing

Two-Level Simplification

- Key tool: The uniting theorem
 - $A(B + \neg B) = A$
 - $A + (B\neg B) = A$
- We will start with lots of “big” terms, then shrink and eliminate them with the uniting theorem

Implicants

- Any valid rectangle

		A B			
		00	01	11	10
C D	00	1	1	1	1
	01	1	1	0	1
	11	1	0	0	0
	10	1	1	0	1

Prime Implicants

- Implicants that are not “contained” within a larger implicant

		A B			
		00	01	11	10
C D	00	1	1	1	1
	01	1	1	0	1
	11	1	0	0	0
	10	1	1	0	1

Essential Prime Implicants

- Prime implicants that cover individual squares not covered by any other implicant

		A/B			
		00	01	11	10
C/D	00	0	1	0	0
	01	0	1	1	1
	11	1	1	1	0
	10	0	0	1	0

Not essential

Interesting Example

- No essential prime implicants

- You choose a “cover”

- Set of implicants
- Together include all 1's
- Usually prime
- Usually non-redundant

		A/B			
		00	01	11	10
C/D	00	0	0	1	1
	01	0	1	1	0
	11	1	1	0	0
	10	1	0	0	1

Translate Each Implicant

- A-C-D
- B-CD
- \neg ACD
- \neg BC-D

		A/B			
		00	01	11	10
C/D	00	0	0	1	1
	01	0	1	1	0
	11	1	1	0	0
	10	1	0	0	1

• $F(A,B,C,D) = A-C-D + B-CD + \neg ACD + \neg BC-D$

Example with Don't Cares

- BCD increment

- | A | B | C | D | E | F | G | H |
|---|---|---|---|---|---|---|---|
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 |
| 0 | 0 | 0 | 1 | 0 | 0 | 1 | 0 |
| 0 | 0 | 1 | 0 | 0 | 0 | 1 | 1 |
| 0 | 0 | 1 | 1 | 0 | 1 | 0 | 0 |
| 0 | 1 | 0 | 0 | 0 | 1 | 0 | 1 |
| 0 | 1 | 0 | 1 | 0 | 1 | 1 | 0 |
| 0 | 1 | 1 | 0 | 0 | 1 | 1 | 1 |
| 0 | 1 | 1 | 1 | 1 | 0 | 0 | 0 |
| 1 | 0 | 0 | 0 | 1 | 0 | 0 | 1 |
| 1 | 0 | 0 | 1 | 0 | 0 | 0 | 0 |
| 1 | 0 | 1 | X | X | X | X | X |
| 1 | 1 | X | X | X | X | X | X |

		A/B			
		00	01	11	10
C/D	00				
	01				
	11				
	10				

Top Bit

- BCD increment

A	B	C	D	E	F	G	H
0	0	0	0	0	0	0	1
0	0	0	1	0	0	1	0
0	0	1	0	0	0	1	1
0	0	1	1	0	1	0	0
0	1	0	0	0	1	0	1
0	1	0	1	0	1	1	0
0	1	1	0	0	1	1	1
0	1	1	1	1	0	0	0
1	0	0	0	1	0	0	1
1	0	0	1	0	0	0	0
1	0	1	X	X	X	X	X
1	1	X	X	X	X	X	X

C \ D \ A \ B	00	01	11	10
00	0	0	X	1
01	0	0	X	0
11	0	1	X	X
10	0	0	X	X

One Way to Cover the 0's

- BCD increment

A	B	C	D	E	F	G	H
0	0	0	0	0	0	0	1
0	0	0	1	0	0	1	0
0	0	1	0	0	0	1	1
0	0	1	1	0	1	0	0
0	1	0	0	0	1	0	1
0	1	0	1	0	1	1	0
0	1	1	0	0	1	1	1
0	1	1	1	1	0	0	0
1	0	0	0	1	0	0	1
1	0	0	1	0	0	0	0
1	0	1	X	X	X	X	X
1	1	X	X	X	X	X	X

C \ D \ A \ B	00	01	11	10
00	0	0	X	1
01	0	0	X	0
11	0	1	X	X
10	0	0	X	X

And the Resulting Expression

- BCD increment

A	B	C	D	E	F	G	H
0	0	0	0	0	0	0	1
0	0	0	1	0	0	1	0
0	0	1	0	0	0	1	1
0	0	1	1	0	1	0	0
0	1	0	0	0	1	0	1
0	1	0	1	0	1	1	0
0	1	1	0	0	1	1	1
0	1	1	1	1	0	0	0
1	0	0	0	1	0	0	1
1	0	0	1	0	0	0	0
1	0	1	X	X	X	X	X
1	1	X	X	X	X	X	X

C \ D \ A \ B	00	01	11	10
00	0	0	X	1
01	0	0	X	0
11	0	1	X	X
10	0	0	X	X

$$E = (A+C)(B+\neg D)(\neg C+D)$$

Now the Second Bit

- BCD increment

A	B	C	D	E	F	G	H
0	0	0	0	0	0	0	1
0	0	0	1	0	0	1	0
0	0	1	0	0	0	1	1
0	0	1	1	0	1	0	0
0	1	0	0	0	1	0	1
0	1	0	1	0	1	1	0
0	1	1	0	0	1	1	1
0	1	1	1	1	0	0	0
1	0	0	0	1	0	0	1
1	0	0	1	0	0	0	0
1	0	1	X	X	X	X	X
1	1	X	X	X	X	X	X

C \ D \ A \ B	00	01	11	10
00				
01				
11				
10				

Now the Second Bit

- BCD increment

A	B	C	D	E	F	G	H
0	0	0	0	0	0	0	1
0	0	0	1	0	0	1	0
0	0	1	0	0	0	1	1
0	0	1	1	0	1	0	0
0	1	0	0	0	1	0	1
0	1	0	1	0	1	1	0
0	1	1	0	0	1	1	1
0	1	1	1	1	0	0	0
1	0	0	0	1	0	0	1
1	0	0	1	0	0	0	0
1	0	1	X	X	X	X	X
1	1	X	X	X	X	X	X

A \ C	B	00	01	11	10
00	0	1	X	0	
01	0	1	X	0	
11	1	0	X	X	
10	0	1	X	X	

Now the Second Bit

- BCD increment

A	B	C	D	E	F	G	H
0	0	0	0	0	0	0	1
0	0	0	1	0	0	1	0
0	0	1	0	0	0	1	1
0	0	1	1	0	1	0	0
0	1	0	0	0	1	0	1
0	1	0	1	0	1	1	0
0	1	1	0	0	1	1	1
0	1	1	1	1	0	0	0
1	0	0	0	1	0	0	1
1	0	0	1	0	0	0	0
1	0	1	X	X	X	X	X
1	1	X	X	X	X	X	X

A \ C	B	00	01	11	10
00	0	1	X	0	
01	0	1	X	0	
11	1	0	X	X	
10	0	1	X	X	

And the Resulting Expression

- BCD increment

A	B	C	D	E	F	G	H
0	0	0	0	0	0	0	1
0	0	0	1	0	0	1	0
0	0	1	0	0	0	1	1
0	0	1	1	0	1	0	0
0	1	0	0	0	1	0	1
0	1	0	1	0	1	1	0
0	1	1	0	0	1	1	1
0	1	1	1	1	0	0	0
1	0	0	0	1	0	0	1
1	0	0	1	0	0	0	0
1	0	1	X	X	X	X	X
1	1	X	X	X	X	X	X

A \ C	B	00	01	11	10
00	0	1	X	0	
01	0	1	X	0	
11	1	0	X	X	
10	0	1	X	X	

$$F = (B+C)(B+D)(\neg B+\neg C+\neg D)$$

5 Variable K-maps

D \ E	B \ C			
	00	01	11	10
00	0	4	12	8
01	1	5	13	9
11	3	7	15	11
10	2	6	14	10

A=0

D \ E	B \ C			
	00	01	11	10
00	16	20	28	24
01	17	21	29	25
11	19	23	31	27
10	18	22	30	26

A=1

6 Variable K-maps

		C/D			
		00	01	11	10
AB=00	E	0	4	12	8
	F	1	5	13	9
		3	7	15	11
		2	6	14	10

		C/D			
		00	01	11	10
AB=01	E	16	20	28	24
	F	17	21	29	25
		19	23	31	27
		18	22	30	26

		C/D			
		00	01	11	10
AB=10	E	32	36	44	40
	F	33	37	45	41
		35	39	47	43
		34	38	46	42

		C/D			
		00	01	11	10
AB=11	E	48	52	60	56
	F	49	53	61	57
		51	55	63	59
		50	54	62	58

K-map Minimization Summary

- Fill out the table with 1's and 0's
- Find all the prime implicants
 - Try to "grow" non-prime implicants in each direction
- Select cover
 - All essential prime implicants
 - However many additional implicants are needed

Thank You for Your Attention

- Read lab 2
- Continue homework 2
- Continue reading the book