

MIPS Data Transfer Instructions

Opcode rt, immed (rs)

- rt: the loaded or stored value
- immed (rs): the memory address
 - rs: base address
 - immed: signed 16-bit offset value (displacement)
- full address = base + offset
 - allows a full 32 bit address
 - can address $\pm 32\text{KB}$ from the base address

MIPS Data Transfer Instructions


Some examples:

```
lw $t0, 46($t2)    # $t0 = memory[$t2+46]
sw $t0, 46($t2)    # memory[$t2+46] = $t0

lb $t1, -256($t2)  # $t1 =
                   # sign-extended (memory[$t2-256])
lbu $t1, -256($t2) # $t1 =
                   # zero-extended (memory[$t2-256])
sh $t1, -256($t2)  # memory[$t2-256] = the least
                   # significant halfword of $t1
```

I-type Format

I-type format used for data transfer instructions

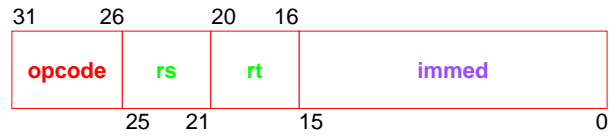

- **opcode** = data transfer instruction
- **rs** = base address
- **rt** = register value that is loaded from or stored to memory
- **immed** = address offset in bytes, $\pm 2^{15}$
 - sign-extended when used (replicate msb)

`lw $t6, 8($sp)`

