CSE/EE 461 – Lecture 5

From Aloha to Ethernet

David Wetherall
djw@cs.washington.edu

Last Time …

- Error detection and correction
- Redundant bits are added to messages to protect against transmission errors.
- Two recovery strategies are retransmissions (ARQ) and error correcting codes (FEC)
- The Hamming distance tells us how much error can safely be tolerated.



This Lecture

- Key Focus: How do multiple parties share a wire? We want the benefits of statistical multiplexing …
- This is the Medium Access Control (MAC) portion of the Link Layer
- Randomized access protocols:
  1. Aloha
  2. CSMA variants
  3. Classic Ethernet



1. ALOHA

- Wireless links between the Hawaiian islands in the 70s
- Want distributed allocation
  - no special channels, or single point of failure
- Aloha protocol:
  - Just send when you have data!
  - There will be some collisions of course …
  - Detect errored frames and retransmit a random time later
- Simple, decentralized and works well for low load
  - For many users, analytic traffic model, max efficiency is 18%

2. Carrier Sense Multiple Access

- We can do better by listening before we send (CSMA)
  - good defense against collisions only if "a" is small (LANs)



- "a" parameter: number of packets that fit on the wire
  - a = bandwidth * delay / packet size
  - Small (<<1) for LANs, large (>>1) for satellites

What if the Channel is Busy?

- 1-persistent CSMA
  - Wait until idle then go for it
  - Blocked senders can queue up and collide
- non-persistent CSMA
  - Wait a random time and try again
  - Less greedy when loaded, but larger delay
- p-persistent CSMA
  - If idle send with prob p until done; assumed slotted time
  - Choose p so p * # senders < 1; avoids collisions at cost of delay

CSMA with Collision Detection

- Even with CSMA there can still be collisions. Why?

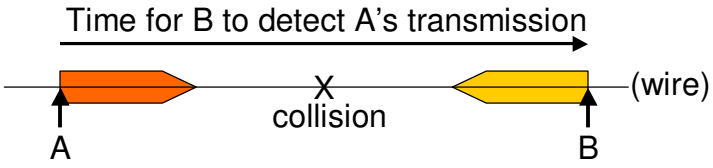

- For wired media we can detect all collisions and abort (CSMA/CD):
  - Requires a minimum frame size ("acquiring the medium")
  - B must continue sending ("jam") until A detects collision

3. Classic Ethernet

- IEEE 802.3 standard wired LAN (1-persistent CSMA/CD)
- Classic Ethernet: 10 Mbps over coaxial cable
  - baseband signals, Manchester encoding, preamble, 32 bit CRC



- Newer versions are much faster
  - Fast (100 Mbps), Gigabit (1 Gbps)
- Modern equipment isn't one long wire
  - hubs and switches



Ethernet Frames

- Min frame 64 bytes, max 1500 bytes
- Max length 2.5km, max between stations 500m (repeaters)
- Addresses unique per adaptor; globally assigned
- Broadcast media is readily tapped:
  - Promiscuous mode; multicast addresses

Binary Exponential Backoff

- Build on 1-persistent CSMA/CD
- On collision: jam and exponential backoff
  - Jamming: send 48 bit sequence to ensure collision detection
- Backoff:
  - First collision: wait 0 or 1 frame times at random and retry
  - Second time: wait 0, 1, 2, or 3 frame times
  - Nth time (N<=10): wait 0, 1, …, 2^N-1 times
  - Max wait 1023 frames, give up after 16 attempts
  - Scheme balances average wait with load

Ethernet Capture

- Randomized access scheme is not fair
- Stations A and B always have data to send
  - They will collide at some time
  - Suppose A wins and sends, while B backs off
  - Next time they collide and B's chances of winning are halved!

Ethernet Performance

- Much better than Aloha or CSMA!
  - Works very well in practice
- Source of protocol inefficiency: collisions
  - More efficient to send larger frames
    - Acquire the medium and send lots of data
  - Less efficient as the network grows in terms of frames
    - recall "a" = delay / (frame size * transmission rate)
    - "a" grows as the path gets longer (satellite)
    - "a" grows as the bit rates increase (Fast, Gigabit Ethernet)

Key Concepts

- Ethernet (CSMA/CD): randomness can lead to an effective distributed means of sharing a channel