



Image formation



Let's design a camera


- Idea 1: put a piece of film in front of an object
- Do we get a reasonable image?


Pinhole camera





Add a barrier to block off most of the rays


- This reduces blurring
- The opening known as the aperture
- How does this transform the image?




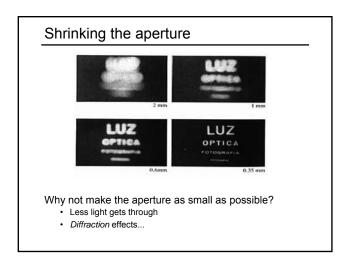


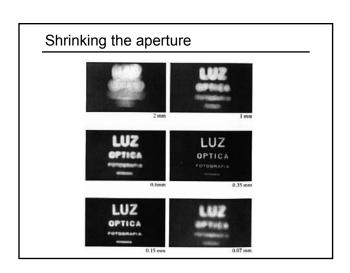










The eye



The human eye is a camera

- Iris colored annulus with radial muscles
- Pupil the hole (aperture) whose size is controlled by the iris
- What's the "film"?
 - photoreceptor cells (rods and cones) in the retina

Digital camera



A digital camera replaces film with a sensor array

- · Each cell in the array is a Charge Coupled Device
 - light-sensitive diode that converts photons to electrons
 - other variants exist: CMOS is becoming more popular
 - http://electronics.howstuffworks.com/digital-camera.htm

Issues with digital cameras

big difference between consumer vs. SLR-style cameras
 low light is where you most notice noise

Compression

creates <u>artifacts</u> except in uncompressed formats (tiff, raw)

Color

- color fringing artifacts from Bayer patterns

Blooming

charge overflowing into neighboring pixels

In-camera processing

oversharpening can produce <u>halos</u>

Interlaced vs. progressive scan video

- even/odd rows from different exposures

Are more megapixels better?


requires higher quality lens
 noise issues

Stabilization

- compensate for camera shake (mechanical vs. electronic)

- More info online, e.g.,
 http://electronics.howstuffworks.com/digital-camera.htm


Modeling projection



The coordinate system

- We will use the pin-hole model as an approximation
- Put the optical center (Center Of Projection) at the origin
- Put the image plane (Projection Plane) in front of the COP - Why?
- The camera looks down the negative z axis
 - we need this if we want right-handed-coordinates

Modeling projection



Projection equations

- Compute intersection with PP of ray from (x,y,z) to COP
- Derived using similar triangles (on board)

$$(x,y,z)\to (-d\frac{x}{z},\ -d\frac{y}{z},\ -d)$$

 • We get the projection by throwing out the last coordinate:

$$(x,y,z) \to (-d\frac{x}{z}, -d\frac{y}{z})$$

Homogeneous coordinates

Is this a linear transformation?

• no—division by z is nonlinear

Trick: add one more coordinate:

$$(x,y) \Rightarrow \begin{bmatrix} x \\ y \\ 1 \end{bmatrix}$$
 $(x,y,z) \Rightarrow \begin{bmatrix} x \\ y \\ z \\ 1 \end{bmatrix}$

homogeneous image

homogeneous scene coordinates

Converting from homogeneous coordinates

$$\begin{bmatrix} x \\ y \\ w \end{bmatrix} \Rightarrow (x/w, y/w) \qquad \begin{bmatrix} x \\ y \\ z \\ w \end{bmatrix} \Rightarrow (x/w, y/w, z/w)$$

Perspective Projection

Projection is a matrix multiply using homogeneous coordinates:

$$\begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & -1/d & 0 \end{bmatrix} \begin{bmatrix} x \\ y \\ z \\ 1 \end{bmatrix} = \begin{bmatrix} x \\ y \\ -z/d \end{bmatrix} \Rightarrow (-d\frac{x}{z}, -d\frac{y}{z})$$

divide by third coordinate

This is known as perspective projection

- The matrix is the projection matrix
- Can also formulate as a 4x4 (today's reading does this)

$$\begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & -1/d & 0 \end{bmatrix} \begin{bmatrix} x \\ y \\ z \\ 1 \end{bmatrix} = \begin{bmatrix} x \\ y \\ z \\ -z/d \end{bmatrix} \Rightarrow (-d\frac{x}{z}, -d\frac{y}{z})$$
 divide by fourth coordinate

Perspective Projection

How does scaling the projection matrix change the transformation?


$$\begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & -1/d & 0 \end{bmatrix} \begin{bmatrix} x \\ y \\ z \\ 1 \end{bmatrix} = \begin{bmatrix} x \\ y \\ -z/d \end{bmatrix} \Rightarrow (-d\frac{x}{z}, -d\frac{y}{z})$$

$$\begin{bmatrix} -d & 0 & 0 & 0 \\ 0 & -d & 0 & 0 \\ 0 & 0 & 1 & 0 \end{bmatrix} \begin{bmatrix} x \\ y \\ z \\ 1 \end{bmatrix} = \begin{bmatrix} -dx \\ -dy \\ z \end{bmatrix} \Rightarrow (-d\frac{x}{z}, -d\frac{y}{z})$$

Orthographic projection

Special case of perspective projection

· Distance from the COP to the PP is infinite



- · Good approximation for telephoto optics
- Also called "parallel projection": $(x, y, z) \rightarrow (x, y)$
- · What's the projection matrix?

$$\begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} x \\ y \\ z \\ 1 \end{bmatrix} = \begin{bmatrix} x \\ y \\ 1 \end{bmatrix} \Rightarrow (x, y)$$

Other types of projection

Scaled orthographic

· Also called "weak perspective"

$$\left[\begin{array}{ccc} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 1/d \end{array} \right] \left[\begin{array}{c} x \\ y \\ z \\ 1 \end{array} \right] \ = \left[\begin{array}{c} x \\ y \\ 1/d \end{array} \right] \Rightarrow (dx, dy)$$

Affine projection

· Also called "paraperspective"

$$\left[\begin{array}{cccc} a & b & c & d \\ e & f & g & h \\ 0 & 0 & 0 & 1 \end{array}\right] \left[\begin{array}{c} x \\ y \\ z \\ 1 \end{array}\right]$$

Camera parameters

A camera is described by several parameters

- Translation T of the optical center from the origin of world coords
- Rotation R of the image plane
- focal length f, principle point (x' $_{\rm c}$, y' $_{\rm c}$), pixel size (s $_{\rm x}$, s $_{\rm y}$)
- blue parameters are called "extrinsics," red are "intrinsics"

Projection equation




- The projection matrix models the cumulative effect of all parameters
- Useful to decompose into a series of operations

identity matrix

$$\boldsymbol{\Pi} = \begin{bmatrix} -fs_x & 0 & x'_x \\ 0 & -fs_y & y'_x \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 \end{bmatrix} \begin{bmatrix} \boldsymbol{R}_{3x3} & \boldsymbol{0}_{3x1} \\ \boldsymbol{0}_{1x3} & 1 \end{bmatrix} \begin{bmatrix} \boldsymbol{1}_{3x3} & \boldsymbol{T}_{3x1} \\ \boldsymbol{0}_{1x3} & 1 \end{bmatrix}$$


The definitions of these parameters are **not** completely standardized
 especially intrinsics—varies from one book to another


Distortion



Radial distortion of the image

- Caused by imperfect lenses
- Deviations are most noticeable for rays that pass through the edge of the lens

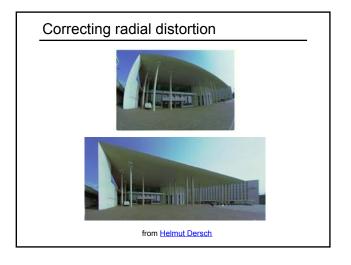



Modeling distortion

 $\begin{array}{rcl} x_n' & = & \hat{x}/\hat{z} \\ y_n' & = & \hat{y}/\hat{z} \end{array}$ $\begin{array}{c} \text{Project } (\hat{x},\hat{y},\hat{z}) \\ \text{to "normalized"} \\ \text{image coordinates} \end{array}$

 $r^{2} = x'_{n}^{2} + y'_{n}^{2}$ $x'_{d} = x'_{n}(1 + \kappa_{1}r^{2} + \kappa_{2}r^{4})$ $y'_{d} = y'_{n}(1 + \kappa_{1}r^{2} + \kappa_{2}r^{4})$ Apply radial distortion

 $x' = fx'_d + x_c$ $y' = fy'_d + y_c$ Apply focal length translate image center

To model lens distortion

Use above projection operation instead of standard projection matrix multiplication

Other types of lenses





Titlt-shift images from <u>Olivo Barbieri</u> and Photoshop <u>imitations</u>