

## CSE/EE 461 – Lecture 8

### IP/ICMP and the Network Layer

---

David Wetherall  
djw@cs.washington.edu

### Last Time

---

- Focus:
  - What to do when one shared LAN isn't big enough?
- Interconnecting LANs
  - Bridges and LAN switches
  - But there are limits ...

|              |
|--------------|
| Application  |
| Presentation |
| Session      |
| Transport    |
| Network      |
| Data Link    |
| Physical     |

## This Lecture

---

- Focus:
  - How do we build large networks?
- Introduction to the Network layer
  - Internetworks
  - Service models
  - IP, ICMP

|                |
|----------------|
| Application    |
| Presentation   |
| Session        |
| Transport      |
| <b>Network</b> |
| Data Link      |
| Physical       |


djw // CSE/EE 461, Autumn 2001

L8.3

## Internetworks

---

- Set of interconnected networks, e.g., the Internet
  - Scale and heterogeneity

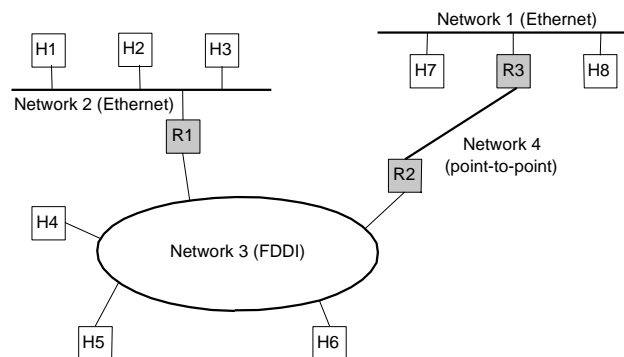

djw // CSE/EE 461, Autumn 2001

L8.4

## The Network Layer

---

- Job is to provide end-to-end data delivery between hosts on an internetwork
- Provides a higher layer of addressing

|                |
|----------------|
| Application    |
| Presentation   |
| Session        |
| Transport      |
| <b>Network</b> |
| Data Link      |
| Physical       |


djw // CSE/EE 461, Autumn 2001

L8.5

## In terms of protocol stacks

---

- IP is the network layer protocol used in the Internet
- Routers are network level gateways
- Packet is the term for network layer PDUs

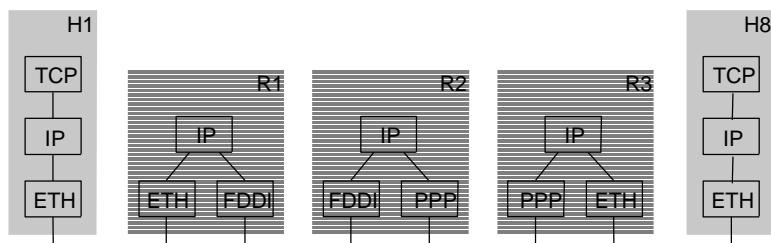

djw // CSE/EE 461, Autumn 2001

L8.6

## In terms of packet formats

---

- View of a packet on the wire on network 1 or 2
- Routers work with IP header, not higher
  - Higher would be a “layer violation”
- Routers strip and add link layer headers



Front of packet to left (and uppermost)

## Network Service Models

---

- Datagram delivery: postal service
  - Also connectionless, best-effort or unreliable service
  - Network can't guarantee delivery of the packet
  - Each packet from a host is routed independently
  - Example: IP
- Virtual circuit models: telephone
  - Also connection-oriented service
  - Signaling: connection establishment, data transfer, teardown
  - All packets from a host are routed the same way (router state)
  - Example: ATM, Frame Relay, X.25

## Datagrams or Virtual Circuits?

---

- Pros and Cons?
  - Simplicity/robustness versus stronger resource allocation
- We return to these tradeoffs later
  - Quality of Service (QOS)
  - These issues at the heart of current Internet evolution
  - Intserv (connection oriented) vs Diffserv (“connectionless”)


## Internet Protocol (IP)

---

- IP (RFC791) defines a “best effort” service
  - May be loss, reordering, duplication, and errors!
  - Currently IPv4 (IP version 4), IPv6 on the way
- Routers forward packets using predetermined routes
  - Routing protocols (RIP, OSPF, BGP) run between routers to maintain routes (routing table, forwarding information base)
- Global, hierarchical addresses, not flat addresses
  - 32 bits in IPv4 address; 128 bits in IPv6 address
  - ARP (Address Resolution Protocol) maps IP to MAC addresses

## IPv4 Packet Format

- Version is 4
- Header length is number of 32 bit words
- Limits size of options

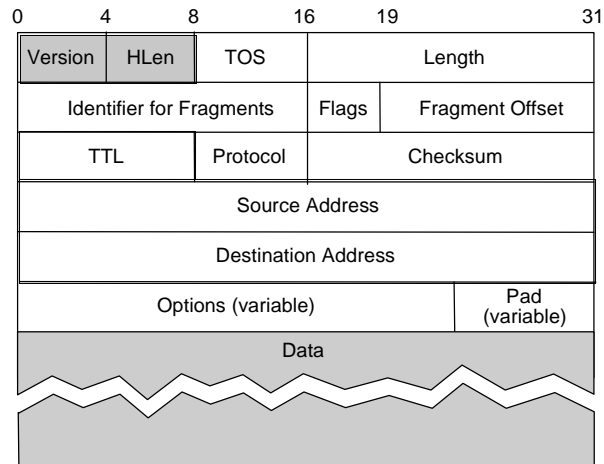


djw // CSE/EE 461, Autumn 2001

L8.11

## IPv4 Header Fields ...

- Type of Service
- Abstract notion, never really worked out
  - Routers ignored
- But now being redefined for Diffserv

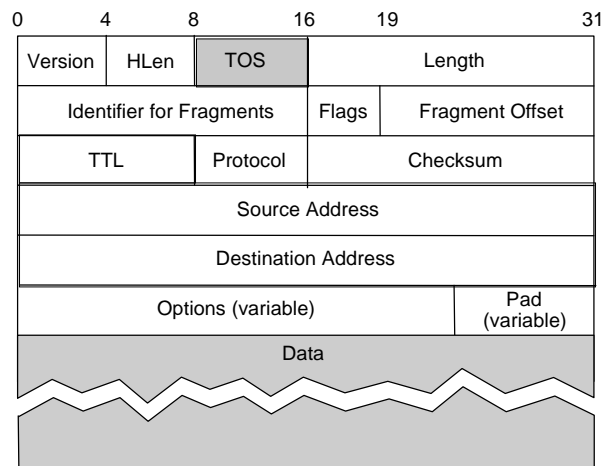


djw // CSE/EE 461, Autumn 2001

L8.12

## IPv4 Header Fields ...

- Length of packet
- Min 20 bytes, max 65K bytes (limit to packet size)

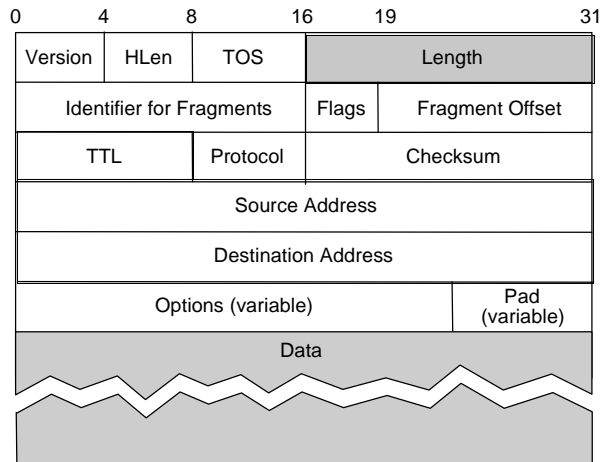


djw // CSE/EE 461, Autumn 2001

L8.13

## IPv4 Header Fields ...

- Fragment fields
- Different LANs have different frame size limits
- May need to break large packet into smaller fragments

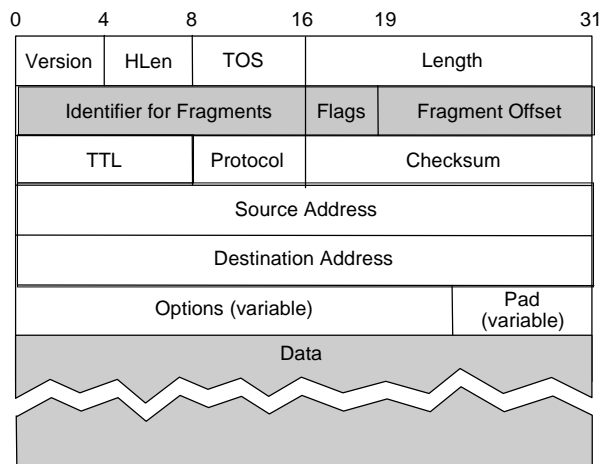


djw // CSE/EE 461, Autumn 2001

L8.14

## IPv4 Header Fields ...

- Time To Live
- Decremented by router and packet discarded if = 0
- Prevents immortal packets

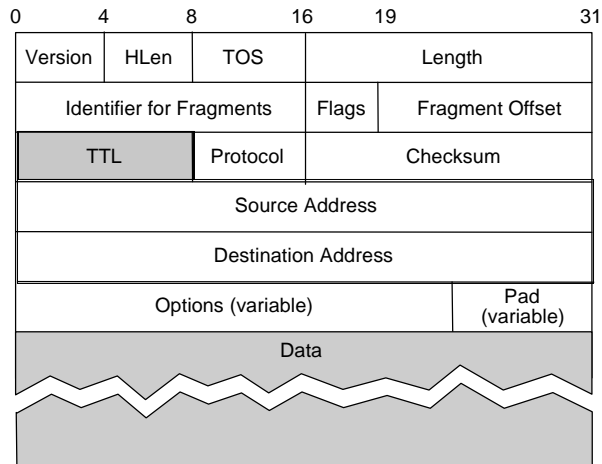


djw // CSE/EE 461, Autumn 2001

L8.15

## IPv4 Header Fields ...

- Identifies higher layer protocol
  - E.g., TCP, UDP

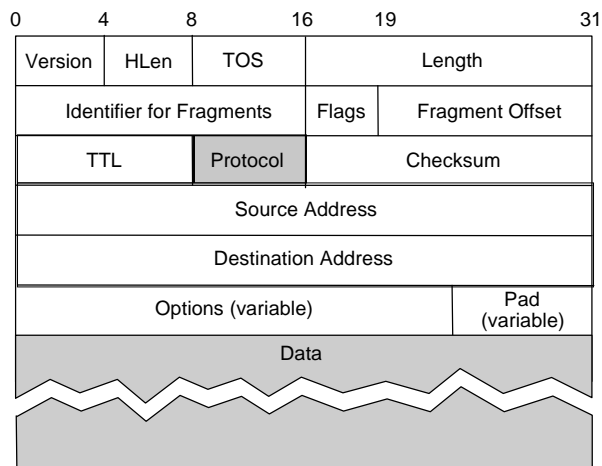


djw // CSE/EE 461, Autumn 2001

L8.16



## IPv4 Header Fields ...

- Header checksum
- Recalculated by routers (TTL drops)
- Doesn't cover data
- Disappears for IPv6

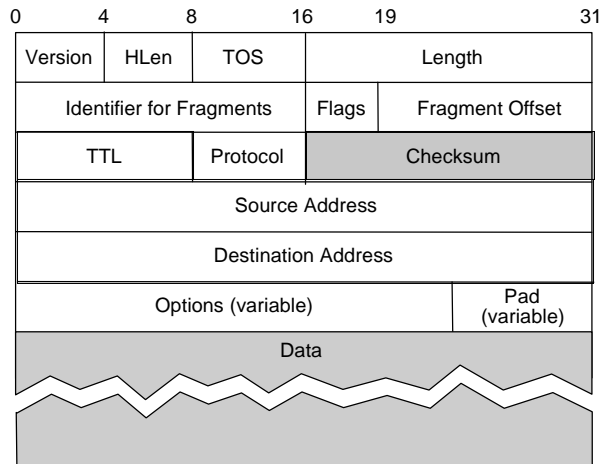


djw // CSE/EE 461, Autumn 2001

L8.17

## IPv4 Header Fields ...

- Source/destination addresses
  - Not Ethernet
- Unchanged by routers
- Not authenticated by default

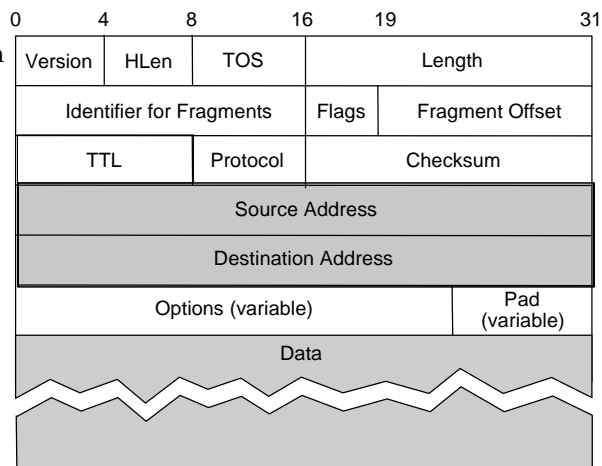


djw // CSE/EE 461, Autumn 2001

L8.18

## IPv4 Header Fields ...

- IP options indicate special handling
  - Timestamps
  - "Source" routes
- Rarely used ...

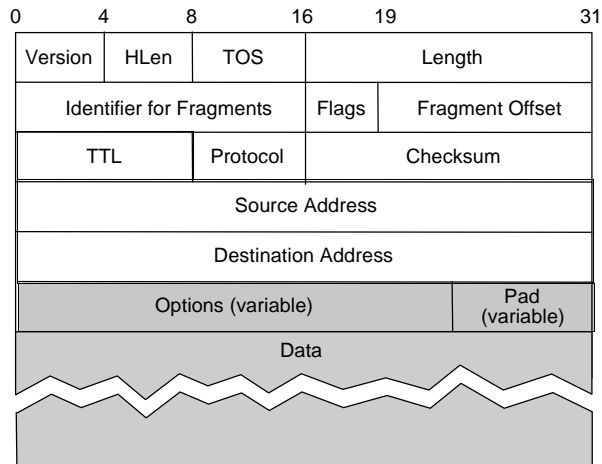


djw // CSE/EE 461, Autumn 2001

L8.19

## Fragmentation Issue

- Different networks may have different frame limits (MTUs)
  - Ethernet 1.5K, FDDI 4.5K
- Don't know if packet will be too big for path beforehand
  - IPv4: fragment on demand and reassemble at destination
  - IPv6: network returns error message so host can learn limit

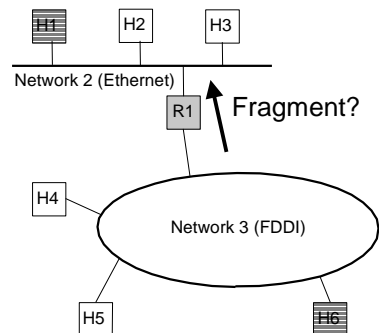


djw // CSE/EE 461, Autumn 2001

L8.20

## Fragment Fields

- Fragments of one packet identified by (source, dest, frag id) triple
  - Make unique
- Offset gives start, length changed
- Flags are More Fragments (MF) Don't Fragment (DF)

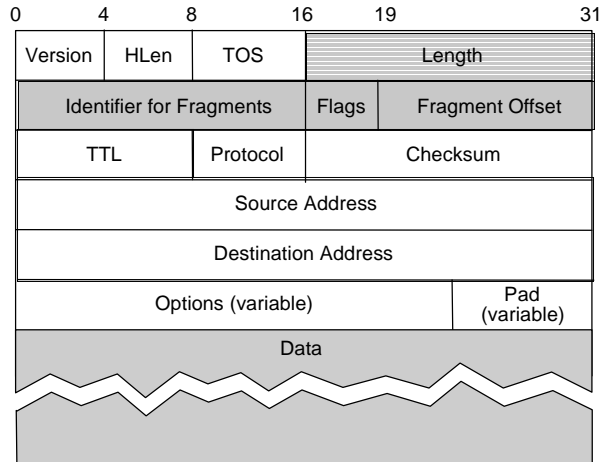

djw // CSE/EE 461, Autumn 2001

L8.21

## Fragment Considerations

- Relating fragments to original datagram provides:
  - Tolerance of loss, reordering and duplication
  - Ability to fragment fragments
- Consequences of fragmentation:
  - Loss of any fragments causes loss of entire packet
  - Need to time-out reassembly when any fragments lost

djw // CSE/EE 461, Autumn 2001

L8.22

## Path MTU Discovery

---

- Path MTU is the smallest MTU along path
  - Packets less than this size don't get fragmented
- Fragmentation is a burden for routers
  - We already avoid reassembling at routers
  - Avoid fragmentation too by having hosts learn path MTUs
- Hosts send packets, routers return error if too large
  - Hosts discover limits, can fragment at source
  - Reassembly at destination as before
  
- Learned lesson from IPv4, streamlined in IPv6

djw // CSE/EE 461, Autumn 2001

L8.23

## ICMP

---


- What happens when things go wrong?
  - Need a way to test/debug a large, widely distributed system
- ICMP = Internet Control Message Protocol (RFC792)
  - Companion to IP – required functionality
- Used for error and information reporting:
  - Errors that occur during IP forwarding
  - Queries about the status of the network

djw // CSE/EE 461, Autumn 2001

L8.24

## ICMP Generation

---

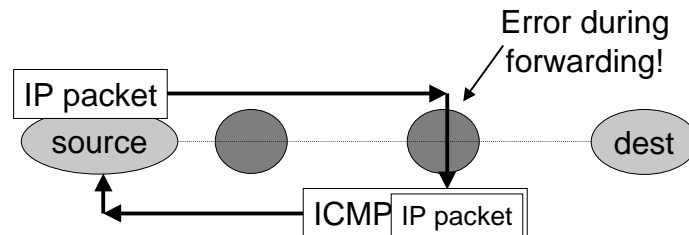

djw // CSE/EE 461, Autumn 2001

L8.25

## Common ICMP Messages

---

- Destination unreachable
  - “Destination” can be host, network, port or protocol
- Redirect
  - To shortcut circuitous routing
- TTL Expired
  - Used by the “traceroute” program
- Echo request/reply
  - Used by the “ping” program
- ICMP messages include portion of IP packet that triggered the error (if applicable) in their payload

djw // CSE/EE 461, Autumn 2001

L8.26

## ICMP Restrictions

---

- The generation of error messages is limited to avoid cascades ... error causes error that causes error!
- Don't generate ICMP error in response to:
  - An ICMP error
  - Broadcast/multicast messages (link or IP level)
  - IP header that is corrupt or has bogus source address
  - Fragments, except the first
- ICMP messages are often rate-limited too.

## Key Concepts

---

- Network layer provides end-to-end data delivery across an internetwork, not just a LAN
  - Issues of scale and heterogeneity
  - Datagram and virtual circuit service models
  - IP/ICMP is the network layer protocol of the Internet
- Up next: More detailed look at routing and addressing