


## Motivation for Multithreaded Architectures

Processors not executing code at their hardware potential

- late 70's: performance lost to memory latency
- 90's: performance not in line with the increasingly complex parallel hardware as well
  - increase in instruction issue bandwidth
  - increase in number of functional units
  - out-of-order execution
  - techniques for decreasing/hiding branch & memory latencies
- Still, processor utilization was **decreasing** & instruction throughput not increasing in proportion to the issue width

## Motivation for Multithreaded Architectures

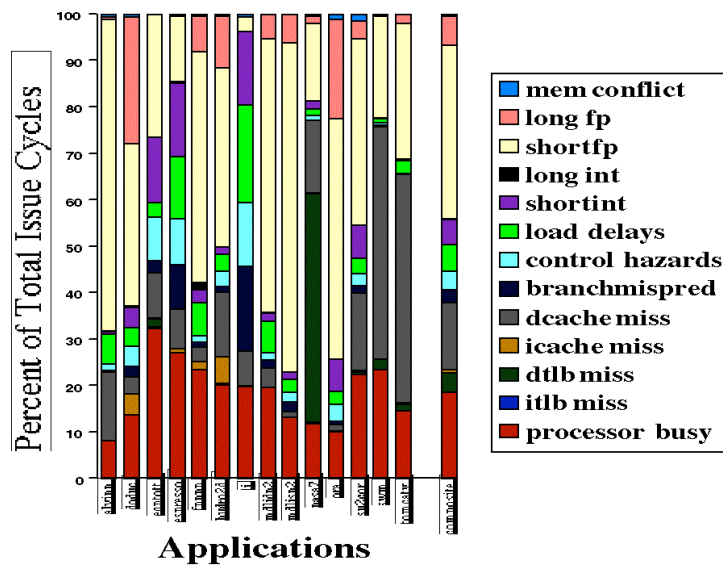

## Motivation for Multithreaded Architectures

Major cause is the lack of instruction-level parallelism in a single executing thread

Therefore the solution has to be more general than building a smarter cache or a more accurate branch predictor

## Multithreaded Processors

**Multithreaded processors** can increase the pool of independent instructions & consequently address multiple causes of processor stalling

- holds processor state for more than one thread of execution
  - registers
  - PC
  - each thread's state is a **hardware context**
- execute the instruction stream from multiple threads without *software* context switching
- utilize thread-level parallelism (TLP) to compensate for a lack in ILP

## Multithreading

Traditional multithreaded processors *hardware* switch to a different context to avoid processor stalls

Two styles of traditional multithreading

1. **coarse-grain** multithreading

- switch on a long-latency operation (e.g., L2 cache miss)
- another thread executes while the miss is handled
- modest increase in instruction throughput
  - doesn't hide latency of short-latency operations
  - no switch if no long-latency operations
  - need to fill the pipeline on a switch
- potentially no slowdown to the thread with the miss
  - if stall is long & switch back fairly promptly
- HEP, IBM RS64 III


## Traditional Multithreading

Two styles of traditional multithreading

2. **fine-grain** multithreading

- can switch to a different thread each cycle (usually round robin)
- hides latencies of all kinds
- larger increase in instruction throughput but slows down the execution of each thread
- Cray (Tera) MTA

## Comparison of Issue Capabilities

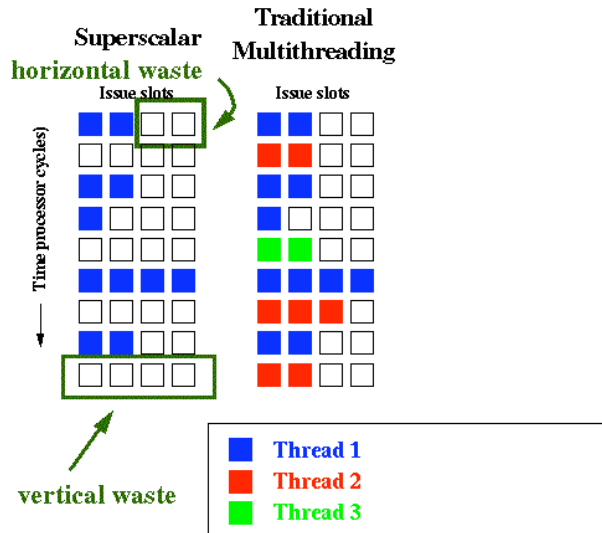

Spring 2007

CSE 471 - Multithreading

7

## Simultaneous Multithreading (SMT)

Third style of multithreading, different concept

### 3. simultaneous multithreading (SMT)


- issues multiple instructions from multiple threads each cycle
- no hardware context switching
- same-cycle multithreading
- huge boost in instruction throughput with less degradation to individual threads

Spring 2007

CSE 471 - Multithreading

8

## Comparison of Issue Capabilities

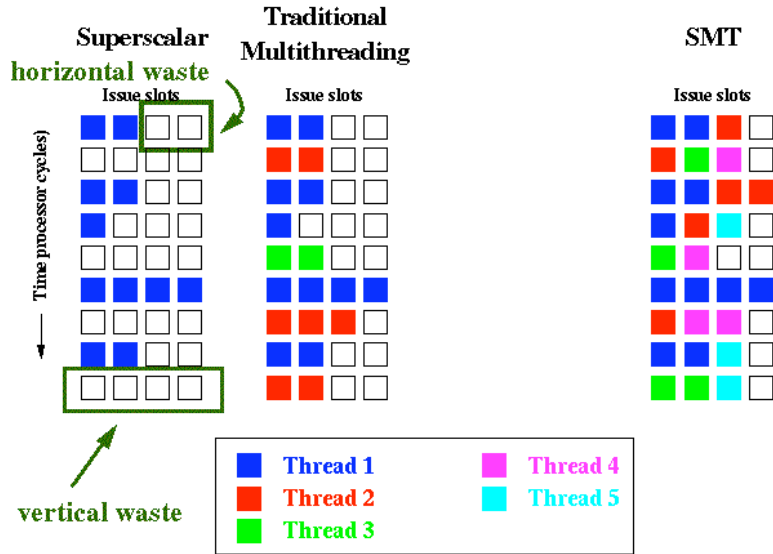

Spring 2007

CSE 471 - Multithreading

9

## Cray (Tera) MTA

### Goals

- the appearance of uniform memory access
- lightweight synchronization
- heterogeneous parallelism

Spring 2007

CSE 471 - Multithreading

10

## Cray (Tera) MTA

### Fine-grain multithreaded processor

- can switch to a different thread each cycle
  - switches to ready threads only
- up to 128 hardware contexts
  - lots of latency to hide, mostly from the multi-hop interconnection network
  - average instruction latency for computation: 22 cycles (i.e., 22 instruction streams needed to keep functional units busy)
  - average instruction latency including memory: 120 to 200-cycles (i.e., 120 to 200 instruction streams needed to hide all latency, on average)
- processor state for all 128 contexts
  - GPRs (total of 4K registers!)
  - status registers (includes the PC)
  - branch target registers/stream

## Cray (Tera) MTA

### Interesting features

- **No processor-side data caches**
  - increases the latency for data accesses but reduces the variation between ops
  - to avoid having to keep caches coherent
  - memory-side buffers instead
- L1 & L2 instruction caches
  - instruction accesses are more predictable & have no coherency problem
  - prefetch fall-through & target code

## Cray (Tera) MTA

### Interesting features

- **Trade-off between avoiding memory bank conflicts & exploiting spatial locality for data**
- conflicts:
  - memory distributed among hardware contexts
  - memory addresses are randomized to avoid conflicts
    - want to fully utilize all memory bandwidth
- locality:
  - run-time system can confine consecutive virtual addresses to a single (close-by) memory unit
    - used mainly for the stack

## Cray (Tera) MTA

### Interesting features

- **tagged memory**
  - indirectly set **full/empty bits** to prevent data races
    - prevents a consumer/producer from loading/overwriting a value before a producer/consumer has written/read it
    - example for the consumer:
      - set to empty when producer instruction starts executing
      - consumer instructions block if try to read the producer value
      - set to full when producer writes value
      - consumers can now read a valid value
  - explicitly set full/empty bits for thread synchronization
    - primarily used accessing shared data
      - lock: read memory location & set to empty
      - other readers are blocked
      - unlock: write & set to full

## Cray (Tera) MTA

### Interesting features

- **no paging**
  - want pages pinned down in memory for consistent latency
  - page size is 256MB
- **forward bit**
  - memory contents interpreted as a pointer & dereferenced
  - used for GC & null reference checking
- **user-mode trap handlers**
  - lighter weight
  - used for fatal exceptions, overflow, normalizing floating point numbers
  - not used for protection - user might override the RT
  - designed for user-written trap handlers, but too complicated for users

## Cray (Tera) MTA

### Compiler support

- **VLIW instructions**
  - memory/arithmetic/branch
  - load/store architecture
  - need a good code scheduler
- **memory dependence look-ahead**
  - field in a memory instruction that specifies the number of independent memory ops that follow
  - guarantees nonstalling instruction choice
  - improves memory parallelism
- **handling branches**
  - special instruction to store a branch target in a register before the branch is executed
  - can start prefetching the target code



## Cray (Tera) MTA

### Run-time support

- **number of executing threads**
  - protection domain: group of threads executing in the same virtual address space
  - RT sets the *maximum* number of thread contexts (instruction streams) a domain is allowed
  - domain can create & kill threads within that limit, depending on its need for them

## SMT: The Executive Summary

**Simultaneous multithreaded (SMT) processors** combine designs from:

- out-of-order superscalar processors
- traditional multithreaded processors

The combination enables a processor

- that issues & executes instructions from multiple threads simultaneously  
=> *converting* TLP to ILP
- in which threads share almost all hardware resources

## Performance Implications

Multiprogramming workload

- 2.5X on SPEC95, 4X on SPEC2000

Parallel programs

- ~1.7X on SPLASH2

Commercial databases

- 2-3X on TPC B; 1.5X on TPC D

Web servers & OS

- 4X on Apache and Digital Unix

## Does this Processor Sound Familiar?

Technology transfer =>

- 2-context Intel Hyperthreading
- 4-context IBM Power5
- 2-context Sun UltraSPARC on a 4-processor CMP
- 4-context Compaq 21464
- network processor & mobile device start-ups
- others in the wings

## An SMT Architecture

Three primary **goals** for this architecture:


1. Achieve significant throughput gains with multiple threads
2. Minimize the performance impact on a single thread executing alone
3. Minimize the microarchitectural impact on a conventional out-of-order superscalar design

Spring 2007

CSE 471 - Multithreading

21

## Implementing SMT

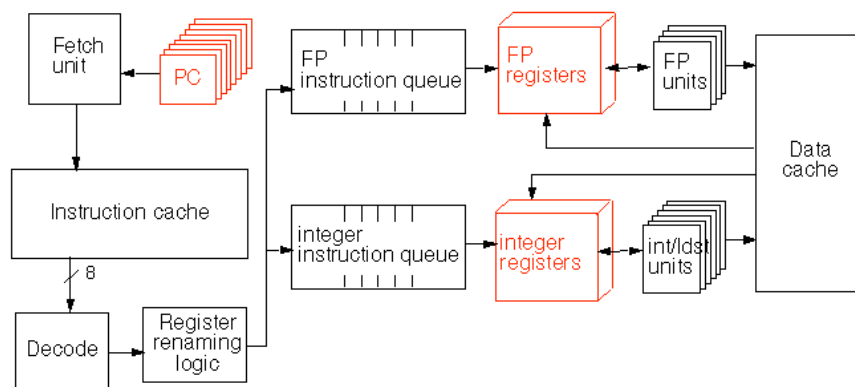

Spring 2007

CSE 471 - Multithreading

22

## Implementing SMT

### **No special hardware for scheduling instructions from multiple threads**

- use the out-of-order renaming & instruction scheduling mechanisms
- physical register pool model
- renaming hardware eliminates false dependences both within a thread (just like a superscalar) & between threads

How it works:

- map *thread-specific* architectural registers onto a pool of *thread-independent* physical registers
- operands are thereafter called by their physical names
- an instruction is issued when its operands become available & a functional unit is free
- instruction scheduler not consider thread IDs when dispatching instructions to functional units (unless threads have different priorities)

Spring 2007

CSE 471 - Multithreading

23

## From Superscalar to SMT

### **Extra pipeline stages for accessing thread-shared register files**

- $8 \text{ threads} * 32 \text{ registers} + \text{renaming registers}$

### **SMT instruction fetcher (ICOUNT)**

- fetch from 2 threads each cycle
  - count the number of instructions for each thread in the pre-execution stages
  - pick the 2 threads with the lowest number
- in essence fetching from the two highest throughput threads

Spring 2007

CSE 471 - Multithreading

24

## From Superscalar to SMT

### **Per-thread hardware**

- small stuff
- all part of current out-of-order processors
- none endangers the cycle time
  
- other per-thread processor state, e.g.,
  - program counters
  - return stacks
  - thread identifiers, e.g., with BTB entries, TLB entries
- per-thread bookkeeping for, e.g.,
  - instruction queue flush
  - instruction retirement
  - trapping

This is why there is only a 15% increase to Alpha 21464 chip area.

## Implementing SMT

### **Thread-shared hardware:**

- fetch buffers
- branch prediction structures
- instruction queues
- functional units
- active list
- all caches & TLBs
- store buffers & MSHRs

This is why there is little single-thread performance degradation (~1.5%).

## Architecture Research

**Concept & potential** of Simultaneous Multithreading

Designing the **microarchitecture**

- straightforward extension of out-of-order superscalars

I-fetch **thread chooser**

- 40% faster than round-robin

The **lockbox** for cheap synchronization

- orders of magnitude faster
- can parallelize previously unparallelizable codes

## Architecture Research

Software-directed **register deallocation**

- large register-file performance w. small register file

**Mini-threads**

- large SMT performance w. small SMTs

SMT instruction **speculation**

- don't execute as far down a wrong path
- speculative instructions don't get as far down the pipeline
- speculation keeps a good thread mix in the IQ
  - most important factor for performance

## Compiler Research

### **Tuning compiler optimizations** for SMT

- data decomposition: use cyclic iteration scheduling
- tiling: use cyclic tiling; no tile size sweet spot

Communicate **last-use information to HW** for early register deallocation

- now need fewer renaming registers

### **Compiling for fewer registers/thread**

- surprisingly little additional spill code (avg. 3%)

## OS Research

Analysis of **OS behavior** on SMT

- Kernel-kernel conflicts in I\$ & D\$ & branch mispredictions ameliorated by SMT instruction issue + thread-sharing in HW

**OS/runtime support** for mini-threads

- dedicated server: recompile OS for fewer registers
- multiprogrammed environment: multiple versions

**OS/runtime support** for executing threaded programs

- page mapping, stack offsetting, dynamic memory allocation, synchronization

## Others are Now Carrying the Ball

Fault detection & recovery  
Thread-level speculation  
Instruction & data prefetching  
Instruction issue hardware design  
Thread scheduling & thread priority  
Single-thread execution  
Profiling executing threads  
SMT-CMP hybrids  
Power considerations

## SMT Collaborators

### **UW**

Hank Levy  
Steve Gribble  
  
Dean Tullsen (UC San Diego)  
Jack Lo (VMWare)  
Sujay Parekh (IBM Yorktown)  
Brian Dewey (Microsoft)  
Manu Thambi (Microsoft)  
Josh Redstone (Google)  
Mike Swift (Wisconsin)  
Luke McDowell (Naval Academy)  
Steve Swanson (UC San Diego)  
Aaron Eakin (HP)  
Dimitriy Portnov (Google)

### **DEC/Compaq**

Joel Emer (now Intel)  
Rebecca Stamm  
Luiz Barroso (now Google)  
Kourosh Gharachorloo (now Google)

For more info on SMT:

<http://www.cs.washington.edu/research/smt>