

Control Hazards

The nub of the problem:

- In what pipeline stage does the processor fetch the next instruction?
- If that instruction is a conditional branch, when does the processor know whether the conditional branch is taken (execute code at the target address) or not taken (execute the sequential code)?
- What is the difference in cycles between them?

The cost of stalling until you know whether to branch

- number of cycles in between * branch frequency = the contribution to CPI due to branches

Predict the branch outcome to avoid stalling

Branch Prediction

Branch prediction:

- Resolve a branch hazard by predicting which path will be taken
- Proceed under that assumption
- If the prediction is correct, avoid delay of the branch hazard
- If the prediction is incorrect, flush the wrong-path instructions from the pipeline & fetch the right path

Performance improvement depends on:

- whether the prediction is correct (producing correct predictions is most of the innovation)
- how soon you can check the prediction

Branch Prediction

Dynamic branch prediction:

- the prediction determined at runtime & changes as program behavior changes
- branch prediction mechanism implemented in hardware
- common algorithm based on branch history
 - predict the branch **taken** if branched the last time
 - predict the branch **not-taken** if didn't branch the last time

Alternative: **static branch prediction**

- compiler-determined prediction
- fixed for the life of the program
- A likely algorithm?

Branch Prediction Buffer

Branch prediction buffer

- small memory indexed by the lower bits of the address of a branch instruction during the **fetch** stage
- contains a 1-bit prediction (which path the last branch to index to this BPB location took)
- do what the prediction says to do
- if the prediction is **taken** & it is **correct**
 - only incur a one-cycle penalty – why?
- if the prediction is **not taken** & it is **correct**
 - incur no penalty – why?
- if the prediction is **incorrect**
 - change the prediction
 - also flush the pipeline – why?
 - penalty is the same as if there were no branch prediction – why?


Two-bit Prediction

A single prediction bit does not work well with loops

- mispredicts the first & last iterations of a nested loop

Two-bit branch prediction for loops

- Algorithm: have to be wrong twice in a row before prediction is changed

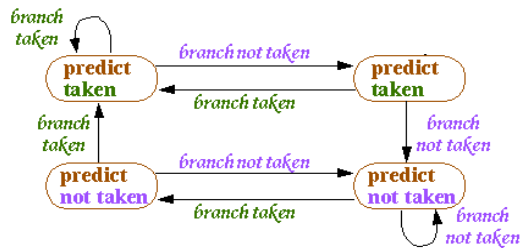

Spring 2011

CSE 471 - Dynamic Branch
Prediction

5

Two-bit Prediction

Works well when branches predominantly go in the same direction

- Why? A second check is made to make sure that a short & temporary change of direction does not change the prediction away from the dominant direction

Spring 2011

CSE 471 - Dynamic Branch
Prediction

6

Is Branch Prediction More Important Today?

Think about:

- Is the number of branches in code changing?
- Is modern hardware design changing the dynamic frequency of branches?
- Is it getting harder or easier to predict branch outcomes?
- Is the misprediction penalty changing?

Branch Prediction is More Important Today

Conditional branches still comprise about 20% of instructions

Correct predictions are more important today – why?

- **pipelines deeper**
branch not resolved until more cycles from fetching
therefore the **misprediction penalty** greater
 - cycle times smaller: more emphasis on throughput (performance)
 - more functionality between fetch & execute
- **multiple instruction issue** (superscalars & VLIW) & **multiple threads**
branch occurs almost every cycle
 - flushing & re-fetching more instructions
- **object-oriented programming**
more indirect branches which harder to predict
- **dual of Amdahl's Law**
other forms of pipeline stalling are being addressed so the portion of CPI due to branch delays is relatively larger

All this means that the potential stalling due to branches is greater

Branch Prediction is More Important Today

On the other hand,

- chips are denser so we can consider sophisticated HW solutions
- hardware cost is small compared to the performance gain

Technical Directions in Branch Prediction

1: Improve the prediction

- *correlated (2-level) predictor* (Pentiums)
- use both history & branch address (MIPS, Sun)
- hybrid local/global predictor (Pentium 4, Power5)

2: Determine the target earlier

- *branch target buffer* (Pentium, Itanium)
- next address in I-cache (UltraSPARC)
- *return address stack* (everybody)

3: Reduce misprediction penalty

- fetch both instruction streams (IBM mainframes)

4: Eliminate branch execution

- *predicated execution* (Itanium)

1: Correlated Predictor

The rationale:

- having the prediction depend on the outcome of only 1 branch might produce bad predictions
- some branch outcomes are correlated

example: same condition variable

```
if (d==0)
```

```
...
```

```
if (d!=0)
```

example: related condition variables

```
if (d==0)
```

```
    b=1;
```

```
if (b==1)
```

1: Correlated Predictor

more complicated example: related condition variables

```
if (x==2)          /* branch 1 */
```

```
    x=0;
```

```
if (y==2)          /* branch 2 */
```

```
    y=0;
```

```
if (x!=y)          /* branch 3 */
```

```
    do this; else do that;
```


- if branches 1 & 2 are taken, branch 3 is not taken

⇒ use a **history of the past m branches**
represents an execution path through the program
(but still n bits of prediction)

1: Correlated Predictor

General idea of correlated branch prediction:

- put the global branch history in a **global history register**
 - global history is a **shift register**: shift left in the new branch outcome
- use its value to access a **pattern history table (PHT)** of 2-bit saturating counters

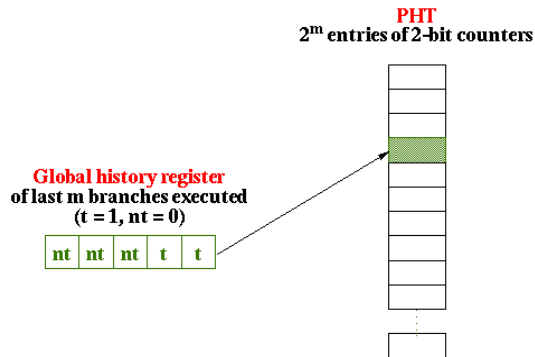

Spring 2011

CSE 471 - Dynamic Branch
Prediction

13

1: Correlated Predictor

Many implementation variations

- the number of branch history registers
 - 1 history register for all branches (global)
 - table of history registers, strive for 1 for each branch (private)
 - table of history registers, each shared by several branches (shared)
- the history length (size of history registers)
- the number of PHTs
- how access the PHT
- What is the trade-off?

Spring 2011

CSE 471 - Dynamic Branch
Prediction

14

1: Tournament Predictor

Combine branch predictors

- local, per-branch prediction, accessed by the low PC bits
- correlated prediction based on the last m branches, assessed by the global history register
- indicator of which had been the best predictor for this branch
 - 2-bit counter: increase for one, decrease for the other


2: Branch Target Buffer (BTB)

Cache that stores: the addresses of branches
the predicted target address
branch prediction bits (optional)

Accessed by PC address in fetch stage

if hit: address was for *this* branch instruction

fetch the target instruction if a hit (and if prediction bits say taken)

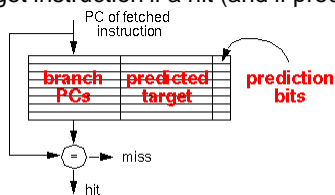

No branch delay if: prediction is taken & is correct
branch target is found in BTB
(assume BTB update is done in the next cycles)

2: Return Address Stack

The **bad** news:

- indirect jump targets are hard to predict
- registers for target calculation are accessed several stages after fetch

The **good** news: most indirect jumps (85%) are returns from functions

- optimize for this common case

Return address stack

- return address pushed on a call, popped on a return
- provides the return target early
- best for procedures that are called from multiple call sites
 - BTB would predict address of the return from the last call
- if “big enough”, can predict returns perfectly
 - these days 1-32 entries

4: Predicated Execution

Predicated instructions execute conditionally

- some other (previous) instruction evaluates a branch condition
- predicated instruction tests the condition & executes if the condition is true
- if the condition is false, predicated instruction isn't executed
- i.e., instruction execution is **predicated** on the condition

Eliminates conditional branch (expensive if mispredicted)

- changes a **control hazard** to a **data hazard**

Fetch both true & false paths

4 Predicated Execution

Example:

without predicated execution

```
sub    R10, R4, R5
beqz   R10, Label
add    R2, R1, R6
Label: or    R3, R2, R7
```

with predicated execution

```
sub    R10, R4, R5
add    R2, R1, R6, R10
or     R3, R2, R7
```

4 Predicated Execution

Is predicated execution a good idea?

Advantages of predicated execution

- + no branch hazard
 - especially good for hard to predict branches & deep pipelines
 - + creates straightline code; therefore better prefetching of instructions
- prefetching** = fetch instructions before you need them to hide instruction cache miss latency

4 Predicated Execution

Disadvantages of predicated execution

- instructions on both paths are executed
 - structural hazard or more hardware if hardware is not idle
 - effect on performance
 - effect on power
 - best for short code sequences
- hard to add predicated instructions to an existing instruction set
- additional register pressure
- complex conditions if nested loops (predicated instructions may depend on multiple conditions)
- good branch prediction might get the same effect

Calculating the Cost of Branches

Factors to consider:

- branch frequency (every 4-6 instructions)
- correct prediction rate
 - 1 bit: ~ 80% to 85%
 - 2 bit: ~ high 80s to low 90%
 - correlated branch prediction: ~ 95%
- misprediction penalty
 - RISCs: 4 -7 cycles
 - Pentiums: larger, at least 9 cycles, 15 on average
 - then have to multiply by the instruction width
- or misfetch penalty
 - have the correct prediction but not know the target address yet

Calculating the Cost of Branches

What is the probability that a branch is taken?

Given:

- 20% of branches are unconditional branches
- of conditional branches,
 - 66% branch forward & are evenly split between taken & not taken
 - the rest branch backwards & are always taken

Calculating the Cost of Branches

What is the contribution to CPI of conditional branch stalls, given:

- 15% branch frequency
- a BTB for conditional branches only with a
 - 10% miss rate
 - 3-cycle miss penalty
 - 92% prediction accuracy
 - 7 cycle misprediction penalty
- base CPI is 1

BTB result	Prediction	Frequency (per instruction)	Penalty (cycles)	<i>Stalls</i>
miss	--	$.15 * .10 = .015$	3	.045
hit	correct	$.15 * .90 * .92 = .124$	0	0
hit	incorrect	$.15 * .90 * .08 = .011$	7	.076
Total contribution to CPI				.121

Dynamic Branch Prediction, in Summary

Stepping back & looking forward,

how do you figure out whether branch prediction (or any other aspect of a processor design) is still important to improve?

- Look at technology trends
- How do the trends affect different aspects of prediction performance (or hardware cost or power consumption, etc.)?
- Given these effects, which factors become bottlenecks?
- What techniques can we devise to eliminate the bottlenecks?

Prediction Research

Predicting branches based on machine-learning algorithms

Predicting load addresses

Predicting variable values

Predicting which thread will hold a lock next

Predicting which thread should execute on a multithreaded processor

Predicting power consumption & when we can power-down processor components

Predicting when a fault might occur