

## CSE 143 Java

### Program Efficiency & Introduction to Complexity Theory

*Reading: Ch. 21 (go light on the math)*

11/11/2003

(c) 2001-3, University of Washington

16-1

## GREAT IDEAS IN COMPUTER SCIENCE

### ANALYSIS OF ALGORITHMIC COMPLEXITY

11/11/2003

(c) 2001-3, University of Washington

16-2

## Overview

- Measuring time and space used by algorithms
- Machine-independent measurements
- Costs of operations
- Asymptotic complexity –  $O()$  notation and complexity classes
- Comparing algorithms
- Performance tuning

11/11/2003

(c) 2001-3, University of Washington

16-3

## Comparing Algorithms

- Example: We'll see two different list implementations
  - Dynamic expanding array
  - Linked list
- Which is "better"?
- How do we measure?
  - Stopwatch? Why or why not?

11/11/2003

(c) 2001-3, University of Washington

16-4

## Program Efficiency & Resources

- Goal: Find way to measure "resource" usage in a way that is independent of particular machines or implementations
- Resources
  - Execution time
  - Execution space
  - Network bandwidth
  - others
- We will focus on execution time
  - Techniques/vocabulary apply to other resource measures

11/11/2003

(c) 2001-3, University of Washington

16-5

## Example

- What is the running time of the following method?

```
// Return the sum of the elements in array.
double sum(double[] data) {
    double ans = 0.0;
    for (int k = 0; k < data.length; k++) {
        ans = ans + data[k];
    }
    return ans;
}
```

- How do we analyze this?
- What does the question even mean?

11/11/2003

(c) 2001-3, University of Washington

16-6

## Analysis of Execution Time

1. First: describe the *size* of the problem in terms of one or more parameters
  - For sum, size of array makes sense
  - Often size of data structure, but can be magnitude of some numeric parameter, etc.
2. Then, count the number of *steps* needed *as a function of the problem size*
  - Need to define what a "step" is
    - First approximation: one simple statement
    - More complex statements will be multiple steps

11/11/2003

(c) 2001-3, University of Washington

16-7

## Cost of operations: Constant Time Ops

- Constant-time operations: each take one abstract time "step"
  - Simple variable declaration/initialization (`double sum = 0.0;`)
  - Assignment of numeric or reference values (`var = value;`)
  - Arithmetic operation (`+, -, *, /, %`)
  - Array subscripting (`a[index]`)
  - Simple conditional tests (`x < y, p != null`)
  - Operator `new` itself (not including constructor cost)
    - Note: `new` takes significantly longer than simple arithmetic or assignment, but its cost is independent of the problem we're trying to analyze
- Note: watch out for things like method calls or constructor invocations that look simple, but can be expensive

11/11/2003

(c) 2001-3, University of Washington

16-8

## Cost of operations: Zero-time Ops

- Can sometimes perform operations at compile time
  - Nothing left to do at runtime
- Variable declarations without initialization
  - `double[] overdrafts;`
- Variable declarations with compile-time constant initializers
  - `static final int maxButtons = 3;`
- Some casts (but not those that need a runtime check)
  - `int code = (int) "?";`

11/11/2003

(c) 2001-3, University of Washington

16-9

## Sequences of Statements

- Cost of  
 $S_1; S_2; \dots; S_n$   
is sum of the costs of  $S_1 + S_2 + \dots + S_n$

11/11/2003

(c) 2001-3, University of Washington

16-10

## Conditional Statement

- We're generally trying to figure out how long it *might* take to execute a statement (*worst case*), so the cost of

```
if (condition) {
    S1;
} else {
    S2;
}
```

is normally the max cost of S1 or S2 (plus cost of the condition)
- Other possibilities (less common)
  - *Best case* – use the min cost of S1 or S2
  - *Expected (average) case* – probabilistic analysis needed

11/11/2003

(c) 2001-3, University of Washington

16-11

## Analyzing Loops

- Basic analysis
  1. Calculate cost of each iteration
  2. Calculate number of iterations
  3. Total cost is the product of theseCaution -- sometimes need to add up the costs differently if cost of each iteration is not roughly the same
- Nested loops
  - Total cost is number of iterations or the outer loop times the cost of the inner loop
  - same caution as above

11/11/2003

(c) 2001-3, University of Washington

16-12

## Method Calls

- Cost for calling a function is cost of...
  - cost of **evaluating** the arguments (constant or non-constant)
  - + cost of actually **calling** the function (constant overhead)
  - + cost of **passing** each parameter (normally constant time in Java for both numeric and reference values)
  - + cost of **executing** the function body (constant or non-constant?)
- Note that "evaluating" and "passing" an argument are two different things

11/11/2003

(c) 2001-3, University of Washington

16-13

## Exercise

- Analyze the running time of `printMultTable`
- Pick the problem size
- Count the number of steps

```
// print multiplication table with
// n rows and columns
void printMultTable(int n) {
    for (int k=0; k <= n; k++) {
        printRow(k, n);
    }
}

// print row r with length n of a
// multiplication table
void printRow(int r, int n) {
    for (int k = 0; k <= r; k++) {
        System.out.print(r*k + " ");
    }
    System.out.println();
}
```

11/11/2003

(c) 2001-3, University of Washington

16-14

## Analysis

11/11/2003

(c) 2001-3, University of Washington

16-15

## Comparing Algorithms

- Suppose we analyze two algorithms and get these times (numbers of steps):
  - Algorithm 1:  $37n + 2n^2 + 120$
  - Algorithm 2:  $50n + 42$
- How do we compare these? What really matters?
- Answer: In the long run, the thing that is most interesting is the cost as the problem size  $n$  gets large
  - What are the costs for  $n=10$ ;  $n=100$ ;  $n=1,000$ ;  $n=1,000,000$ ?
  - Computers are so fast that how long it takes to solve small problems is rarely of interest

11/11/2003

(c) 2001-3, University of Washington

16-16

## Orders of Growth

- What happens as the problem size doubles?

$N$	$\log_2 N$	$5N$	$N \log_2 N$	$N^2$	$2^N$
8	3	40	24	64	256
16	4	80	64	256	65536
32	5	160	160	1024	$\sim 10^9$
64	6	320	384	4096	$\sim 10^{19}$
128	7	640	896	16384	$\sim 10^{38}$
256	8	1280	2048	65536	$\sim 10^{76}$
10000	13	50000	$10^5$	$10^8$	$\sim 10^{3010}$

11/11/2003

(c) 2001-3, University of Washington

16-17

## Asymptotic Complexity

- Asymptotic: Behavior of complexity function as problem size gets large
  - Only thing that really matters is higher-order term
  - Can drop low order terms and constants
- The asymptotic complexity gives us a (partial) way to answer "which algorithm is more efficient"
  - Algorithm 1:  $37n + 2n^2 + 120$  is proportional to  $n^2$
  - Algorithm 2:  $50n + 42$  is proportional to  $n$
- Graphs of functions are handy tool for comparing asymptotic behavior



11/11/2003

(c) 2001-3, University of Washington

16-18

## Big-O Notation

- Definition: If  $f(n)$  and  $g(n)$  are two complexity functions, we say that
$$f(n) = O(g(n)) \quad (\text{pronounced } f(n) \text{ is } O(g(n)) \text{ or is order } g(n))$$
if there is a constant  $c$  such that
$$f(n) \leq c \cdot g(n)$$
for all sufficiently large  $n$

11/11/2003

(c) 2001-3, University of Washington

16-19

## Exercise 1

- Prove that  $5n+3$  is  $O(n)$

11/11/2003

(c) 2001-3, University of Washington

16-20

## Exercise 2

- Prove that  $5n^2 + 42n + 17$  is  $O(n^2)$

11/11/2003

(c) 2001-3, University of Washington

16-21

## Implications

- The notation  $f(n) = O(g(n))$  is *not* an equality  
(yet another abuse of the  $=$  sign; c.f., assignment operator)
- Think of it as shorthand for
  - “ $f(n)$  grows at most like  $g(n)$ ” or
  - “ $f$  grows no faster than  $g$ ” or
  - “ $f$  is bounded by  $g$ ”
- $O()$  notation is a *worst-case* analysis
  - Generally useful in practice
  - Sometimes want *average-case* or *expected-time* analysis if worst-case behavior is not typical (but these are often harder to analyze)

11/11/2003

(c) 2001-3, University of Washington

16-22

## Complexity Classes

- Several common complexity classes (problem size  $n$ )
  - Constant time:  $O(k)$  or  $O(1)$
  - Logarithmic time:  $O(\log n)$  [Base doesn't matter. Why?]
  - Linear time:  $O(n)$
  - “ $n \log n$ ” time:  $O(n \log n)$
  - Quadratic time:  $O(n^2)$
  - Cubic time:  $O(n^3)$
  - ...
  - Exponential time:  $O(k^n)$
- $O(n^k)$  is often called *polynomial time*

11/11/2003

(c) 2001-3, University of Washington

16-23

## Rule of Thumb

- If the algorithm has **polynomial** time or better: **practical**
  - typical pattern: examining all data, a fixed number of times
- If the algorithm has **exponential** time: **impractical**
  - typical pattern: examine *all combinations* of data
- What to do if the algorithm is exponential?
  - Try to find a different algorithm
  - Some problems can be proved not to have a polynomial solution
  - Other problems don't have known polynomial solutions, despite years of study and effort
  - Sometimes you settle for an approximation
    - The correct answer most of the time, or an almost-correct answer all of the time

11/11/2003

(c) 2001-3, University of Washington

16-24

## Big-O Arithmetic

- For most common functions, comparison can be enormously simplified with a few simple rules of thumb
- Memorize complexity classes in order from smallest to largest:  $O(1)$ ,  $O(\log n)$ ,  $O(n)$ ,  $O(n \log n)$ ,  $O(n^2)$ , etc.
- Ignore constant factors  
 $300n + 5n^4 + 6 + 2^n = O(n + n^4 + 2^n)$
- Ignore all but highest order term  
 $O(n + n^4 + 2^n) = O(2^n)$

11/11/2003

(c) 2001-3, University of Washington

16-25

## Analyzing List Operations (1)



- We can use  $O()$  notation to compare the costs of different list implementations
- Operation                      Dynamic Array                      Linked List
  - Construct empty list
  - Size of the list
  - isEmpty
  - clear

11/11/2003

(c) 2001-3, University of Washington

16-26

## Analyzing List Operations (2)

- Operation                      Dynamic Array                      Linked List
  - Add item to end of list
  - Locate item (contains, indexOf)
  - Add or remove item once it has been located

11/11/2003

(c) 2001-3, University of Washington

16-27

## Wait! Isn't this totally bogus??

- Write better code!!
  - More clever hacking in the inner loops  
 (assembly language, special-purpose hardware in extreme cases)
- Moore's law: Speeds double every 18 months
  - Wait and buy a faster computer in a year or two!



- But ...

11/11/2003

(c) 2001-3, University of Washington

16-28

## How long is a Computer-Day?

- If a program needs  $f(n)$  microseconds to solve some problem, how big a problem can it solve in a day?
    - One day =  $1,000,000 \times 24 \times 60 \times 60 = 9 \times 10^{10}$  (approx)
- | $f(n)$       | $n$ such that $f(n) = \text{one day}$ |
|--------------|---------------------------------------|
| $n$          | $9 \times 10^{10}$                    |
| $5n$         | $2 \times 10^{10}$                    |
| $n \log_2 n$ | $3 \times 10^9$                       |
| $n^2$        | $3 \times 10^5$                       |
| $n^3$        | $4 \times 10^3$                       |
| $2^n$        | 36                                    |

11/11/2003

(c) 2001-3, University of Washington

16-29

## Speed Up The Computer by 1,000,000

- Suppose technology advances so that a future computer is 1,000,000 fast than today's

$f(n)$	original $n$	speedup on future machine
$n$	$9 \times 10^{10}$	million times larger
$5n$	$2 \times 10^{10}$	million times larger
$n \log_2 n$	$3 \times 10^9$	60,000 times larger
$n^2$	$3 \times 10^5$	1,000 times larger
$n^3$	$4 \times 10^3$	100 times larger
$2^n$	36	+20




11/11/2003

(c) 2001-3, University of Washington

16-30

### Practical Advice For Speed Lovers

- First pick the right algorithm and data structure
  - Implement it carefully, insuring correctness
- Then optimize for speed – but only where it matters
  - Constants do matter in the real world
  - Clever coding can speed things up, but the result is likely to be harder to read, modify
- Use tools to find hotspots – concentrate on these




11/11/2003

(c) 2001-3, University of Washington

16-31

### More Advice...

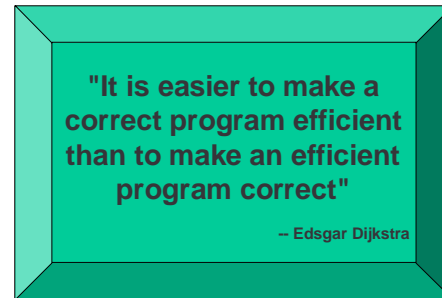

11/11/2003

(c) 2001-3, University of Washington

16-32

### Summary

- Analyze algorithm sufficiently to determine complexity
- Compare algorithms by comparing asymptotic complexity
- For large problems, an asymptotically faster algorithm will always trump clever coding tricks
- Optimize/tune only things that actually matter, once you've picked the best algorithm

11/11/2003

(c) 2001-3, University of Washington

16-33

### Computer Science Note

- Algorithmic complexity theory is one of the key intellectual contributions of Computer Science
- Typical problems
  - What is the worst/average/best-case performance of an algorithm?
  - What is the best complexity bound for all algorithms that solve a particular problem?
- Interesting and (in many cases) complex, sophisticated math
  - Probabilistic and statistical as well as discrete
- Still some key open problems
  - Most notorious:  $P \neq NP$

11/11/2003

(c) 2001-3, University of Washington

16-34