

Texture


Readings: Ch 7: all of it plus Carson paper

- Structural vs. Statistical Approaches
- Edge-Based Measures
- Local Binary Patterns
- Co-occurrence Matrices
- Laws Filters & Gabor Filters
- Blobworld Texture Features that select scale

Texture


Texture is a description of the spatial arrangement of color or intensities in an image or a selected region of an image.

Structural approach: a set of texels in some regular or repeated pattern

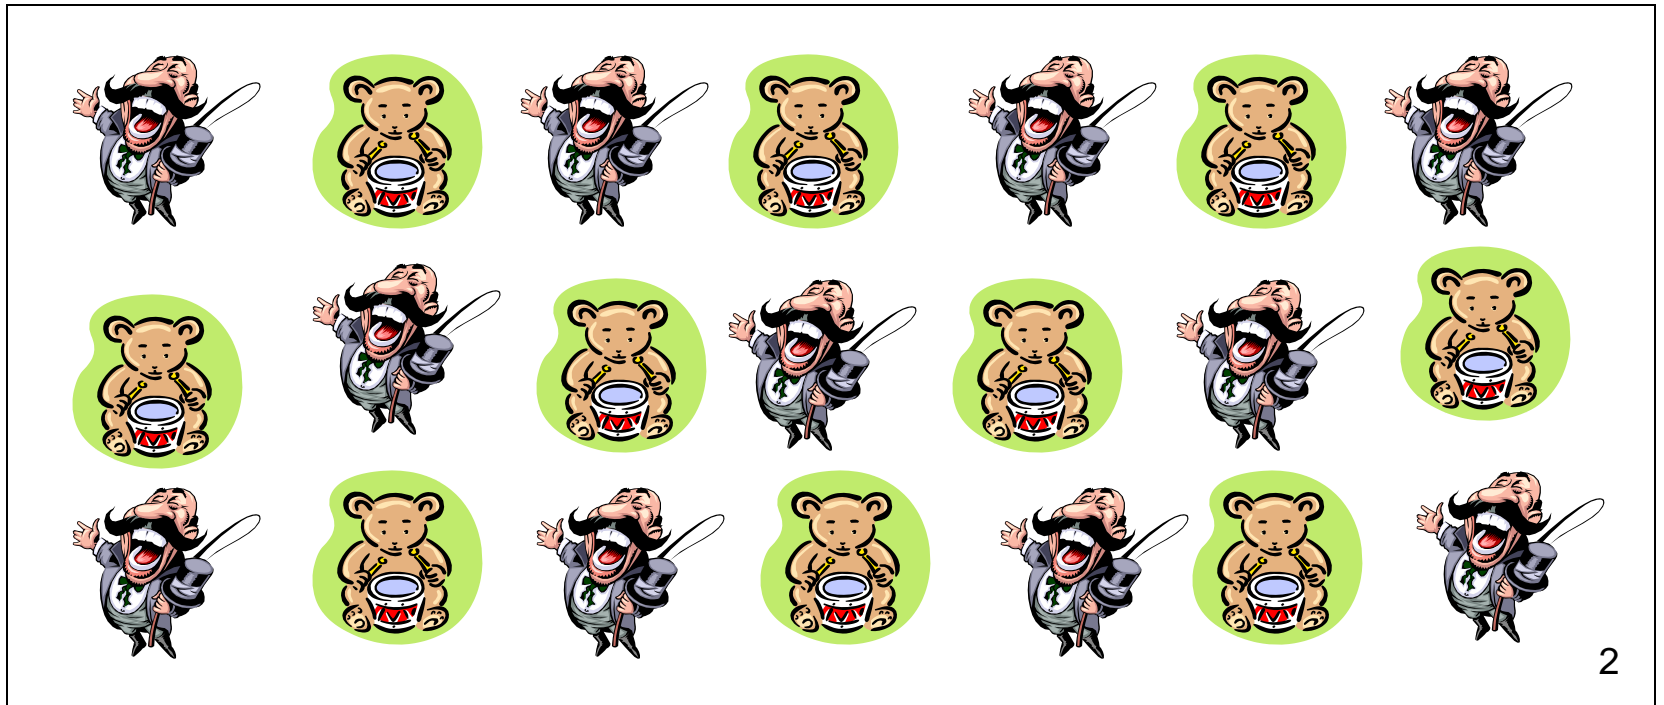


Problem with Structural Approach

How do you decide what is a texel?

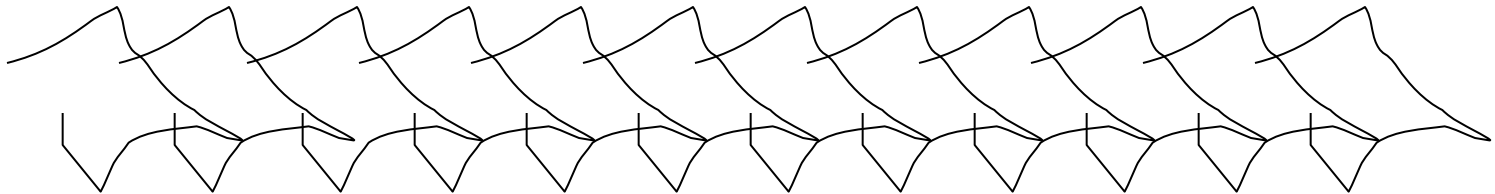


Ideas?

Natural Textures from VisTex

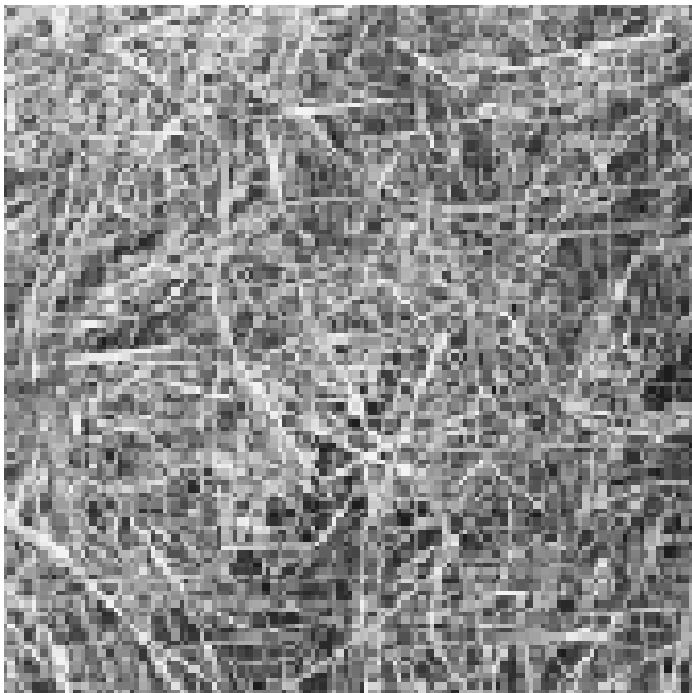

grass

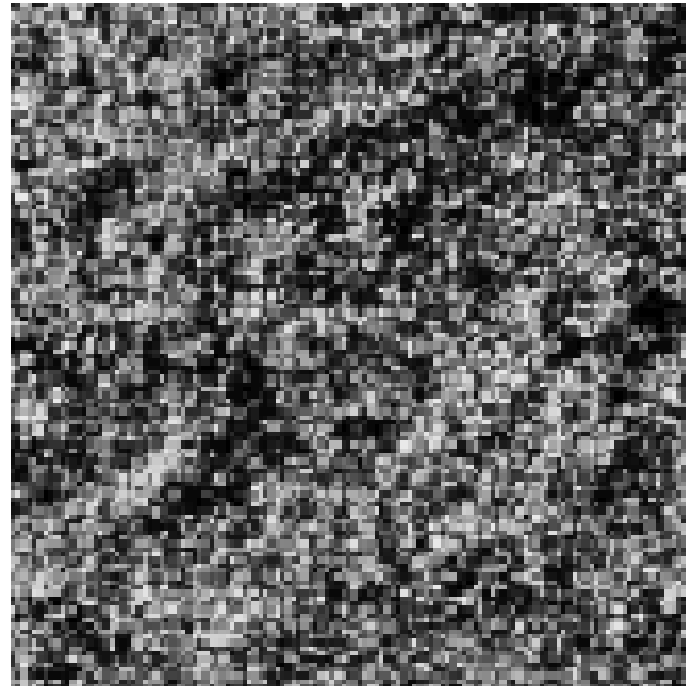

leaves

What/Where are the texels?

The Case for Statistical Texture

- Segmenting out texels is difficult or impossible in real images.
- Numeric quantities or statistics that describe a texture can be computed from the gray tones (or colors) alone.
- This approach is less intuitive, but is computationally efficient.
- It can be used for both classification and segmentation.

Some Simple Statistical Texture Measures

1. Edge Density and Direction

- Use an edge detector as the first step in texture analysis.
- The number of edge pixels in a fixed-size region tells us how busy that region is.
- The directions of the edges also help characterize the texture

Two Edge-based Texture Measures

1. edgeness per unit area

$$F_{\text{edgeness}} = |\{ p \mid \text{gradient_magnitude}(p) \geq \text{threshold} \}| / N$$

where N is the size of the unit area

2. edge magnitude and direction histograms

$$F_{\text{magdir}} = (H_{\text{magnitude}}, H_{\text{direction}})$$


where these are the normalized histograms of gradient magnitudes and gradient directions, respectively.

Example


Original Image



Frei-Chen
Edge Image

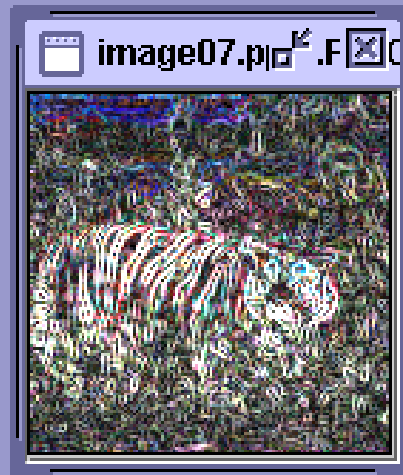


Thresholded
Edge Image

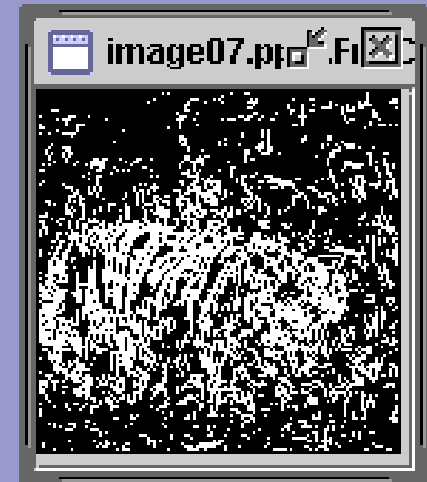

Local Binary Pattern Measure


- For each pixel p , create an 8-bit number $b_1 b_2 b_3 b_4 b_5 b_6 b_7 b_8$, where $b_i = 0$ if neighbor i has value less than or equal to p 's value and 1 otherwise.
- Represent the texture in the image (or a region) by the histogram of these numbers.

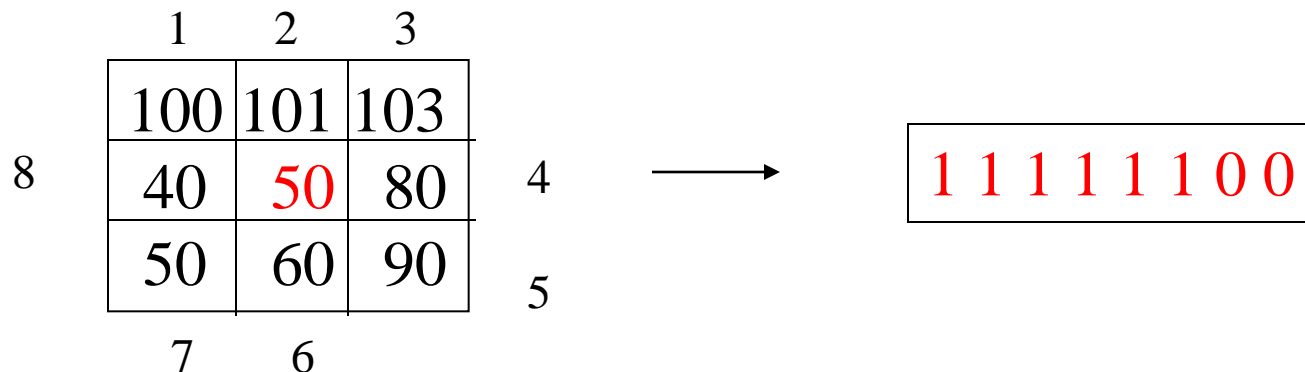

Example

Fids (Flexible Image Database System) is retrieving images similar to the query image using LBP texture as the texture measure and comparing their LBP histograms

Fids demo

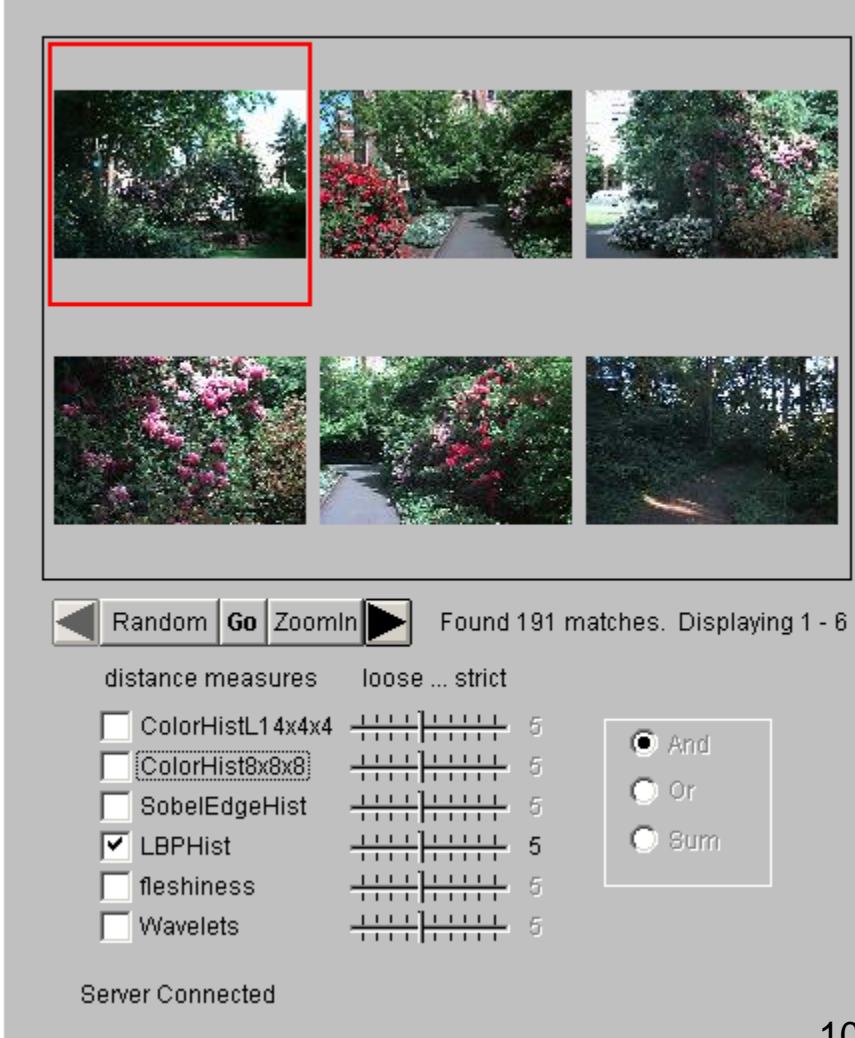

The screenshot shows the Fids demo interface. At the top, there is a grid of six images. The first image in the top-left corner is highlighted with a red border. Below the grid, there are navigation buttons: a left arrow, "Random", "Go", "ZoomIn", and a right arrow. To the right of these buttons, it says "Found 191 matches. Displaying 1 - 6". Below the navigation buttons, there are two columns of distance measures. The first column has checkboxes for "ColorHistL14x4x4", "ColorHist8x8x8", "SobelEdgeHist", "LBPHist", "fleshiness", and "Wavelets". The second column has a slider for "loose ... strict" with a value of 5. To the right of the distance measures, there is a radio button menu with options "And", "Or", and "Sum". At the bottom, it says "Server Connected".

Found 191 matches. Displaying 1 - 6

distance measures loose ... strict

<input type="checkbox"/>	ColorHistL14x4x4		5
<input type="checkbox"/>	ColorHist8x8x8		5
<input type="checkbox"/>	SobelEdgeHist		5
<input checked="" type="checkbox"/>	LBPHist		5
<input type="checkbox"/>	fleshiness		5
<input type="checkbox"/>	Wavelets		5

Server Connected

Example

Fids demo

Low-level measures don't always find semantically similar images.

The screenshot shows the Fids demo interface. At the top, a grid of six images is displayed. The first image in the top row is highlighted with a red border. Below the grid, there are navigation buttons: 'Random', 'Go', 'ZoomIn', and a right arrow. The text 'Found 119 matches. Displaying 1 - 6' is visible. Below the navigation buttons, there are controls for distance measures and logical operators. The distance measures section includes checkboxes for 'ColorHistL14x4x4', 'ColorHist8x8x8', 'SobelEdgeHist', 'LBPHist' (checked), 'fleshiness', and 'Wavelets'. Each measure has a slider set to 5. The logical operators section includes radio buttons for 'And' (selected), 'Or', and 'Sum'. On the right side, there are two buttons: 'Put In Cart' and 'Check Out'. Below these buttons, there is a text box with the instruction 'A double click on an image means:' and two radio buttons: 'Set query / Go' (selected) and 'Zoom in'. At the bottom left, the text 'Server Connected' is displayed.

Put In Cart

Check Out

Found 119 matches. Displaying 1 - 6

distance measures loose ... strict

<input type="checkbox"/>	ColorHistL14x4x4		5
<input type="checkbox"/>	ColorHist8x8x8		5
<input type="checkbox"/>	SobelEdgeHist		5
<input checked="" type="checkbox"/>	LBPHist		5
<input type="checkbox"/>	fleshiness		5
<input type="checkbox"/>	Wavelets		5

And
 Or
 Sum

A double click on an image means:
 Set query / Go
 Zoom in

Server Connected

Co-occurrence Matrix Features


A co-occurrence matrix is a 2D array C in which

- Both the rows and columns represent a set of possible image values.
- $C_d(i,j)$ indicates how many times value i co-occurs with value j in a particular spatial relationship d .
- The spatial relationship is specified by a vector $d = (dr,dc)$.

Co-occurrence Example

1	1	0	0
1	1	0	0
0	0	2	2
0	0	2	2
0	0	2	2
0	0	2	2

gray-tone
image

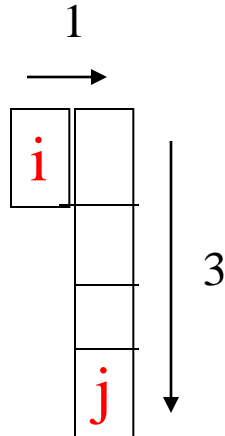

$d = (3, 1)$

	0	1	2
0	1	0	3
1	2	0	2
2	0	0	1

co-occurrence
matrix

C_d

From C_d we can compute N_d , the normalized co-occurrence matrix, where each value is divided by the sum of all the values.

Co-occurrence Features

What do these measure?

$$\text{Energy} = \sum_i \sum_j N_d^2(i, j) \quad (7.7)$$

$$\text{Entropy} = - \sum_i \sum_j N_d(i, j) \log_2 N_d(i, j) \quad (7.8)$$

$$\text{Contrast} = \sum_i \sum_j (i - j)^2 N_d(i, j) \quad (7.9)$$

$$\text{Homogeneity} = \sum_i \sum_j \frac{N_d(i, j)}{1 + |i - j|} \quad (7.10)$$

$$\text{Correlation} = \frac{\sum_i \sum_j (i - \mu_i)(j - \mu_j) N_d(i, j)}{\sigma_i \sigma_j} \quad (7.11)$$

where μ_i, μ_j are the means and σ_i, σ_j are the standard deviations of the row and column sums.


Energy measures uniformity of the normalized matrix.

But how do you choose d?

- This is actually a critical question with **all** the statistical texture methods.
- Are the “texels” tiny, medium, large, all three ...?
- Not really a solved problem.

Zucker and Terzopoulos suggested using a χ^2 statistical test to select the value(s) of d that have the most structure for a given class of images.

Example

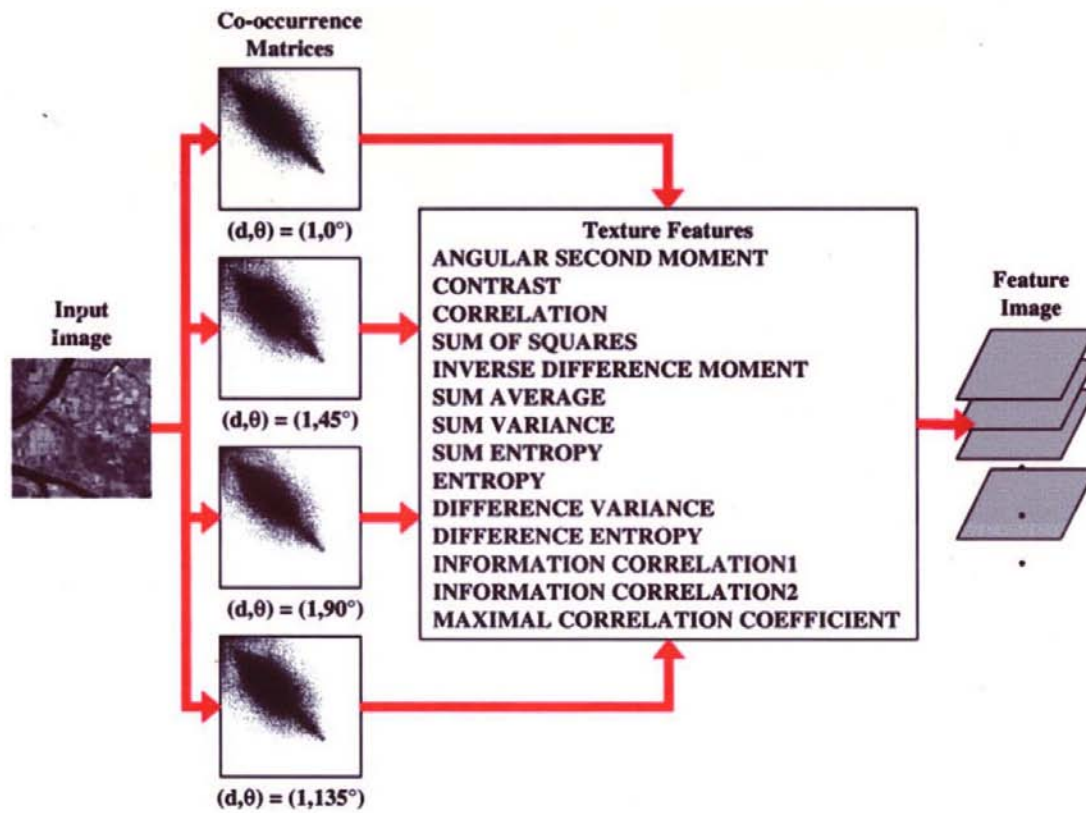

Laws' Texture Energy Features

- Signal-processing-based algorithms use texture filters applied to the image to create filtered images from which texture features are computed.
- The Laws Algorithm
 - **Filter** the input image using texture filters.
 - **Compute texture energy** by summing the absolute value of filtering results in local neighborhoods around each pixel.
 - **Combine features** to achieve rotational invariance.

Law's texture masks (1)

$$\begin{array}{lll} \text{L5} & (\text{Level}) & = \begin{bmatrix} 1 & 4 & 6 & 4 & 1 \end{bmatrix} \\ \text{E5} & (\text{Edge}) & = \begin{bmatrix} -1 & -2 & 0 & 2 & 1 \end{bmatrix} \\ \text{S5} & (\text{Spot}) & = \begin{bmatrix} -1 & 0 & 2 & 0 & -1 \end{bmatrix} \\ \text{R5} & (\text{Ripple}) & = \begin{bmatrix} 1 & -4 & 6 & -4 & 1 \end{bmatrix} \end{array}$$

- (L5) (Gaussian) gives a center-weighted local average
- (E5) (gradient) responds to row or col step edges
- (S5) (LOG) detects spots
- (R5) (Gabor) detects ripples

Law's texture masks (2)

Creation of 2D Masks

- **1D Masks are “multiplied” to construct 2D masks:**
mask E5L5 is the “product” of E5 and L5 -

$$\begin{array}{c} \mathbf{E5} \end{array} \begin{bmatrix} -1 \\ -2 \\ 0 \\ 2 \\ 1 \end{bmatrix} \times \begin{array}{c} \mathbf{L5} \end{array} \begin{bmatrix} 1 & 4 & 6 & 4 & 1 \end{bmatrix} = \begin{array}{c} \mathbf{E5L5} \end{array} \begin{bmatrix} -1 & -4 & -6 & -4 & -1 \\ -2 & -8 & -12 & -8 & -1 \\ 0 & 0 & 0 & 0 & 0 \\ 2 & 8 & 12 & 8 & 2 \\ 1 & 4 & 6 & 4 & 1 \end{bmatrix}$$

9D feature vector for pixel

- Subtract mean neighborhood intensity from (center) pixel
- Apply 16 5x5 masks to get 16 filtered images F_k , $k=1$ to 16
- Produce 16 texture energy maps using 15x15 windows

$$E_k[r,c] = \sum |F_k[i,j]|$$

- Replace each distinct pair with its average map:
- 9 features (9 filtered images) defined as follows:

L5E5/E5L5

L5R5/R5L5

E5S5/S5E5

S5S5

R5R5


L5S5/S5L5

E5E5


E5R5/R5E5

S5R5/R5S5

Laws Filters

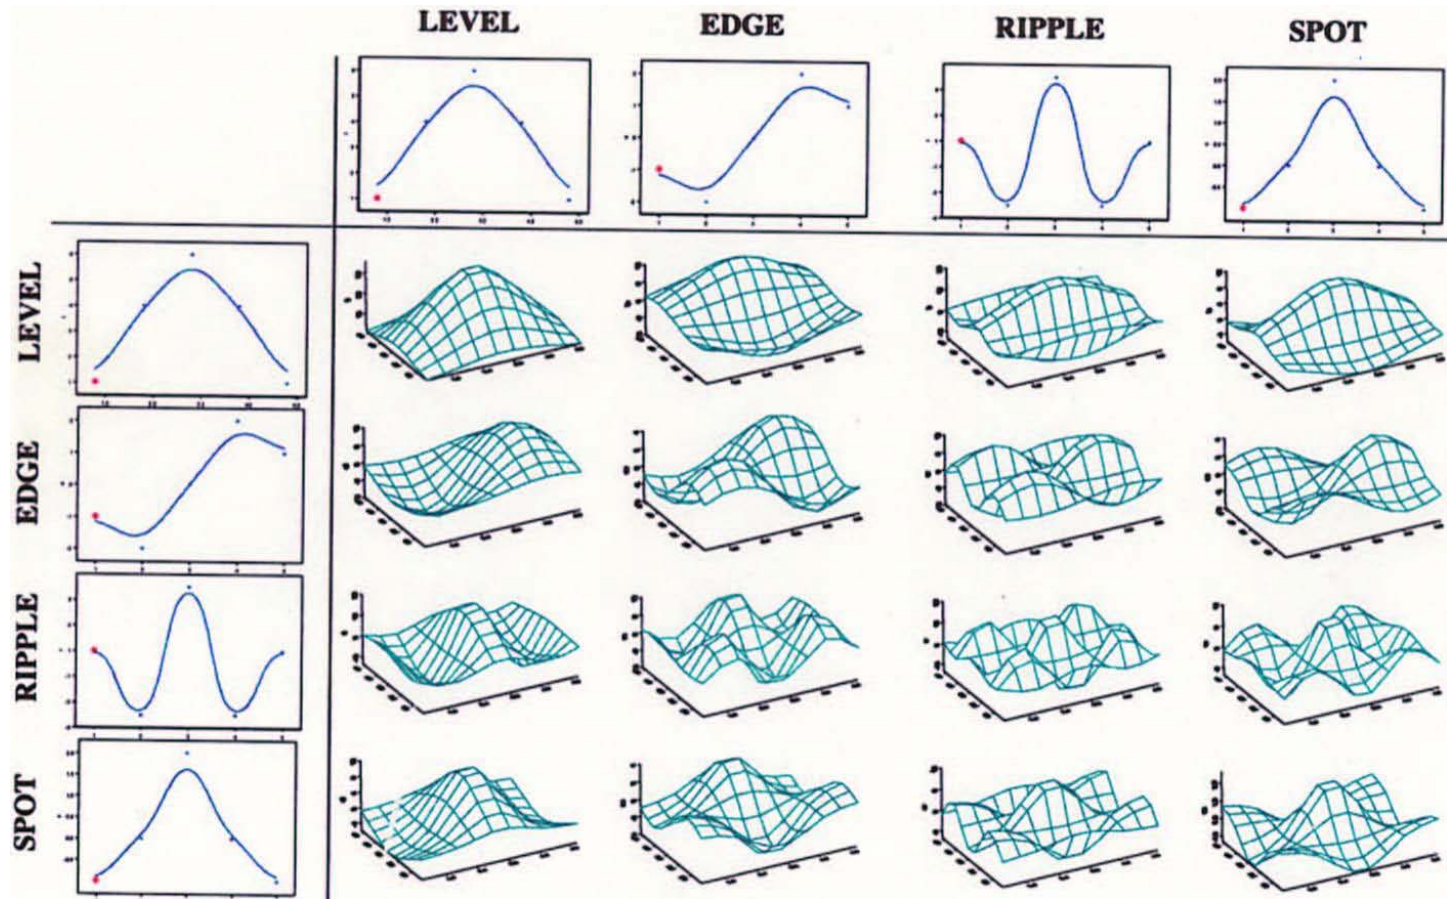

Laws Process

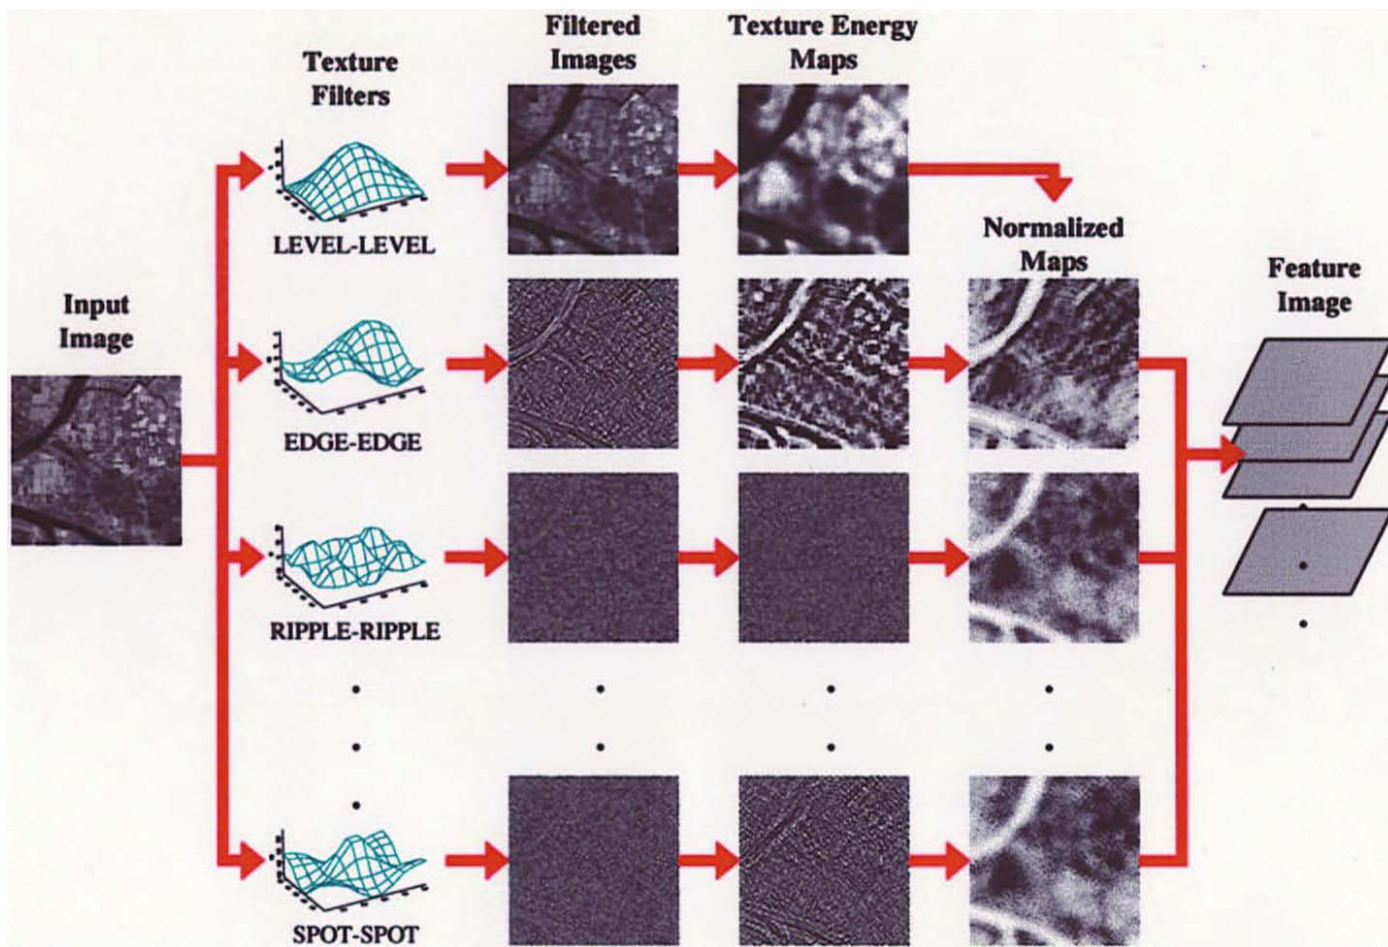

Example: Using Laws Features to Cluster


water



tiger



(a) Original image



(b) Segmentation into 4 clusters


fence




flag



grass




(c) Original image




(d) Segmentation into 4 clusters


small flowers



big flowers



(e) Original image



(f) Segmentation into 3 clusters

Is there a neighborhood size problem with Laws?



Features from sample images

Table 7.2: Laws texture energy measures for major regions of the images of Figure 7.8.



Region	E5E5	S5S5	R5R5	E5L5	S5L5	R5L5	S5E5	R5E5	R5S5
Tiger	168.1	84.0	807.7	553.7	354.4	910.6	116.3	339.2	257.4
Water	68.5	36.9	366.8	218.7	149.3	459.4	49.6	159.1	117.3
Flags	258.1	113.0	787.7	1057.6	702.2	2056.3	182.4	611.5	350.8
Fence	189.5	80.7	624.3	701.7	377.5	803.1	120.6	297.5	215.0
Grass	206.5	103.6	1031.7	625.2	428.3	1153.6	146.0	427.5	323.6
Small flowers	114.9	48.6	289.1	402.6	241.3	484.3	73.6	158.2	109.3
Big flowers	76.7	28.8	177.1	301.5	158.4	270.0	45.6	89.7	62.9
Borders	15.3	6.4	64.4	92.3	36.3	74.5	9.3	26.1	19.5

Gabor Filters


- Similar approach to Laws
- Wavelets at different frequencies and different orientations

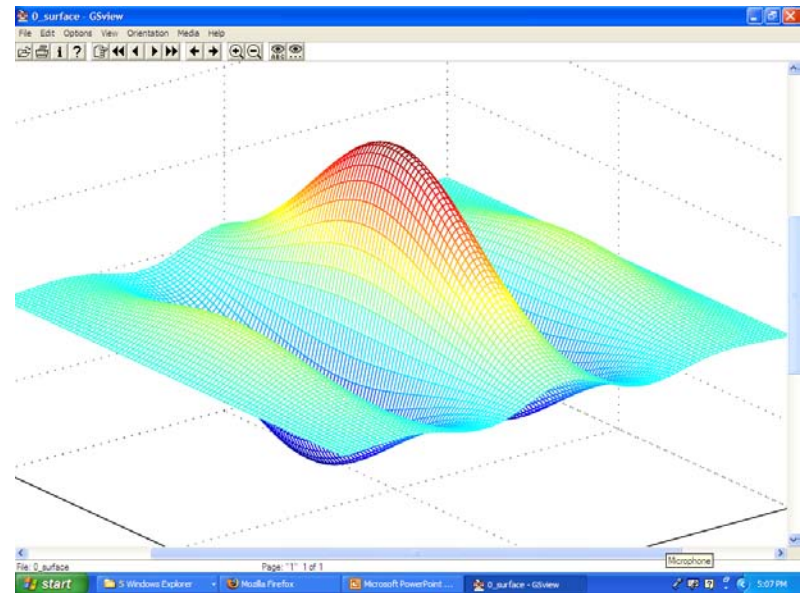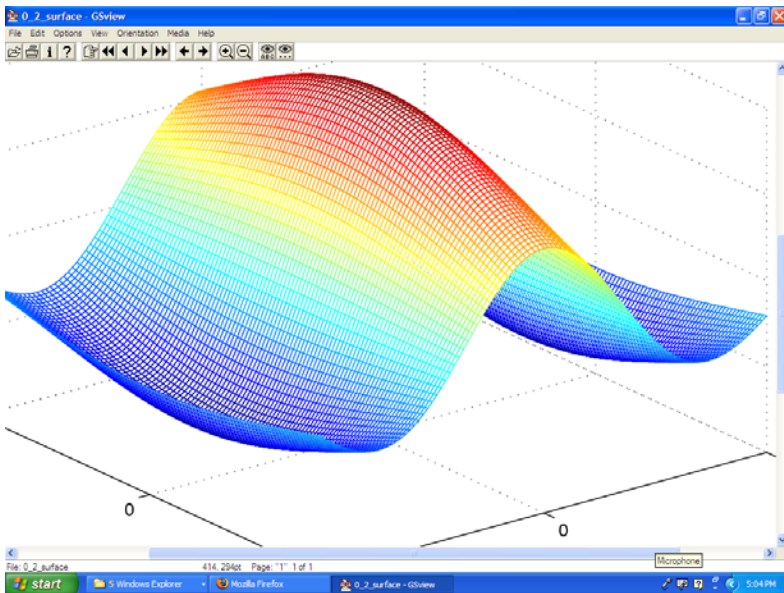

Gabor Filters

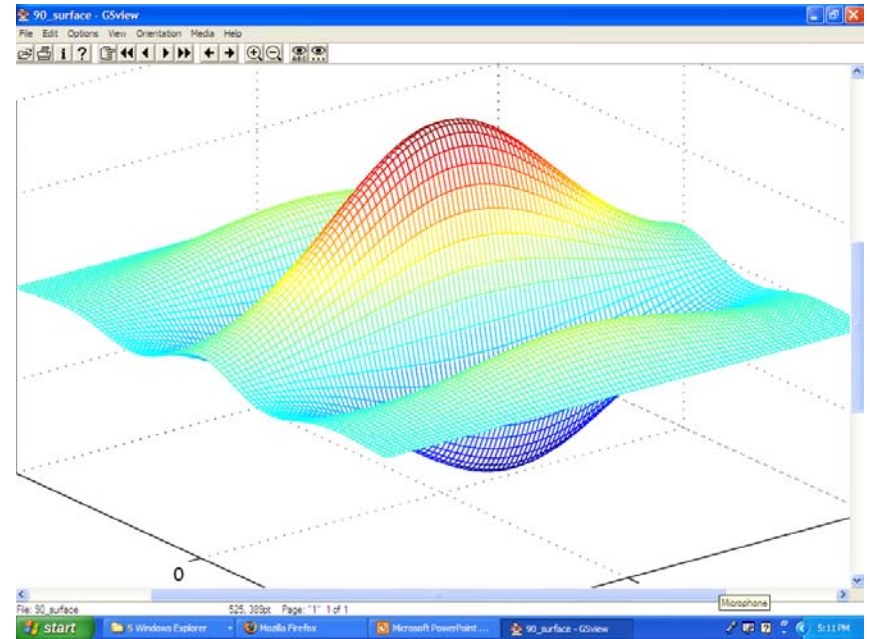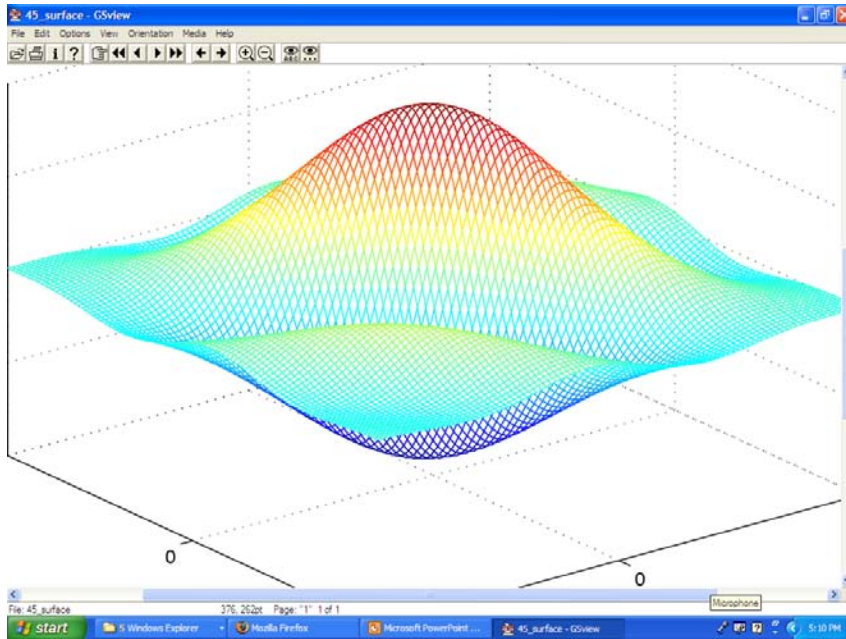

Gabor Filters

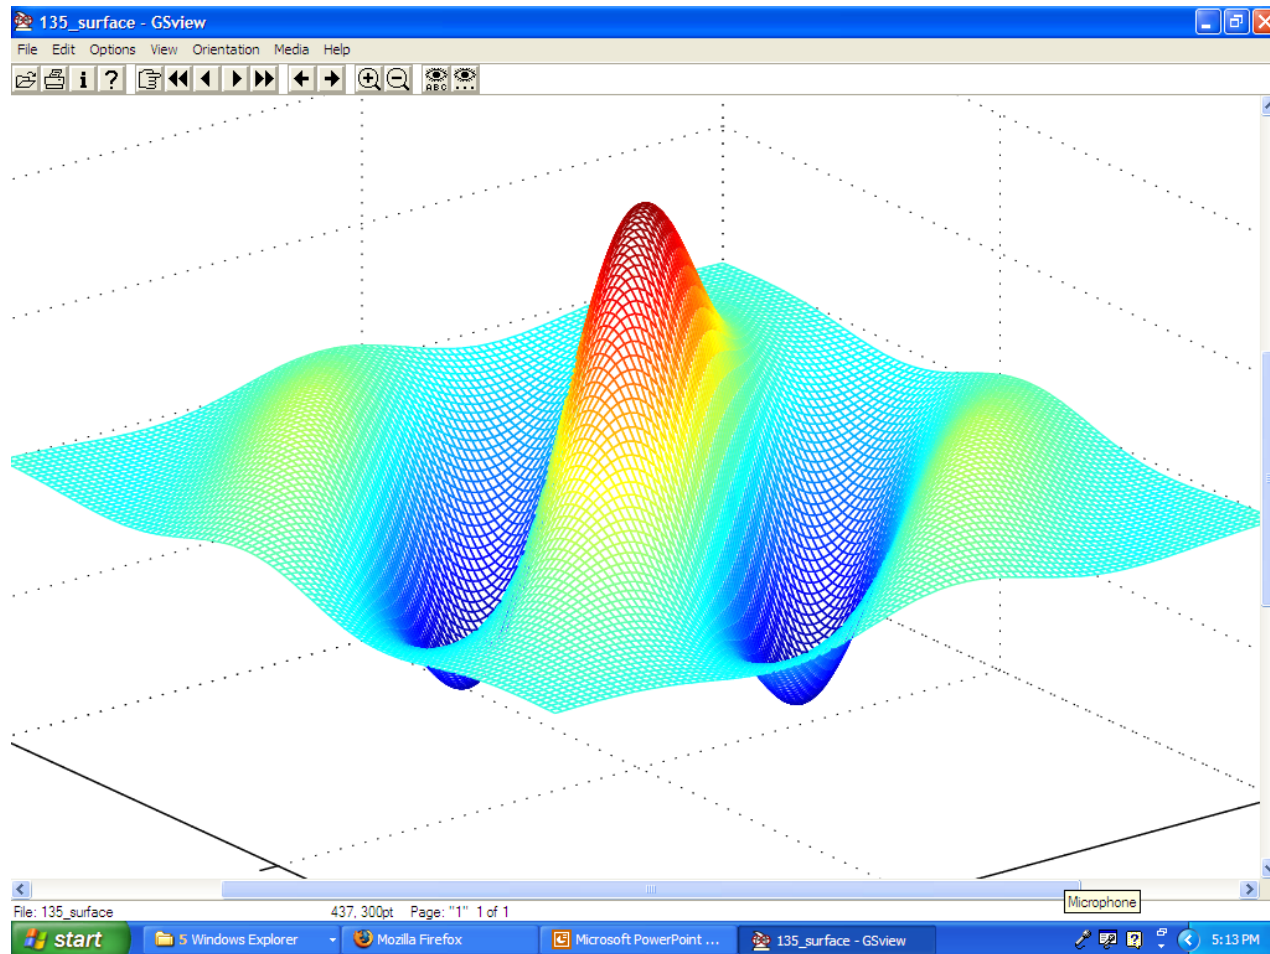

Segmentation with Color and Gabor-Filter Texture (Smeulders)




Blobworld Texture Features

- Choose the **best scale** instead of using fixed scale(s)
- Used successfully in color/texture segmentation in Berkeley's Blobworld project

Feature Extraction

- Algorithm: Select an appropriate scale for each pixel and extract features for that pixel at the selected scale

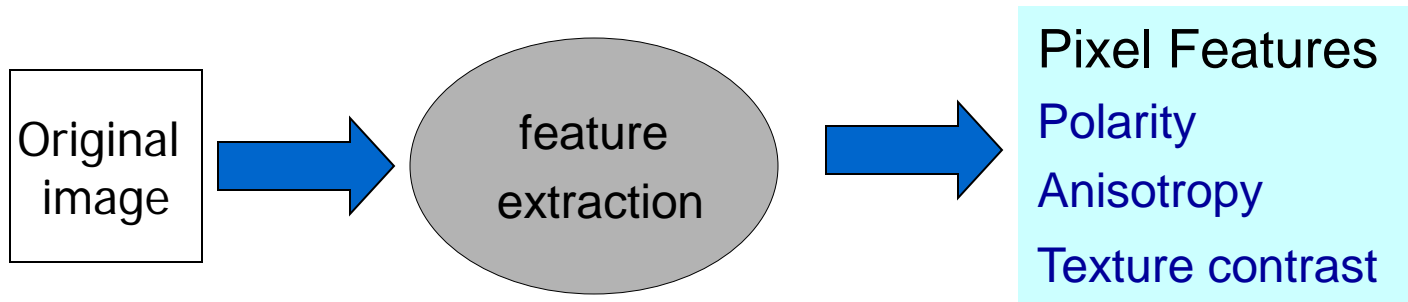

Texture Scale

- Texture is a local neighborhood property.
- Texture features computed at a wrong scale can lead to confusion.
- Texture features should be computed at a scale which is appropriate to the local structure being described.




The white rectangles show some sample texture scales from the image.

Scale Selection Terminology

- Gradient of the L* component (assuming that the image is in the L*a*b* color space) : $\nabla I = \begin{bmatrix} I_x \\ I_y \end{bmatrix}$

- Gaussian filter : $G_\sigma(x, y)$ of size σ

- Second moment matrix: $M_\sigma(x, y) = G_\sigma(x, y) * (\nabla I)(\nabla I)^T$ $\begin{bmatrix} I_x^2 & I_x I_y \\ I_x I_y & I_y^2 \end{bmatrix}$



original



I_x



I_x^2



$G * I_x^2$



Note: σ controls the size of the window around each pixel [1 2 5 10 17 26 37 50].

Computing Second Moment Matrix M_{σ}


1. First compute 3 separate images for
 - I_x^2
 - I_y^2
 - $I_x I_y$
2. Then apply a Gaussian filter to each of these images.
3. Then $M_{\sigma}(i,j)$ is computed from $I_x^2(i,j)$, $I_y^2(i,j)$, and $I_x I_y(i,j)$.

Scale Selection (continued)


- Make use of polarity (a measure of the extent to which the gradient vectors in a certain neighborhood all point in the same direction) to select the scale at which M_σ is computed

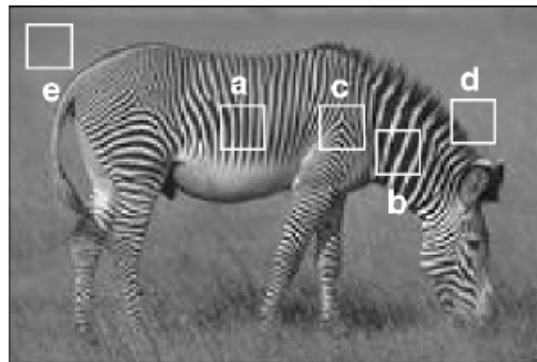


(a)



(b)



(c)



(d)



(e)

Edge: polarity is close to 1 for all scales σ
Texture: polarity varies with σ
Uniform: polarity takes on arbitrary values

Scale Selection (continued)


polarity p_σ

$$p_\sigma = \frac{|E_+ - E_-|}{E_+ + E_-}$$

$$E_+ = \sum_{x,y} G_\sigma(x,y) [\nabla I \cdot \hat{n}]_+$$

$$E_- = \sum_{x,y} G_\sigma(x,y) [\nabla I \cdot \hat{n}]_-$$

- \mathbf{n} is a unit vector perpendicular to the dominant orientation.
- The notation $[x]_+$ means x if $x > 0$ else 0
The notation $[x]_-$ means x if $x < 0$ else 0
- We can think of E_+ and E_- as measures of how many gradient vectors in the window are on the positive side and how many are on the negative side of the dominant orientation in the window.

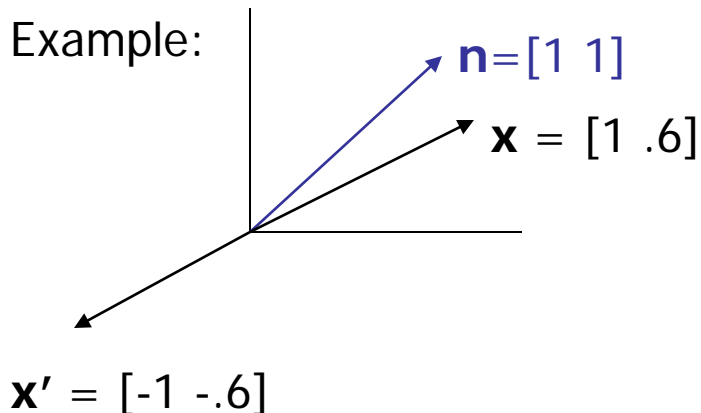

Scale Selection (continued)

- Texture scale selection is based on the derivative of the polarity with respect to scale σ .
- Algorithm:
 1. Compute polarity at every pixel in the image for $\sigma_k = k/2$, ($k = 0, 1 \dots 7$).
 2. Convolve each polarity image with a Gaussian with standard deviation $2k$ to obtain a smoothed polarity image.
 3. For each pixel, the selected scale is the first value of σ for which the difference between values of polarity at successive scales is less than 2 percent.

Texture Features Extraction


- Extract the texture features at the selected scale

- **Polarity** (polarity at the selected scale) : $p = p_{\sigma^*}$

- **Anisotropy** : $a = 1 - \lambda_2 / \lambda_1$

- λ_1 and λ_2 denote the eigenvalues of M_{σ}

- λ_2 / λ_1 measures the degree of orientation: when λ_1 is large compared to λ_2 the local neighborhood possesses a dominant orientation. When they are close, no dominant orientation. When they are small, the local neighborhood is constant.




- **Local Contrast**: $C = 2(\lambda_1 + \lambda_2)^{3/2}$

A pixel is considered homogeneous if $\lambda_1 + \lambda_2 <$ a local threshold

Blobworld Segmentation Using Color and Texture




Application to Protein Crystal Images

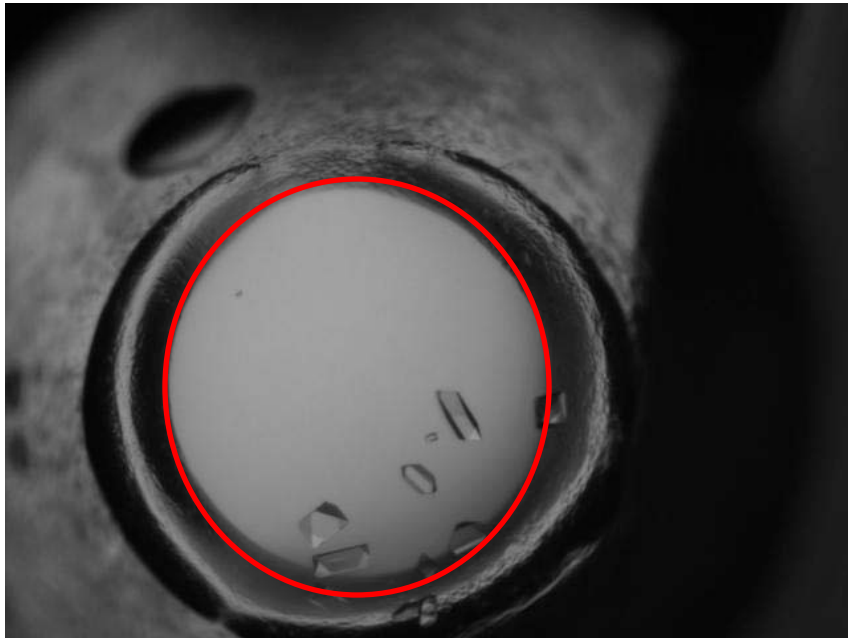


Original image in PGM (Portable Gray Map)
format

- K-mean clustering result (number of clusters is equal to 10 and similarity measure is Euclidean distance)
- Different colors represent different textures

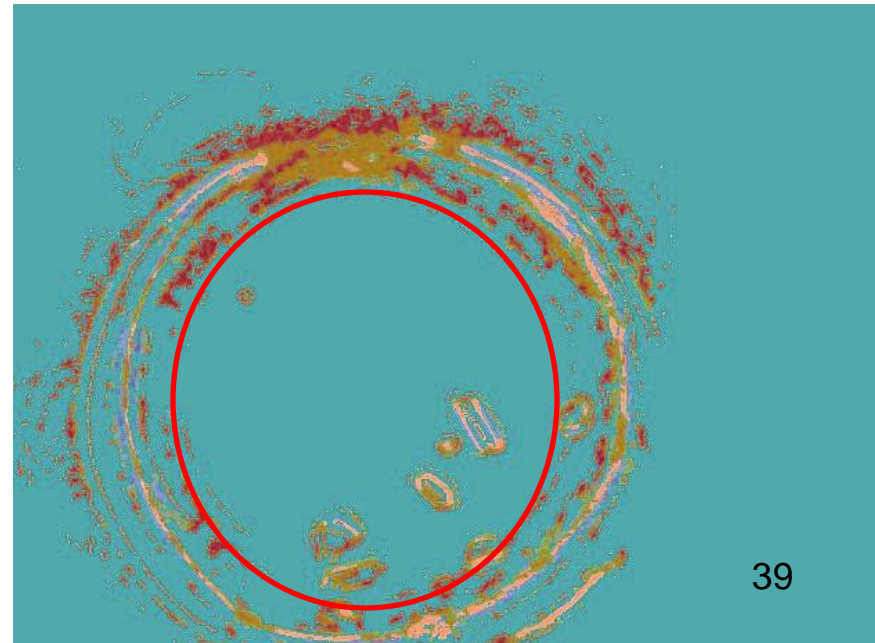


Application to Protein Crystal Images

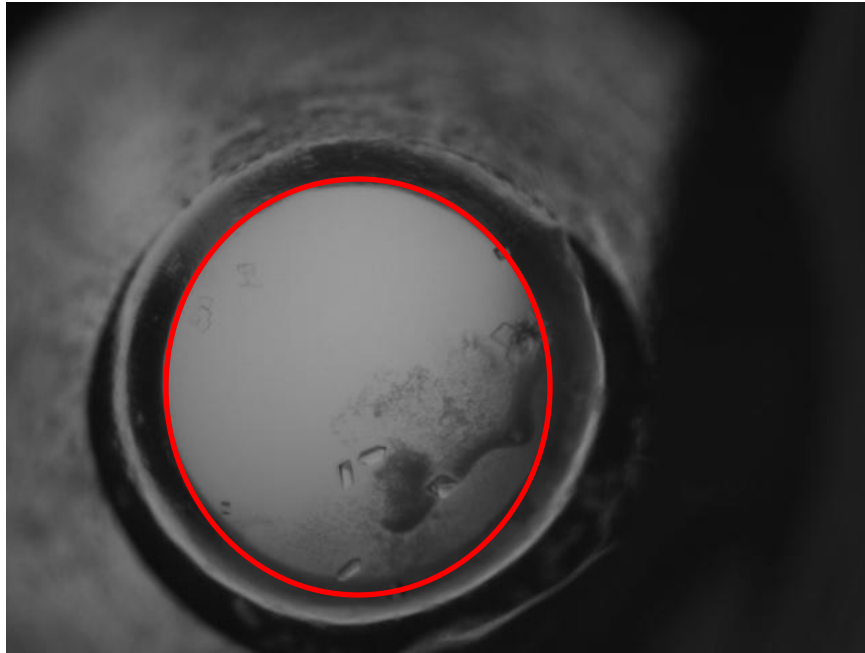

Original image in PGM (Portable Gray Map) format

- K-mean clustering result (number of clusters is equal to 10 and similarity measure is Euclidean distance)
- Different colors represent different textures

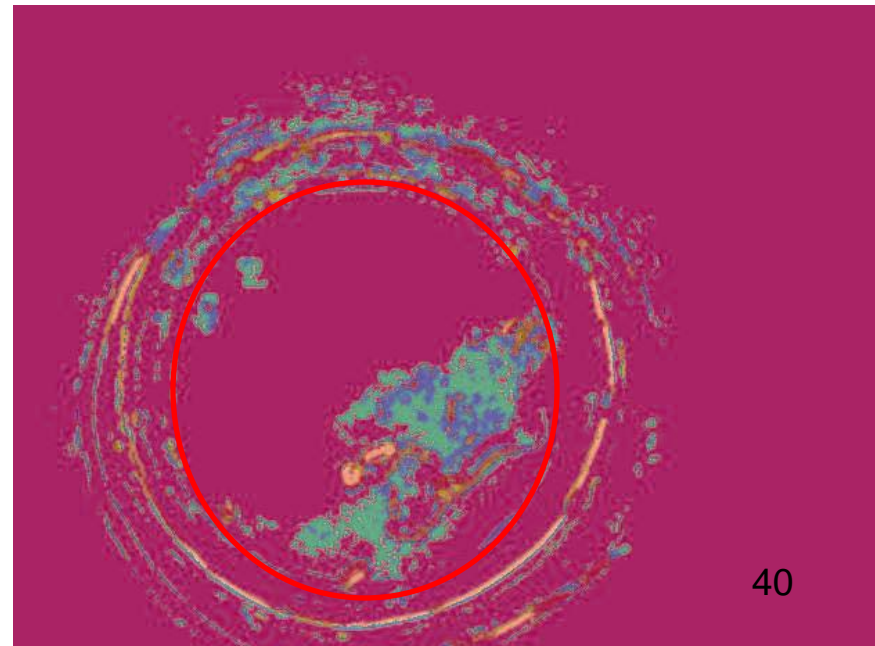

References

- Chad Carson, Serge Belongie, Hayit Greenspan, and Jitendra Malik. "Blobworld: Image Segmentation Using Expectation-Maximization and Its Application to Image Querying." IEEE Transactions on Pattern Analysis and Machine Intelligence 2002; Vol 24. pp. 1026-38.
- W. Forstner, "A Framework for Low Level Feature Extraction," Proc. European Conf. Computer Vision, pp. 383-394, 1994.