

# CSE/EE 461 – Module 15

## Security

---

### This Time

---

- Network security
- Focus
  - How do we secure distributed systems?
- Topics
  - Privacy, integrity, authenticity
  - Cryptography
  - Practical security

Application
Presentation
Session
Transport
Network
Data Link
Physical

## Preliminaries: End-Host Security

---

- Traditional security concepts:
  - Integrity
    - My files shouldn't be modifiable by an unauthorized user
  - Privacy
    - My files shouldn't be readable by an unauthorized user
- Traditional security mechanisms:
  - Authentication
    - Who are you?
  - Authorization
    - What are you allowed to do?

## Preliminaries (cont.)

---

- “Trusted computing base”
  - Components of the system that you believe are respecting the security policy but that are not verified as doing so
    - The user trusts the operating system
      - E.g., won't leak your files to unauthorized users, won't spuriously delete/modify them
- User trusts applications
  - Emacs isn't mailing your file to its authors
- User trusts the hardware
  - Is your keyboard trustworthy?
  - Is an ATM trustworthy?
- Does the OS trust users?
  - Mandatory access control

## Preliminaries: Network Security

---

- Most of the technologies in lower protocols layers was developed pre-Internet
- Pre-Internet:
  - There weren't many network services (telnet, mail, ftp, a few others)
  - There weren't many machines on networks
    - Many local networks, but not very interconnected
  - “End-to-end security” made sense
    - Trusted OSes running trusted applications run by trusted users
      - At the very least, you could probably track down a malicious user
- Result: no security mechanisms were built into protocols themselves
  - E.g., mail spoofing was trivial

## Preliminaries: Post-Internet

---

- Really an entirely new situation
  - Servers want “anonymous” users
  - Users want to talk with unverified servers
  - Users want to run unverified code
- Possible approaches:
  - Verification of identity + trust
    - X.509 certificates
  - Enforcement
    - Java security model

## Network Security

---

- What properties would we like the network to offer?
  - Privacy: messages can't be eavesdropped
  - Integrity: messages can't be tampered with
  - Authenticity: we can verify who created the message
  - Recency: we can verify that the packet was sent not too long ago
  - Availability: I can send and receive the packets I want
  - Non-repudiation: you can't claim you didn't say something you did
  
  - Anonymity: not only can't you tell what the content of my conversation is, you can't even tell who I'm talking with
- There are other properties we would like from the distributed services that run on top, as well
  - E.g., if I send you my medical records, you can't send them to anyone else

CSE/EE 461, Autumn 2006

M15.7

## Achieving Security

---

- It's not about making security violations impossible, it's about making them too expensive to be worth it to the attacker
  - Example: There's a simple method to break passwords: try them all
- Security is a negative goal
  - Proof that something can't be done within some cost model is often followed by demonstration that it can be done by stepping outside the model
    - Example: dictionary attacks  
(Goal isn't "break into account gwb" it's "break into any account")
- There is a long-standing debate about the roles of prevention and retaliation
  - Steel plates over your doors and windows or deadbolts and the legal system?

CSE/EE 461, Autumn 2006

M15.8

## Attack Models

---




- eavesdropper
- man-in-the-middle
- replay attack
- spoof
- phish
- ...

## Basic Tool: Cryptography

---

- Cryptography (encryption) directly addresses the eavesdropper problem
- It turns out it can also be used to address some of the other problems
  - E.g., authenticity
- Encryption is a building block
  - A *security protocol* is needed to achieve some more complex goal

## Basic Encryption for Privacy

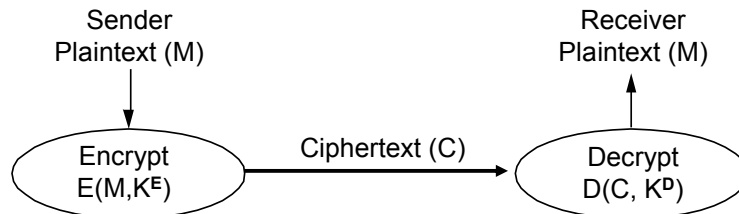

- Cryptographer chooses functions E, D and keys  $K^E, K^D$ 
  - Mathematical basis
- Cryptanalyst try to “break” the system
  - Depends on what is known: E and D, M and C?

CSE/EE 461, Autumn 2006

M15.11

## Secret Key Functions (DES, IDEA)



- Also called “shared secret”
- Single key (symmetric) is shared between parties
  - Used both for encryption and decryption
- Pro’s:
  - Fast; hard to break given just ciphertext
- Con’s:
  - key distribution problem
    - Suppose you want to create an account at [youtube.com](http://youtube.com)?
- The key distribution problem is crippling
  - Every client must share a (distinct!) secret with every server

CSE/EE 461, Autumn 2006

M15.12

## Public Key Functions (RSA)

---



- Public key can be published; private is a secret
  - Still have a key distribution problem, though...

CSE/EE 461, Autumn 2006

M15.13

## Properties of Public Key Encryption

---

- Let  $K^1$  be the private key, and  $K^*$  be the public key
- $D(E(M, K^*), K^1) = M = D(E(M, K^1), K^*)$
- Implications
  - Anonymous client can send private message to server knowing only  $K^*$
  - Server can prove authenticity by encrypting with  $K^P$

CSE/EE 461, Autumn 2006

M15.14

## RSA Digital Signature

---



- Notice that we reversed the role of the keys. Now only one party can send the message but anyone can check it's authenticity

CSE/EE 461, Autumn 2006

M15.15

## A Faster "RSA Signature"

---

- Encryption can be expensive, e.g., RSA measured in Kbps
- To speed up, let's sign just the checksum instead!
  - Check that the encrypted bit is a signature of the checksum
- Problem: Easy to alter data without altering checksum
- Answer: Cryptographically strong "checksums" called message digests where it's computationally difficult to choose data with a given checksum
  - But they still run much more quickly than encryption
  - SHA1 is the most common example


CSE/EE 461, Autumn 2006

M15.16



## Message Digests (MD5, SHA)

- Act as a cryptographic checksum or hash
  - Typically small compared to message (MD5 128 bits)
  - “One-way”: infeasible to find two messages with same digest

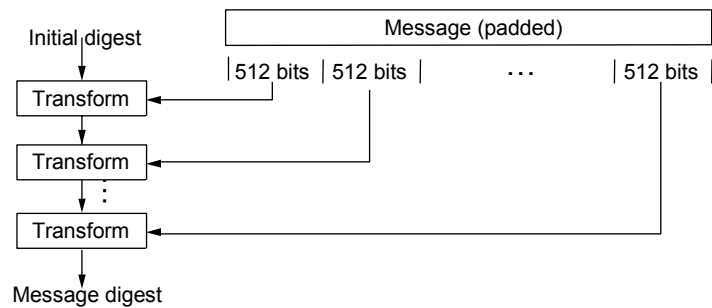

CSE/EE 461, Autumn 2006

M15.17

## Message Integrity / Authenticity


- Sender:
  - computes cryptographic hash of message M
  - encrypts the hash with its own private key
  - Sends both M and the encrypted hash
- Receiver:
  - Accepts M and the encrypted hash
  - Applies the sender's public key to decrypt the hash
  - Computes the hash on M and compares it to the decrypted value

CSE/EE 461, Autumn 2006

M15.18

## Security Protocols: Authentication w/ Shared Secret


- Three-way handshake for mutual authentication
  - Client and server share secrets, e.g., login password

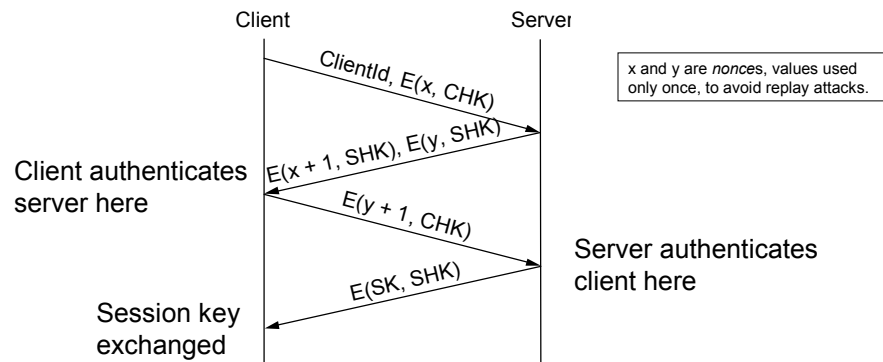

CSE/EE 461, Autumn 2006

M15.19


## Via Trusted Third Party (Kerberos)

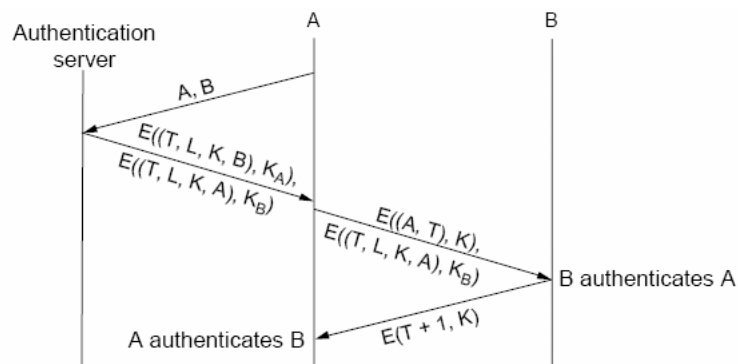

CSE/EE 461, Autumn 2006

M15.20

## Public Key Authentication

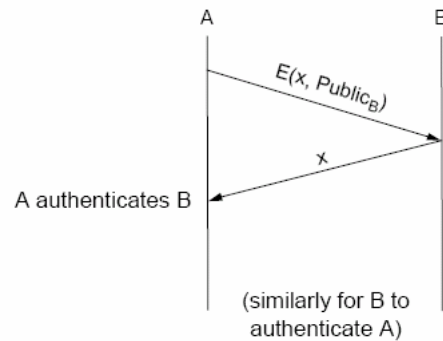


CSE/EE 461, Autumn 2006

M15.21

## Diffie-Hellman Key Exchange

- Problem: agree on a session key with no prior information exchanged

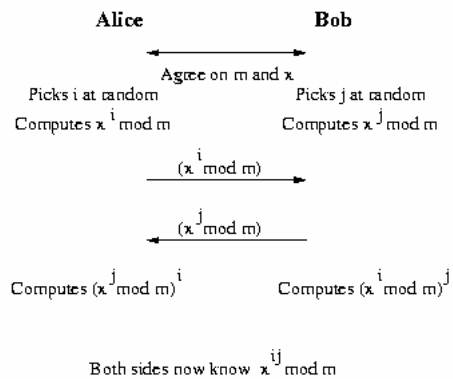

CSE/EE 461, Autumn 2006


M15.22

# ssh

---

- Encrypted channel
  - Diffie-Hellman key exchange (plus negotiated encryption scheme)
- Authentication
  - Client has private key on local machine (usually in `~/.ssh/id_rsa`) and public key on remote machine (in `~/.ssh/authorized_keys`)
  - Server sends a challenge for client to sign using private key
  - Server verifies challenge using public key

# X.509 Certificates

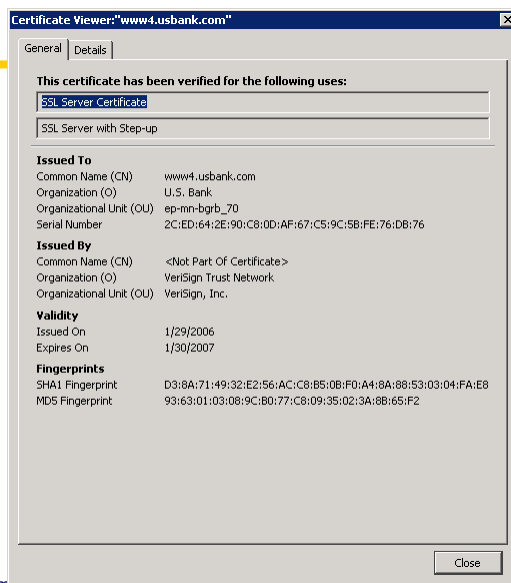

## Security in Context

---

- A system is only as secure as its weakest link
- Often that weakest link is you!
- Example: You're a registered user with, say, 25 online services. How many different passwords do you have?
  - Want “single sign-on”
  - Need either:
    - A client-side password manager, or
    - A central, trusted authority *a la* Kerberos (Microsoft Passport, Google Checkout)

## Social engineering

---

- Con person into giving out information
- Phone secretary, say:
  - “Hi. I'm your company's IT administrator. Your boss is currently traveling, and I can't reach them. I need their password to verify their account hasn't been broken into. This is really urgent.”
- Somebody phones you, and says:
  - “Hi. I'm with the Bank of America credit card fraud division. We've detected suspicious activity on your account, and we want to ensure you haven't become a victim of identity theft. Before we start, I need to verify your identity. What is your bank account number? SSN?”
- Often far more effective than technical attack
  - requires all people with access to sensitive information to be conscious of security issues

## Patricia Dunn: I Am Innocent

PALO ALTO, Calif., Oct. 8, 2006

**(CBS)** The Hewlett-Packard board of directors was a leaky ship. Secret board deliberations were ending up in the press left and right, and it was decided something had to be done.

That something is arguably the most famous leak investigation since Watergate, and because of it Pattie Dunn, who was chairman of the HP board of directors, now faces criminal charges, and could go to jail.

As **correspondent Lesley Stahl** reports, the charges stem from the use of something called pretexting, where phone records are retrieved by subterfuge and pretense – where someone calls the phone company and pretends to be someone else in order to obtain the records.

The tactic was apparently used to retrieve the phone records not only of HP board members but of reporters as well. Social security numbers were also obtained, board members and journalists were followed, and there was even discussion of planting spies in newsrooms.

On Thursday, Pattie Dunn was booked on four felony counts in connection with the investigation.

## Microsoft Security Bulletin MS01-017

Erroneous VeriSign-Issued Digital Certificates Pose Spoofing Hazard

**Originally posted:** March 22, 2001

**Updated:** June 23, 2003

### Summary

**Who should read this bulletin:**

All customers using Microsoft® products.

### Impact of vulnerability:

Attacker could digitally sign code using the name "Microsoft Corporation".

### Recommendation:

All customers should install the update discussed below.

### Technical description:

In mid-March 2001, VeriSign, Inc., advised Microsoft that on January 29 and 30, 2001, it issued two VeriSign Class 3 code-signing digital certificates to an individual who fraudulently claimed to be a Microsoft employee. The common name assigned to both certificates is "Microsoft Corporation". The ability to sign executable content using keys that purport to belong to Microsoft would clearly be advantageous to an attacker who wished to convince users to allow the content to run.

The certificates could be used to sign programs, ActiveX controls, Office macros, and other executable content. Of these, signed ActiveX controls and Office macros would pose the greatest risk, because the attack scenarios involving them would be the most straightforward. Both ActiveX controls and Word documents can be delivered via either web pages or HTML mails. ActiveX controls can be automatically invoked via script, and Word documents can be automatically opened via script unless the user has applied the [Office Document Open Confirmation Tool](#).

United States Microsoft.com Home

**Microsoft** Search Microsoft.c

Help and Support

Help and Support Home  Select a Product  Search Knowledge Base

## Update Available to Revoke Fraudulent Microsoft Certificates Issued by VeriSign

[View products that this article applies to.](#)

This article was previously published under Q293811

Article ID : 293811  
 Last Review : October 27, 2006  
 Revision : 3.3

**On This Page**

- ↓ [SUMMARY](#)
- ↓ [Important Notes](#)
- ↓ [MORE INFORMATION](#)

**SUMMARY**

In March, 2001, VeriSign, Inc. announced that it had issued two digital certificates to an individual who fraudulently claimed to be a Microsoft employee. This issue is discussed at length in Microsoft Security Bulletin [MS01-017](#). VeriSign has revoked these certificates, and they are listed in the current VeriSign Certificate Revocation List (CRL). However, because the VeriSign code-signing certificates do not specify a CRL Distribution Point (CDP), it is not possible for any browser's CRL-checking mechanism to locate and use the VeriSign CRL. Microsoft has developed an update that rectifies this problem. The update package includes a CRL that contains the two certificates, and an installable revocation handler that consults the CRL on the local computer, rather than attempting to use the CDP mechanism.

CSE/EE 461, Autumn 2006 M15.29

## What is Denial of Service?

---

- Attacker can deny service to legitimate users if they can overwhelm the system providing the service
  - System is full of bugs ... just send it packets that trigger them
  - System has limited bandwidth, CPU, memory, etc. ... just sent it too many packets to handle
- Big issue in practice and lack of effective solutions
  - Today, patch as found (CERT) or build implementation to tolerate DOS
  - Tomorrow, design protocols to withstand, possibly network support for shutting down attack?
- Two broad classes:
  - Nasty packets trigger implementation bugs, e.g., Ping of Death
  - Packet floods target bandwidth, CPU, memory, e.g., SYN flood

CSE/EE 461, Autumn 2006 M15.30

## Complication: Spoofed Addresses

---

- Why reveal your real address? Instead, “spoof” it.
  - Can implicate others and appear to be many hosts
- Solution?
  - Ingress filtering (ISPs check validity of source addresses) helps, but has poor incentive patterns and is not a complete solution
- Opportunity: “backscatter analysis”
  - host responds to spoofed packet, sends response packet to essentially random IP
  - if you have a large number of unused IPs, just listen and you’ll hear the backscatter -- can measure DOS attacks!


CSE/EE 461, Autumn 2006

M15.31

## Distributed DOS (DDOS)

---

- Use automated tools to set up a network of zombies
  - Trin00, TFN, mstream, Stacheldraht, ...

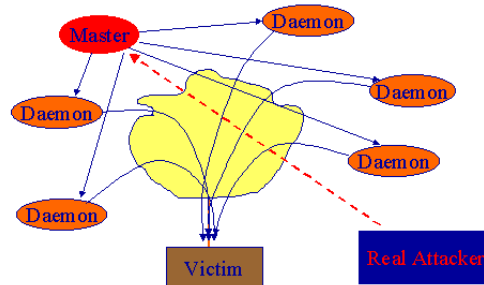

CSE/EE 461, Autumn 2006

M15.32



## Lessons

---

- Encryption is powerful tool
  - strong mathematical properties
  - used to provide integrity, authenticity, privacy
  - must be used correctly
- Many other security issues in practice
  - non-mathematical, “best practice” based
  - easy to get wrong
- In the end, people are the weak link
  - social engineering