

CSE 143

Lecture 12

Maps and Grammars

slides created by Marty Stepp
<http://www.cs.washington.edu/143/>

Exercise


- Write a program to count the occurrences of each word in a text file (e.g. *Moby Dick* or *Green Eggs and Ham*).
 - Allow the user to type a word and report how many times that word appeared in the book.
 - Report all words that appeared in the book at least 500 times, in alphabetical order.
- How will we store the data to solve this problem?

The Map ADT

- **map**: Holds a set of unique *keys* and a collection of *values*, where each key is associated with one value.
 - a.k.a. "dictionary", "associative array", "hash"

- basic map operations:

- **put**(*key*, *value*): Adds a mapping from a key to a value.
- **get**(*key*): Retrieves the value mapped to the key.
- **remove**(*key*): Removes the given key and its reference to the mapped value.

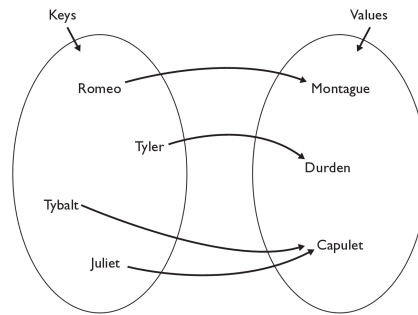

myMap.get("Juliet") returns "Capulet"

3

Maps and tallying

- a map can be thought of as generalization of a tallying array
 - the "index" (key) doesn't have to be an `int`
- recall previous tallying examples from CSE 142


– count digits: 22092310907

index	0	1	2	3	4	5	6	7	8	9
value	3	1	3	0	0	0	0	1	0	2

// (M)cCain, (O)bama, (I)ndependent

– count votes: "MOOOOOOMMMMMOOOOOO M O M M M I M O M M M I O"

key	"M"	"O"	"I"
value	16	14	3



4

Map implementation

- in Java, maps are represented by `Map` interface in `java.util`
- `Map` is implemented by the `HashMap` and `TreeMap` classes
 - `HashMap`: implemented using an array called a "hash table"; extremely fast: **$O(1)$** ; keys are stored in unpredictable order
 - `TreeMap`: implemented as a linked "binary tree" structure; very fast: **$O(\log N)$** ; keys are stored in sorted order
 - A map requires 2 type parameters: one for keys, one for values.

```
// maps from String keys to Integer values
Map<String, Integer> votes = new HashMap<String, Integer>();
```

5


Map methods

<code>put (key, value)</code>	adds a mapping from the given key to the given value; if the key already exists, replaces its value with the given one
<code>get (key)</code>	returns the value mapped to the given key (<code>null</code> if not found)
<code>containsKey (key)</code>	returns <code>true</code> if the map contains a mapping for the given key
<code>remove (key)</code>	removes any existing mapping for the given key
<code>clear()</code>	removes all key/value pairs from the map
<code>size()</code>	returns the number of key/value pairs in the map
<code>isEmpty()</code>	returns <code>true</code> if the map's size is 0
<code>toString()</code>	returns a string such as "{a=90, d=60, c=70}"
<code>keySet()</code>	returns a set of all keys in the map
<code>values()</code>	returns a collection of all values in the map
<code>putAll (map)</code>	adds all key/value pairs from the given map to this map
<code>equals (map)</code>	returns <code>true</code> if given map has the same mappings as this one


6

Using maps

- A map allows you to get from one half of a pair to the other.
 - Remembers one piece of information about every index (key).



- Later, we can supply only the key and get back the related value:
Allows us to ask: *What is Marty's phone number?*



7

Exercise solution

```
// read file into a map of [word --> number of occurrences]
Map<String, Integer> wordCount = new HashMap<String, Integer>();
Scanner input = new Scanner(new File("mobydick.txt"));
input.useDelimiter("[^a-zA-Z']+");
while (input.hasNext()) {
    String word = input.next().toLowerCase();
    if (wordCount.containsKey(word)) {
        // seen this word before; increase count by 1
        int count = wordCount.get(word);
        wordCount.put(word, count + 1);
    } else {
        // never seen this word before
        wordCount.put(word, 1);
    }
}

Scanner console = new Scanner(System.in);
System.out.print("Word to search for? ");
String word = console.next().toLowerCase();
System.out.println("appears " + wordCount.get(word) + " times.");
```

8

keySet and values

- `keySet` method returns a set of all keys in the map
 - can loop over the keys in a `foreach` loop
 - can get each key's associated value by calling `get` on the map

```
Map<String, Integer> ages = new HashMap<String, Integer>();
ages.put("Marty", 19);
ages.put("Geneva", 2);
ages.put("Vicki", 57);
for (String name : ages.keySet()) {
    int age = ages.get(name);
    System.out.println(name + " -> " + age);
}
```

// Geneva -> 2
// Marty -> 19
// Vicki -> 57

- `values` method returns a collection of all values in the map
 - can loop over the values in a `foreach` loop
 - there is no easy way to get from a value to its associated key(s)

9

Languages and Grammars

Languages and grammars

- (formal) **language**: A set of words or symbols.
- **grammar**: A description of a language that describes which sequences of symbols are allowed in that language.
 - describes language *syntax* (rules) but not *semantics* (meaning)
 - can be used to generate strings from a language, or to determine whether a given string belongs to a given language

11

Backus-Naur (BNF)

- **Backus-Naur Form (BNF)**: A syntax for describing language grammars in terms of transformation *rules*, of the form:

<symbol> ::= **<expression>** | **<expression>** ... | **<expression>**

- **terminal**: A fundamental symbol of the language.
- **non-terminal**: A high-level symbol describing language syntax, which can be transformed into other non-terminal or terminal symbol(s) based on the rules of the grammar.
- Java grammar
 - http://java.sun.com/docs/books/jls/second_edition/html/syntax.doc.html

12

An example BNF grammar

```
<s>::=<n> <v>  
<n>::=Marty | Victoria | Stuart | Jessica  
<v>::=cried | slept | belched
```

- Some sentences that could be generated from this grammar:

```
Marty slept  
Jessica belched  
Stuart cried
```

13

BNF grammar version 2

```
<s>::=<np> <v>  
<np>::=<pn> | <dp> <n>  
<pn>::=Marty | Victoria | Stuart | Jessica  
<dp>::=a | the  
<n>::=ball | hamster | carrot | computer  
<v>::=cried | slept | belched
```

- Some sentences that could be generated from this grammar:

```
the carrot cried  
Jessica belched  
a computer slept
```

14

BNF grammar version 3

```
<s>::=<np> <v>
<np>::=<pn> | <dp> <adj> <n>
<pn>::=Marty | Victoria | Stuart | Jessica
<dp>::=a | the
<adj>::=silly | invisible | loud | romantic
<n>::=ball | hamster | carrot | computer
<v>::=cried | slept | belched
```

- Some sentences that could be generated from this grammar:

```
the invisible carrot cried
Jessica belched
a computer slept
a romantic ball belched
```

15

Grammars and recursion

```
<s>::=<np> <v>
<np>::=<pn> | <dp> <adjp> <n>
<pn>::=Marty | Victoria | Stuart | Jessica
<dp>::=a | the
<adjp>::=<adj> <adjp> | <adj>
<adj>::=silly | invisible | loud | romantic
<n>::=ball | hamster | carrot | computer
<v>::=cried | slept | belched
```

- Grammar rules can be defined *recursively*, so that the expansion of a symbol can contain that same symbol.
 - There must also be expressions that expand the symbol into something non-recursive, so that the recursion eventually ends.

16

Grammar, final version


```

<s> ::= <np> <vp>
<np> ::= <dp> <adjp> <n> | <pn>
<dp> ::= the | a
<adjp> ::= <adj> | <adj> <adjp>
<adj> ::= big | fat | green | wonderful | faulty | subliminal
<n> ::= dog | cat | man | university | father | mother | child
<pn> ::= John | Jane | Sally | Spot | Fred | Elmo
<vp> ::= <tv> <np> | <iv>
<tv> ::= hit | honored | kissed | helped
<iv> ::= died | collapsed | laughed | wept
    
```

- Could this grammar generate the following sentences?
 Fred honored the green wonderful child
 big Jane wept the fat man fat
- Generate a random sentence using this grammar.

17

Sentence generation

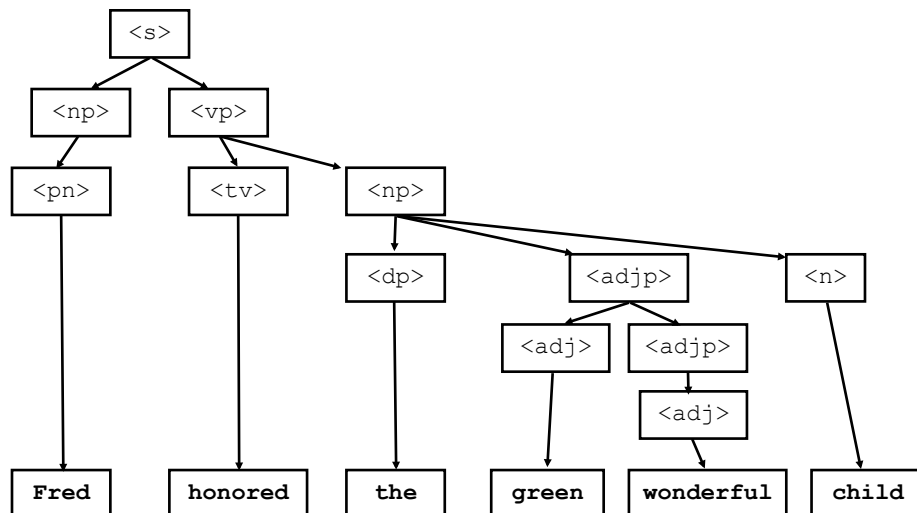

18