

# Document Object Model (DOM)


CSE 190 M (Web Programming), Spring 2007  
University of Washington

References: [Forbes/Steele](#), [Chipman](#) (much of this content was stolen from them)



## Recall: Document Object Model (DOM)

- a representation of the current web page as a tree of Javascript objects
- allows you to view/modify page elements in script code after page has loaded
  - client side = highly responsive interactions
  - browser-independent
  - allows progressive enhancement of pages
- also used for **XML parsing**, which we'll do soon

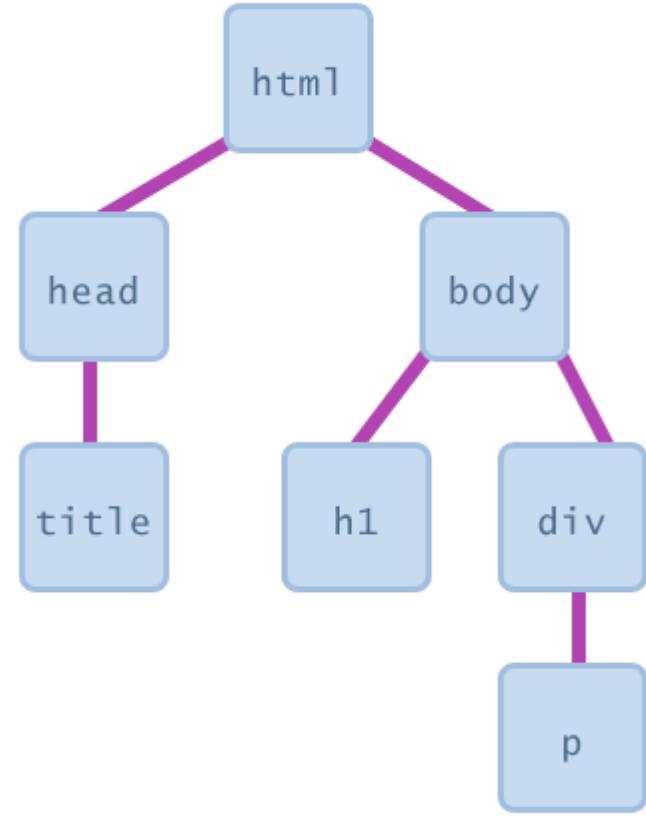


---

# An example XHTML page

```
<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Strict//EN"
"http://www.w3.org/TR/XHTML1/DTD/XHTML1-strict.dtd">
<html xmlns="http://www.w3.org/1999/xhtml" xml:lang="en" lang="en">
<head>
<title>Page Title</title>
<meta http-equiv="content-type" content="text/html; charset=utf-8" />
<meta http-equiv="Content-Language" content="en-us" />
</head>
<body>
<h1>This is a heading</h1>
<p>A paragraph with a <a href="http://www.google.com/">link</a>.</p>
<ul>
<li>a list item</li>
<li>another list item</li>
<li>a third list item</li>
</ul>
</body>
</html>
```

---


## The resulting DOM tree

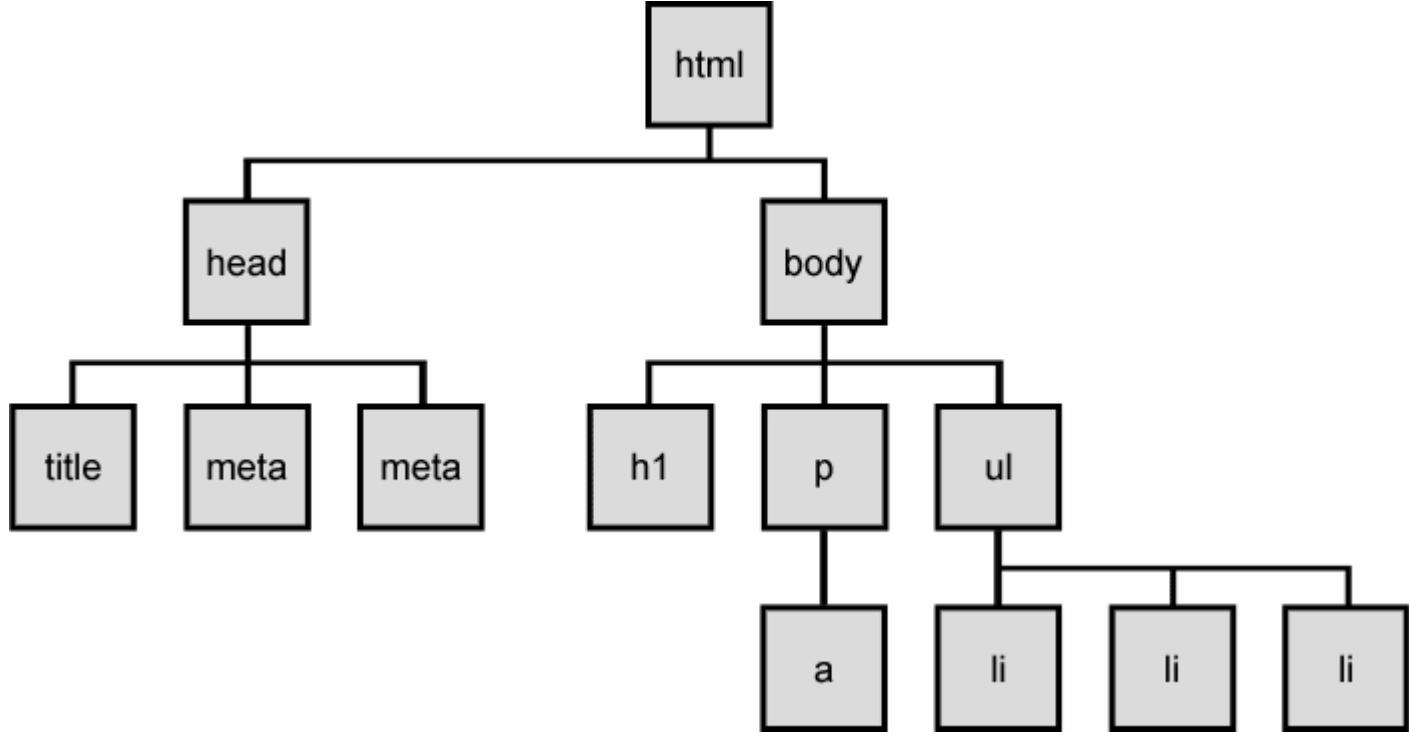

# Types of nodes

```
<p>This is a paragraph of text with a  
<a href="/path/to/another/page.html">link</a> inside.
```

-  **element nodes**  
(HTML tag)
  - can have children and/or attributes
-  **text nodes** (text in a block element)
  - a child within an element node
  - cannot have children or attributes
-  **attribute nodes**  
(attribute/value pair inside the start of a tag)
  - a child within an element node
  - cannot have children or attributes

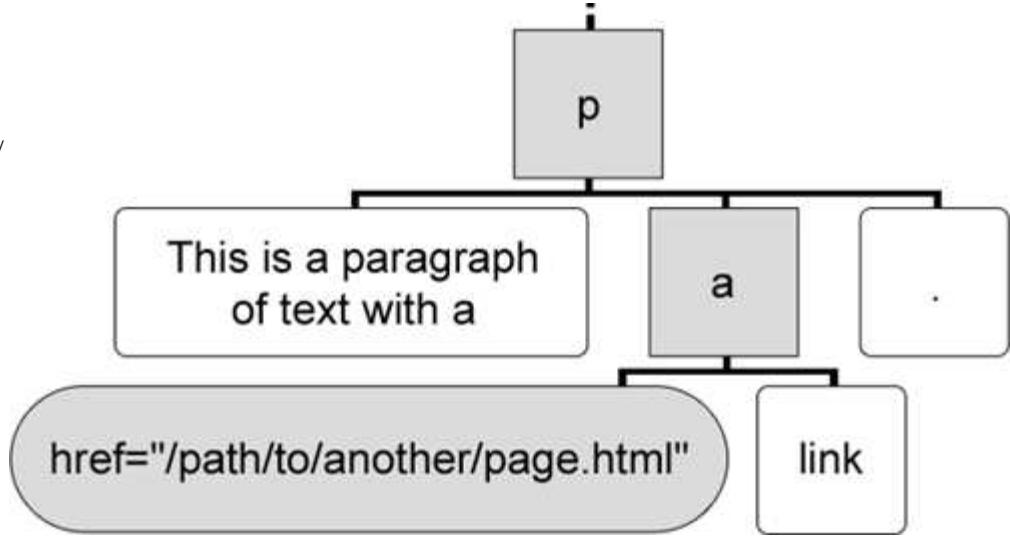


# Traversing the DOM tree

every node's DOM object has the following properties:

- `firstChild, lastChild` : start/end of this node's list of children
- `childNodes` : array of all this node's children
- `nextSibling, previousSibling` : neighboring nodes that have the same parent
- `parentNode` : the element that contains this node
- [complete list of DOM node properties](#)
- [browser incompatiblity information \(IE6 sucks\)](#)

# DOM tree traversal example

```
<p id="foo">This is a paragraph of text with a
<a href="/path/to/another/page.html">link</a> inside.
```

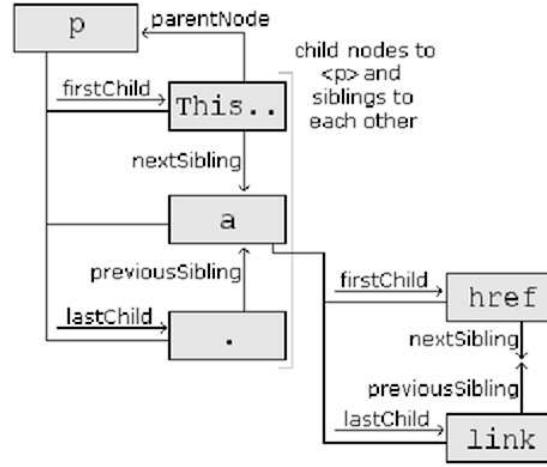

- How would we change the word "link" in the above HTML to be "bunny"?

## Modifying the DOM tree

Every DOM node object has these methods:

- `appendChild(node)` : places the given node at the end of this node's child list
- `insertBefore(newChild, oldChild)` : places the given new node in this node's child list just before `oldChild`
- `removeChild(node)` : removes the given node from this node's child list
- `replaceChild(newChild, oldChild)` : replaces the given child node with the given new node

## Creating new nodes: `createElement`

```
// create a new <h2> node
var newHeading = document.createElement( "h2" );
newHeading.style.color = "green";
newHeading.innerHTML = "This is a heading";

// put it onto the page in the div with id "content"
var contentArea = document.getElementById("content");
contentArea.appendChild(newHeading);
```

- `document.createElement("tag")` constructs a new empty DOM node representing an element of that type
- this node's properties can be set just like any other DOM node's
- once appropriate properties are set, the node can be added to the page

---

## Modifying tree example

```
// in window.onload event handler,  
document.getElementById("thisslide").onclick = slideClick;  
  
function slideClick() {  
    var p = document.createElement("p");  
    p.innerHTML = "A paragraph!";  
    this.appendChild(p);  
}
```

---

## DOM versus innerHTML

Why not just code the previous example this way?

```
// equivalent to previous slide, but worse style  
function slideClick() {  
    this.innerHTML += "<p>A paragraph!</p>";  
}
```

---

## Ugly innerHTML code

Imagine that the new node is more complex:

```
function slideClick() {  
    this.innerHTML += "<p style='color: red; " +  
        "margin-left: 50px;' " +  
        "onclick='myOnClick();'>" +  
        "A paragraph!</p>";  
}
```

- ugly as hell
- must carefully distinguish " and '
- bad style on many levels (style *and* JS code embedded within HTML)
- can only add at beginning or end, not in middle of child list


# Benefits of DOM over innerHTML

```
function slideClick() {  
    var p = document.createElement("p");  
    p.style.color = "red";  
    p.style.marginLeft = "50px";  
    p.onclick = myOnClick;  
    p.innerHTML = "A paragraph!"; // here innerHTML is okay  
    this.appendChild(p);  
}
```

- cleaner to attach event handlers to DOM object
- cleaner to set styles on DOM object
- still okay to use `innerHTML` if a node's inner contents are trivial

## Practice problem: Rectangles

Click a rectangle to move it to the front. Shift-click a rectangle to delete it.

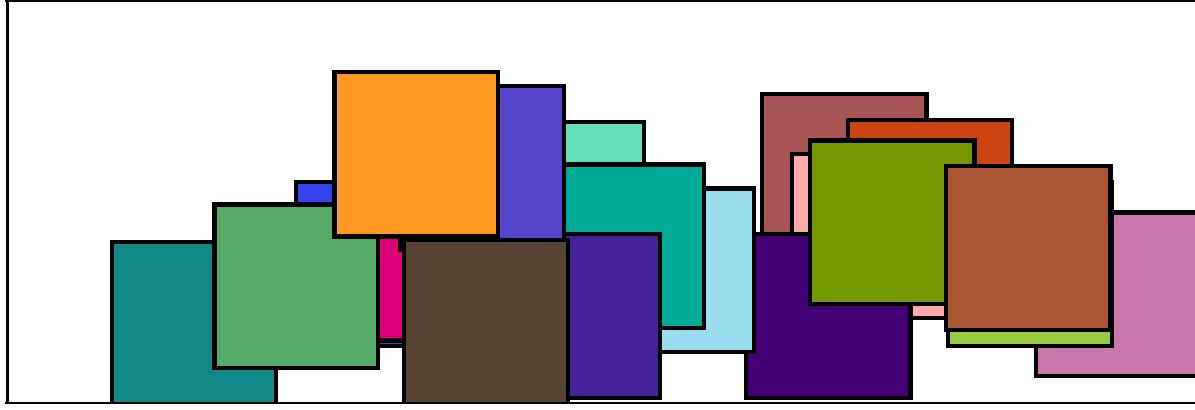

- Write Javascript code to create and manipulate random rectangles ([HTML](#), [CSS](#), [JS](#)).
- Hint: See absolute and relative positioning from the layout slides.
- Hint: Use `z-index` property to adjust which rectangles are on top.

## ----- More DOM -----

### More DOM features

---

## Accessing nodes by id or tag

```
document.getElementById("id")
```

- gets a specific element on the page

```
element.getElementsByTagName("tag")
```

- get an array of all children of the given type ("p", "div", etc.)
- can be called on the overall document or on a specific node

---

## Getting all elements of a certain type

highlight all paragraphs in document

```
var allParas = document.getElementsByTagName("p");
for (var i = 0; i < allParas.length; i++) {
    allParas[i].style.backgroundColor = "yellow";
}
```

---

```
<body>
<p>This is the first paragraph</p>
<p>This is the second paragraph</p>
<p>You get the idea...</p>
</body>
```

---

## Combining with getElementById

highlight all paragraphs inside of the section with ID "footer"

```
var footer = document.getElementById("footer");
var footerParas = footer.getElementsByTagName("p");
for (var i = 0; i < footerParas.length; i++) {
    footerParas[i].style.backgroundColor = "yellow";
}
```

---

```
<p>This won't be returned!</p>
<div id="footer">
    <p>1234 Street</p>
    <p>Atlanta, GA</p>
</div>
```

---

# Global DOM objects

Every Javascript program can refer to the following global objects:

- window : the browser window
- navigator : info about the web browser you're using
- screen : info about the screen area occupied by the browser
- history : list of pages the user has visited
- location : URL of the current HTML page
- document : current HTML page object model

---

## The window object

- represents the entire browser window
- the top-level object in the DOM hierarchy
- technically, all global variables become part of the window object
- methods:
  - alert, blur, clearInterval, clearTimeout, close, confirm, focus, moveBy,  
moveTo, open, print, prompt, resizeBy, resizeTo, scrollBy, scrollTo,  
setInterval, setTimeout
- properties:
  - document, history, location, name

---

## The navigator object

- information about the web browser application
- properties:
  - appName, appVersion, browserLanguage, cookieEnabled, platform, userAgent
  - complete list

---

## The screen object

- information about the client's display screen
- properties:
  - availHeight, availWidth, colorDepth, height, pixelDepth, width
  - complete list

---

## The history object

- list of sites the browser has visited in this window
- properties:
  - length
- methods:
  - back, forward, go
- complete list

---

## The location object

- represents the URL of the current web page
- properties:
  - host, hostname, href, pathname, port, protocol, search
- methods:
  - assign, reload, replace
- complete list

---

## The document object

- represents the URL of the current web page
- properties:
  - anchors, body, cookie, domain, forms, images, links, referrer, title, URL
- methods:
  - close, getElementById, getElementsByName, getElementsByTagName, open,  
write, writeln
- complete list