

# CSE 303

## Concepts and Tools for Software Development

Magdalena Balazinska  
Winter 2007

Lecture 11 – Structs and Heap

# What We Have Seen So Far

## Introduction to C

- Structure of a C program
- Memory model of a process
- Pointers and the stack
  - Pointers to basic data types
  - Arrays and strings
  - Passing arguments to functions (including pointers)
- Formatted input and output
  - Writing formatted data to stdout, stderr, or a file
  - Reading formatted data from stdin or from a file

Tools: debugger

# Where We Are Going This Week

- Defining new data types
  - Structures in C
  - Converting between types: **typecasts**
- Dynamic memory management
  - The **heap**
  - **Building, maintaining, destroying** data structures
    - Example: lists, queues, trees

# Structure Definition

- A structure is a “collection of related variables under one name”

```
struct sensor_reading {  
    long timestamp;  
    char location[20];  
    int temperature;  
};
```

- The related variables can be of different types
- So a structure is basically a record
- Often a building block for more complex data structures: linked lists, trees, queues, etc.

# Structure Variables

- **Method 1 to declare structure variables**

```
struct sensor_reading v;  
struct sensor_reading a[2];  
struct sensor_reading *p;
```

- **Method 2 to declare structure variables**

```
struct sensor_reading {  
    long timestamp;  
    char location[20];  
    int temperature;  
} v, a[2], *p;
```

# Structure Variables

- Method 3 to declare structure variables

```
typedef struct sensor_reading Reading;  
Reading v, a[2], *p;
```

- Keyword `typedef` serves to define synonyms (aliases)

- Creating the structure and type in one statement

```
typedef struct {  
    long timestamp;  
    char location[20];  
    int temperature;  
} Reading;
```

# Using structs

## Initializing

```
Reading v = {1002, "EE037", 67};
```

## Accessing fields

```
v.timestamp = 1002;
```

```
Reading *p = &v;
```

```
(*p).timestamp = 1002;
```

```
Shorthand notation: p->timestamp = 1002;
```

Examples: `struct.c`, `struct-functions.c`

# Types in C

- There are an infinite number of types in C, but only a few ways to create them:
  - `char`, `int`, `double`, etc.
  - `void` (no data type, absence of data type)
  - `struct T`
  - arrays
  - `t*`, where `t` is a type
  - `union`, `enum` (not covered, read on your own)
  - function pointers (extra credit question on hw4)
  - `typedefs` (just expand to their definitions)



# Type Cast Operator

- Goal
  - Convert an expression from one type to another
- Syntax:  $(t)e$ 
  - Where  $t$  is a type and  $e$  is an expression

- Examples

```
int a=3; float b=4.3; long l=LONG_MAX;
printf("%d %f ", (int)b, (float)a);
printf("%ld %hu", l, (unsigned short)l);
```

- Output: 4 3.000000 2147483647 65535

# Casts Semantics

- Semantics depend on what you are casting
- Casting between numeric types
  - To **wider** type, get same value
  - To **narrower** type, may not (will get mod)
  - From floating point to integer (will round)
- Casts are **explicit conversions**
- There are also a lot of **implicit conversions**
  - Example: `int a = 3.0 * 1;`
  - Other example are arguments in function calls

# Casting Pointers


- If  $e$  has type  $t_1^*$ ,  $(t_2^*)e$  is a pointer cast
  - After casting, still pointing to the same location in memory
- Example

```
int array[10];
int *p1 = &array[1]; int *p2 = &array[2];
printf("%d ", p2 - p1); // Output: 1
printf("%d", (char*)p2 - (char*)p1); // Output: 4
```
- Note: compiler will let you do what you want without checking
- Casts are thus unsafe and can set your computer on fire
- Examples: `cast.c`

# Memory Management

- So far, space for all our variables was **allocated on the stack** (except for global variables)
- **Problems**
  - Space is **reclaimed** when allocating function returns
  - Variables have **fixed size**
- **What if would like to**
  - **Allocate space and keep it between function calls**
  - **Create data structures that grow & shrink with time**
- **Solution: need to use the heap**

# Address Space of a Unix Process

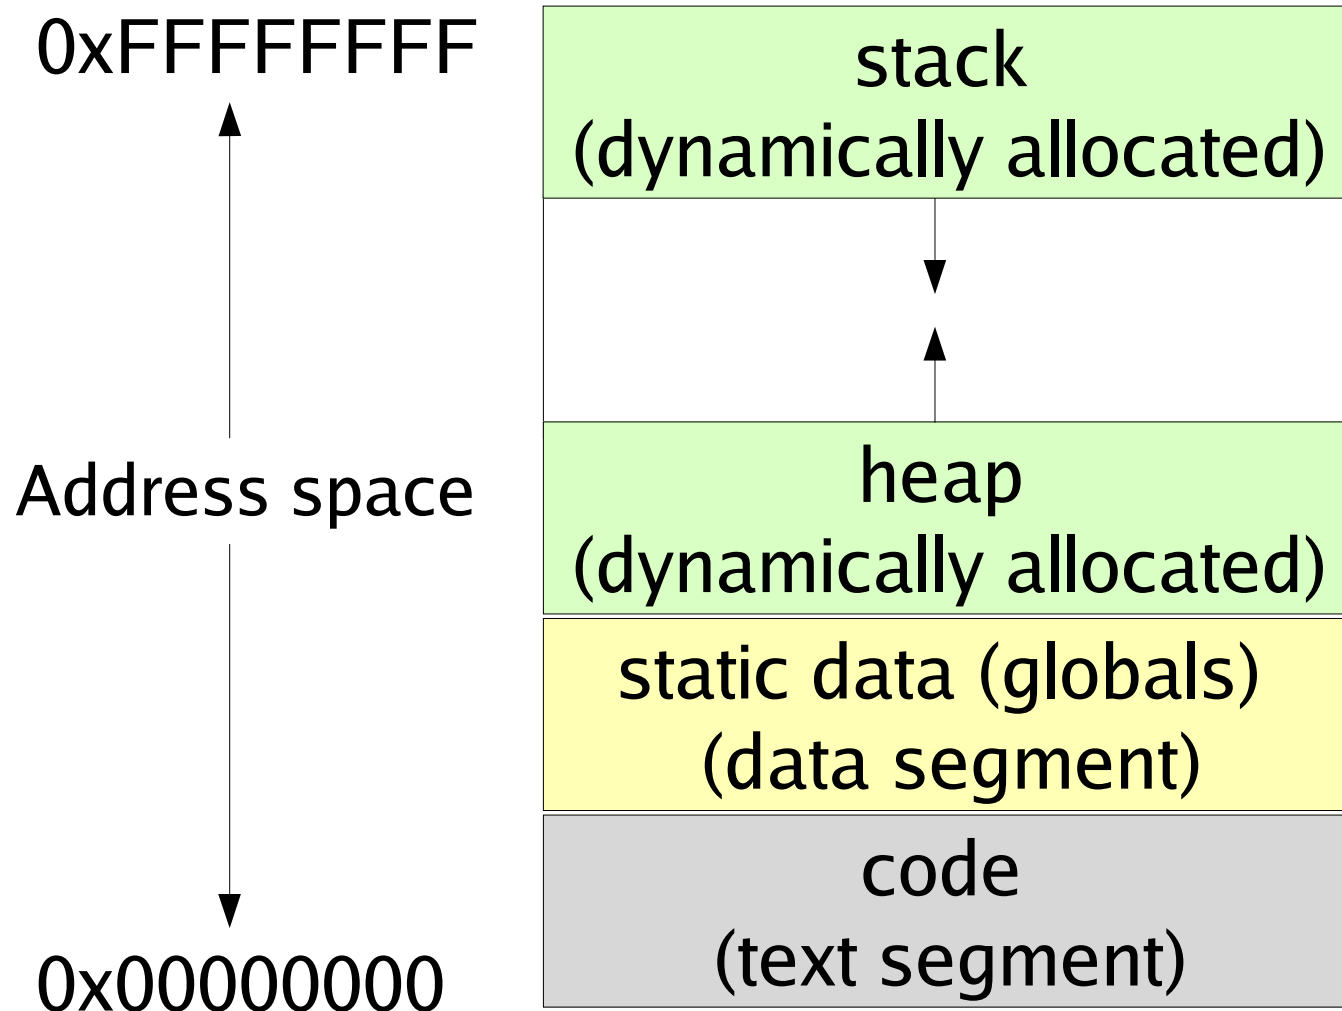

Address space is just array of 8-bit bytes

Typical total size is:  $2^{32}$

We will assume that integer is 4 bytes

A *pointer* is just an index into this array

# Dynamic Memory Management

```
void* malloc(size_t size);
```

- Allocates a chunk of memory on heap
- Returns pointer to chunk or NULL

```
free(void* ptr);
```

- De-allocates chunk of memory previously allocated with malloc
- Examples: `struct-dynamic.c`
- Note:
  - In Java `new C(...)` also uses the heap
  - Garbage collector takes care of freeing space

# Simple Example

```
// Allocate a chunk of memory
Reading *p = (Reading*)malloc(sizeof(Reading));

// Check if allocation succeeded
if ( !p ) { ... }

// Initialize and use allocated chunk of memory
pointer->ts = 10;
pointer->temp = 70;

// Free the chunk of memory
free(pointer);
pointer = NULL;
```

# Example 2: Growable Arrays

- Step 1: Dynamically-allocated array of size X

```
Reading *a=(Reading* )malloc(X*sizeof(Reading) );
```

- Step 2: Growing the array
  - Step 2.1 Allocate a new, larger array
  - Step 2.2 Copy all elements
  - Step 2.3 Deallocate old array
- Example `growing-array.c`
- Further reading: `calloc` and `realloc`



# Readings

- **Programming in C**
  - Chapter 9 “Working with Structures”
  - Chapter 14
    - Section on “Typedef Statement” (pp 325-327)
    - Section on “Data Type Conversions” (pp 327-330)
  - Chapter 17
    - Section on “Dynamic Memory Allocation” (pp 383-388)