

# CSE 333

## Lecture 6 - final C details

**Hal Perkins**

Department of Computer Science & Engineering

University of Washington





# Administrivia

New exercise posted today, due before class Wed.

- Then no exercises due until next week because...

HW1 due Thursday night

- How's it going? Questions??



# Agenda

## Today's topics:

- a few final C details
  - ▶ header guards and other preprocessor tricks
  - ▶ extern, static and visibility of symbols
  - ▶ some topics for you to research on your own



# an #include problem

What happens when we compile foo.c?

```
typedef void *LinkedList;  
  
// more declarations below
```

ll.h

```
#include "ll.h"
```

ht.h

```
typedef void *HashTable;  
  
// A hypothetical function  
LinkedList HTKeyList(HashTable t);
```

```
#include "ll.h"  
#include "ht.h"
```

```
int main(int argc,  
          char **argv) {  
    // ... do stuff here ...  
    return 0;  
}
```

foo.c



# an #include problem

What happens when we compile foo.c?

```
bash$ gcc -Wall -g -o foo foo.c
```


```
In file included from ht.h:1,  
                 from foo.c:2:
```

```
ll.h:1: error: redefinition of typedef 'LinkedList'
```

```
ll.h:1: note: previous declaration of 'LinkedList' was here
```

**foo.c** includes **ll.h** twice!

- 2nd time is indirectly via **ht.h**
- so, typedef shows up twice!
- *try using cpp to see this*

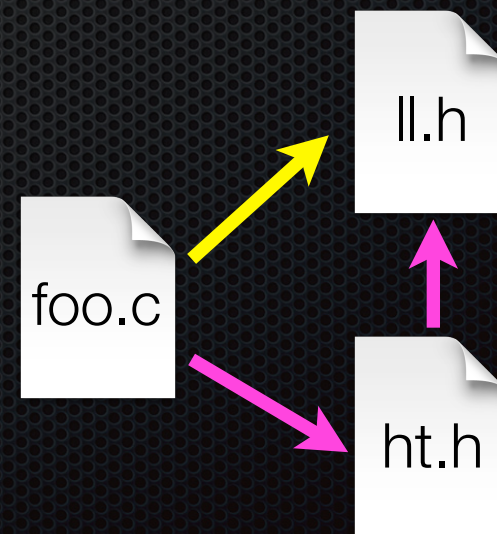



# header guards

A commonly used C preprocessor trick to deal with this

- uses macro definition (**#define**)
- uses conditional compilation (**#ifndef** and **#endif**)

```
#ifndef _LL_H_
#define _LL_H_

typedef void *LinkedList;

// more definitions below

#endif // _LL_H_
```

*ll.h*

```
#ifndef _HT_H_
#define _HT_H_

#include "ll.h"

typedef void *HashTable;

// A hypothetical function
LinkedList HTKeyList(HashTable t);

#endif // _HT_H_
```

*ht.h*



# Other preprocessor tricks

A way to deal with “magic constants”

```
int globalbuffer[1000];

void circalc(float rad,
             float *circumf,
             float *area) {
    *circumf = rad * 2.0 * 3.1415;
    *area = rad * 3.1415 * 3.1415;
}
```

bad code  
(littered with magic constants)

```
#define BUFSIZE 1000
#define PI 3.14159265359

int globalbuffer[BUFSIZE];

void circalc(float rad,
             float *circumf,
             float *area) {
    *circumf = rad * 2.0 * PI;
    *area = rad * PI * PI;
}
```

better code



# Macros

You can pass arguments to macros

```
#define ODD(x) ((x) % 2 != 0)

void foo(void) {
    if ( ODD(5) )
        printf("5 is odd!\n");
}
```

cpp →

```
void foo(void) {
    if ( ((5) % 2 != 0) )
        printf("5 is odd!\n");
}
```

Be careful of precedence issues; use parenthesis:

```
#define ODD(x) ((x) % 2 != 0)
#define BAD(x) x % 2 != 0

ODD(5 + 1);

BAD(5 + 1);
```

cpp →

```
((5 + 1) % 2 != 0);

5 + 1 % 2 != 0;
```



# Conditional Compilation

You can change what gets compiled

```
#ifdef TRACE
#define ENTER(f) printf("Entering %s\n", f);
#define EXIT(f) printf("Exiting %s\n", f);
#else
#define ENTER(f)
#define EXIT(f)
#endif

// print n
void pr(int n) {
    ENTER("pr");
    printf("n = %d\n", n);
    EXIT("pr");
}
```

*ifdef.c*



# Defining Symbols

Besides #defines in the code, preprocessor values can be given on the gcc command

```
bash$ gcc -Wall -g -DTRACE -o ifdef ifdef.c
```

assert is controlled the same way - #define NDEBUG and asserts expand to “empty” (it’s a macro - see assert.h)

```
bash$ gcc -Wall -g -DNDEBUG -o faster usesassert.c
```



# Namespace problem

If I define a global variable named “counter” in foo.c, is it visible in bar.c?

- if you use **external linkage**: yes
  - ▶ the name “**counter**” refers to the same variable in both files
  - ▶ the variable is defined in one file, declared in the other(s)
  - ▶ when the program is linked, the symbol resolves to one location
- if you use **internal linkage**: no
  - ▶ the name “**counter**” refers to different variables in each file
  - ▶ the variable must be defined in each file
  - ▶ when the program is linked, the symbols resolve to two locations



# External linkage

```
#include <stdio.h>

// A global variable, defined and
// initialized here in foo.c.
// It has external linkage by
// default.
int counter = 1;

int main(int argc, char **argv) {
    printf("%d\n", counter);
    bar();
    printf("%d\n", counter);
    return 0;
}
```

*foo.c*

```
#include <stdio.h>

// "counter" is defined and
// initialized in foo.c.
// Here, we declare it, and
// specify external linkage
// by using the extern
// specifier.
extern int counter;

void bar(void) {
    counter++;
    printf("(b): counter %d\n",
           counter);
}
```

*bar.c*



# Internal linkage

```
#include <stdio.h>

// A global variable, defined and
// initialized here in foo.c.
// We force internal linkage by
// using the static specifier.
static int counter = 1;

int main(int argc, char **argv) {
    printf("%d\n", counter);
    bar();
    printf("%d\n", counter);
    return 0;
}
```

*foo.c*

```
#include <stdio.h>

// A global variable, defined and
// initialized here in bar.c.
// We force internal linkage by
// using the static specifier.
static int counter = 100;

void bar(void) {
    counter++;
    printf("(b): counter %d\n",
           counter);
}
```

*bar.c*



# Some gotchas

Every global (variables and functions) is extern by default

- unless you write the static specifier, if some other module uses the same name, you'll end up with a collision!
  - ▶ best case: compiler (or linker) error
  - ▶ worst case: stomp all over each other
- it's good practice to:
  - ▶ use static to defend your globals (hide your private stuff!)
  - ▶ place external (i.e., global) declarations in a module's header file



# Extern, static functions

```
// By using the static specifier, we are indicating
// that foo() should have internal linkage. Other
// .c files cannot see or invoke foo().
```

```
static int foo(int x) {
    return x*3 + 1;
}
```

```
// Bar is "extern" by default. Thus, other .c files
// could declare our bar() and invoke it.
```

```
int bar(int x) {
    return 2*foo(x);
}
```

*bar.c*

```
#include <stdio.h>
```

```
extern int bar(int);
```

```
int main(int argc, char **argv) {
    printf("%d\n", bar(5));
    return 0;
}
```

*main.c*



# Somebody should get fired



C has a second, different use for the word “static”

- to declare the extent of a local variable
- if you declare a static local variable, then:
  - ▶ the storage for that variable is allocated when the program loads, in either the program’s .data or .bss segment
  - ▶ the variable retains its value across multiple function invocations

*(see static\_extent.c for an example)*



# Additional C topics

## Teach yourself

- bit-level manipulation in C (cf CSE 351): `~` `|` `&` `<<` `>>`
- string library functions provided by the C standard library
  - ▶ `#include <string.h>`
    - `strlen()`, `strcpy()`, `strdup()`, `strcat()`, `strcmp()`, `strchr()`, `strstr()`, ...
    - learn why **`strncat`** is safer (in the security sense) than **`strcat`**, etc.
  - ▶ `#include <stdlib.h>` or `#include <stdio.h>`
    - `atoi()`, `atof()`, `sprintf()`, `sscanf()`
- **man** pages are your friend!



# Additional C topics

## Teach yourself

- the syntax for function pointers, including passing as args
- how to declare, define, and use a function that accepts a variable-lengthed number of arguments (**varargs**)
- **unions** and what they are good for
- what **argc** and **argv** are for in main

```
#include <stdio.h>

int main(int argc, char **argv) {
    int i;

    for (i = 0; i < argc, i++) {
        printf("%d: %s\n", i, argv[i]);
    }
    return 0;
}
```

argv.c

```
bash$ gcc -o argv argv.c
bash$ ./argv
0: ./argv
bash$ ./argv foo bar
0: ./argv
1: foo
2: bar
bash$
```



# Additional C topics

## Teach yourself:

- the difference between pre-increment ( $++v$ ) and post-increment ( $v++$ )
- the meaning of the “register” storage class
  - ▶ Might see it in code, but compilers often ignore it these days since they can often do a better job without it
- harder: the meaning of the “volatile” storage class
  - ▶ pages 91, 92 of CARM, much more precise in C11



# Exercise 1

Write a program that:

- prompts the user to input a string (use `fgets()`)
  - ▶ assume the string is a sequence of whitespace-separated integers
  - ▶ e.g., “5555 1234 4 5543”
- converts the string into an array of integers
- converts an array of integers into an array of strings
  - ▶ where each element of the string array is the binary representation of the associated integer
- prints out the array of strings



# Exercise 2

Modify the linked list code from last lecture / exercise 1

- add static declarations to any internal functions you implemented in `linkedlist.h`
- add a header guard to the header file
- write a Makefile
  - ▶ use Google to figure out how to add rules to the Makefile to produce a library (`liblinkedlist.a`) that contains the linked list code



See you on Wednesday!