CSE 333
Lecture 1 - Intro, C refresher

Hal Perkins

Paul G. Allen School of Computer Science & Engineering

University of Washington

Welcome!

Today's goals:

- **introductions**

- *course syllabus*

- *quick C refresher*

Introductions

Us (cse333-staff@cs - please use this address, not individual email)

- Hal Perkins (Instructor)

- Meghan Cowan, Renshu Gu, Steven Lyubomirsky, Josh Rios, Nathan Wong, and Jack Xu (TAs)
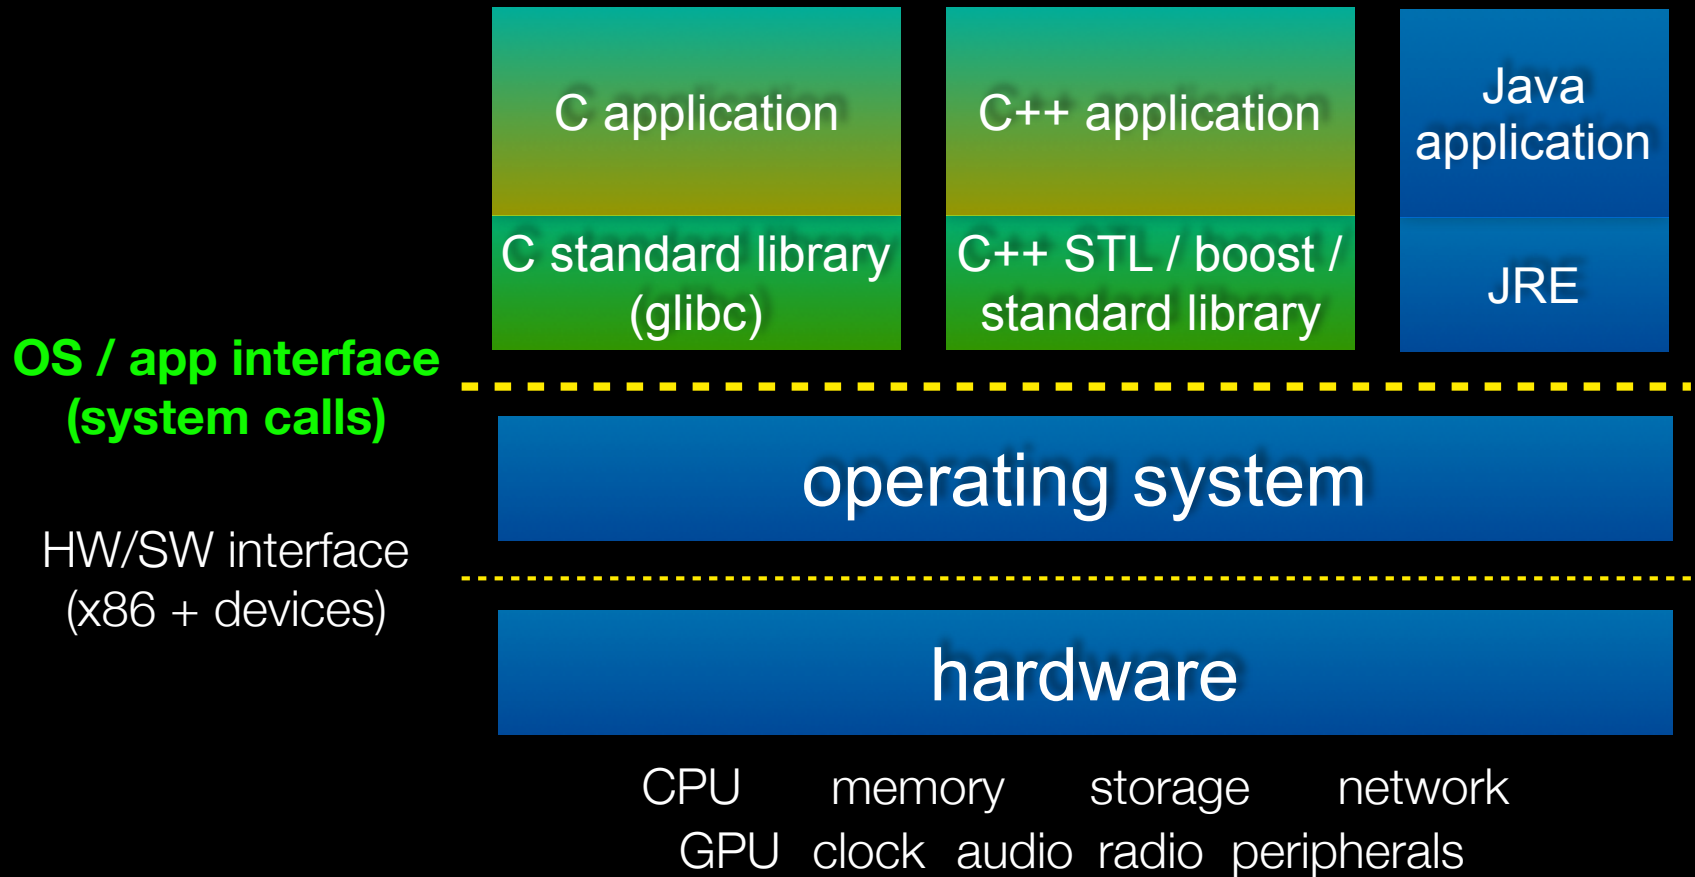
Most important: You!!

- Anyone still trying to register or add the class? Watch for openings; we'll collect names of anyone still trying to register on Friday

Welcome!

Today's goals:

- *introductions*

- **course syllabus (highlights only - read the whole thing on the web [yes, really do read it])**

- *quick C refresher*

Course map: 100,000 foot view

C application	C++ application	Java application
C standard library (glibc)	C++ STL / boost / standard library	JRE

OS / app interface (system calls)

operating system

HW/SW interface (x86 + devices)

hardware

CPU   memory   storage   network
GPU clock audio radio peripherals

Systems programming

The programming skills, engineering discipline, and knowledge you need to build a system

- **programming**: C / C++

- **discipline**: testing, debugging, performance analysis

- **knowledge**: long list of interesting topics

  ‣ concurrency, OS interfaces and semantics, techniques for consistent data management, distributed systems algorithms, …

  ‣ most important: a deep understanding of the "layer below"

    • *quiz: is data safely on disk after a "write( )" system call returns?*

Discipline?!?

Cultivate good habits, encourage clean code

- coding style conventions

- unit testing, code coverage testing, regression testing

- documentation (code comments, design docs)

- code reviews

Will take you a lifetime to learn

- but oh-so-important, especially for systems code

  ‣ avoid write-once, read-never code

What you will be doing

Attending lectures and sections

- lecture: ~28 of them, MWF here

- sections: ~10 of them, Thur. 8:30 (sorry), 9:30, 10:30 - go to your actual sec.

- Take notes!!!! Don't expect everything to be on the web

Doing programming projects

- 4 of them, successively building on each other, plus a warmup

- includes C, C++, file system, network

Doing programming exercises

- one per lecture, due in the morning before the next lecture

- coarse-grained grading (0,1,2,3)

Midterm and a final exam

- (Who is also taking 311 or 312? Trying to minimize scheduling conflicts)

Lecture laptop policy

Just say no!!

No open laptops during class (no kidding!)

- (unless we're doing something where everyone should participate)

Why? You will learn better if you are mentally present during the class (not just physically)

Got the urge to search? Ask a question!

Exception: if you *actually*, _really_, **_really_**, use a laptop or tablet to take notes, ok, but sit in the back row so you don't distract others

- But you'll learn more if you use paper instead! (really!!)

And no phone texting, web surfing, etc., either…

You may close your electronic devices now.

Deadlines & Conduct

Need to get things done on time (very hard to catch up)

- Programming assignments: **4** late days **total**, **2 max per project**

  ‣ Intended for unusual circumstances, not routine procrastination

- Exercises: **no late days** (max benefit that way)

Academic Integrity (details on the web; read them)

- I trust you implicitly; I will follow up if that trust is violated

- The rules boil down to: don't attempt to gain credit for something you didn't do; don't help others to do so

- That does *not* mean suffer in silence - you have colleagues, instructor, TAs - work with them; learn from each other!

Course web/calendar

Linked off of the course web page

- master schedule for the class (might change slightly)

- links to:

  ‣ lecture slides (posted night before class - preview & use for notes)

  ‣ code discussed in lectures

  ‣ assignments, exercises (including due dates)

  ‣ optional "self-exercise" solutions

  ‣ various C/C++/Linux/git/CSE resources

Explore!!!

Labs, office hours, &c

Office hours: plan is to have something Mon.-Fri.

- Initial schedule through next Mon. posted. Preferences?

Discussion board: stay in touch outside of class

- See main web page for link, post followup to welcome msg

Mailing list for announcements

- You are automatically subscribed when you are registered

Welcome!

Today's goals:

- *introductions*
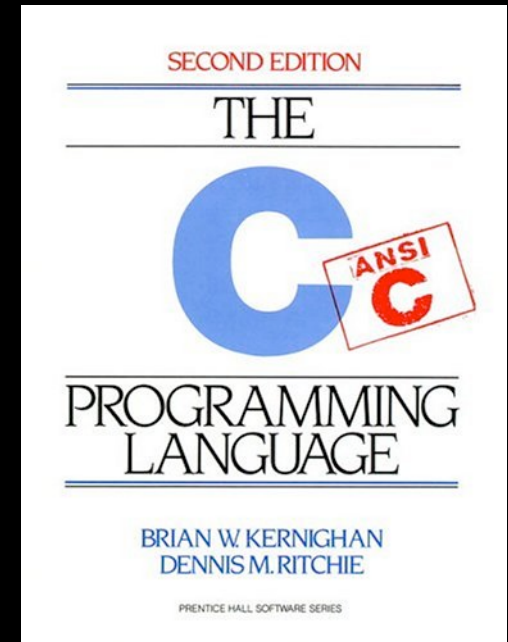
- *course syllabus*

- **quick C refresher**
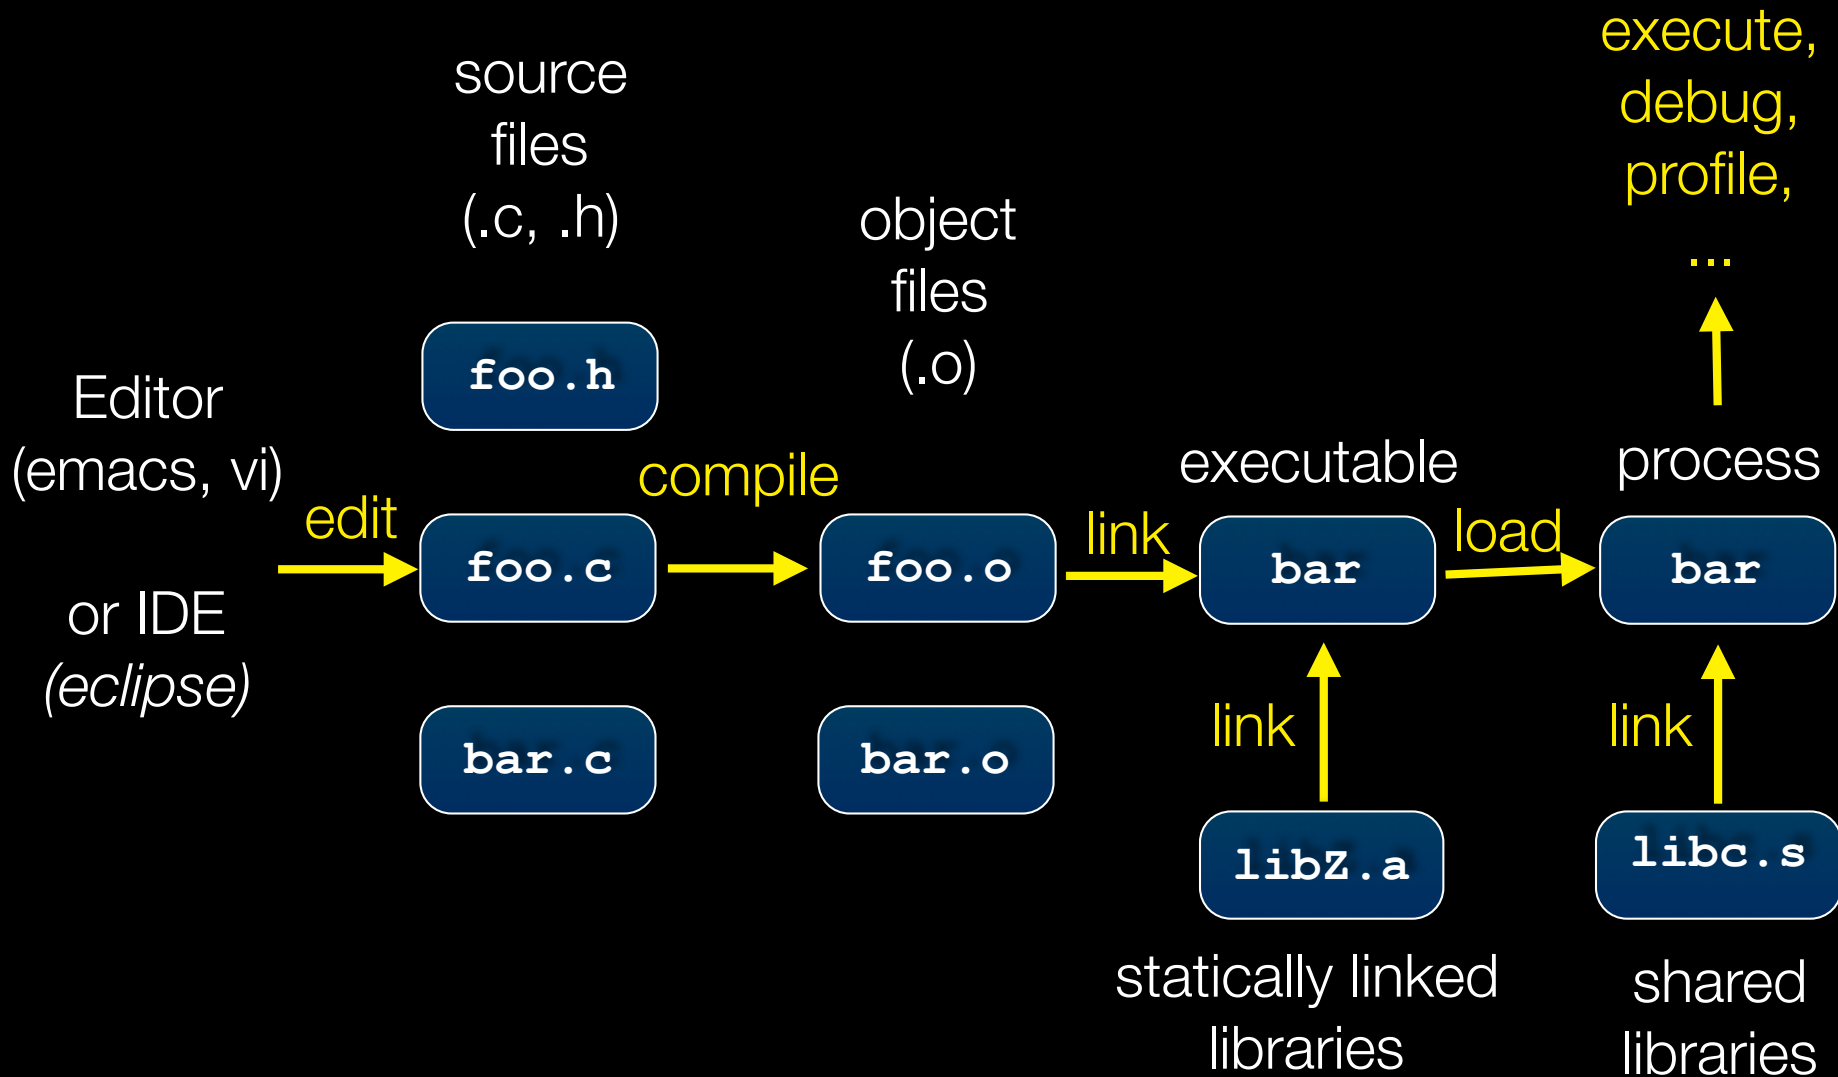
C

Created in 1972 by Dennis Ritchie

- designed for creating system software

- portable across machine architectures

- most recently updated in 1999 (C99) and 2011 (C11)

Characteristics

- low-level, smaller standard library than Java

- procedural (not object-oriented)

- typed but unsafe; incorrect programs can fail spectacularly

C workflow

source
files
(.c, .h)

object
files
(.o)

execute,
debug,
profile,
...

Editor
(emacs, vi)

or IDE
(eclipse)

foo.h

edit

foo.c

compile

foo.o

executable

link

bar

load

process

bar

bar.c

bar.o

link

link

libZ.a

libc.s

statically linked
libraries

shared
libraries

From C to machine code

C source file
(dosum.c)

```c
int dosum(int i, int j) {
    return i+j;
}
```

C compiler (gcc -S)

assembly source file
(dosum.s)

```asm
dosum:
    pushl    %ebp
    movl     %esp, %ebp
    movl     12(%ebp), %eax
    addl     8(%ebp), %eax
    popl     %ebp
    ret
```
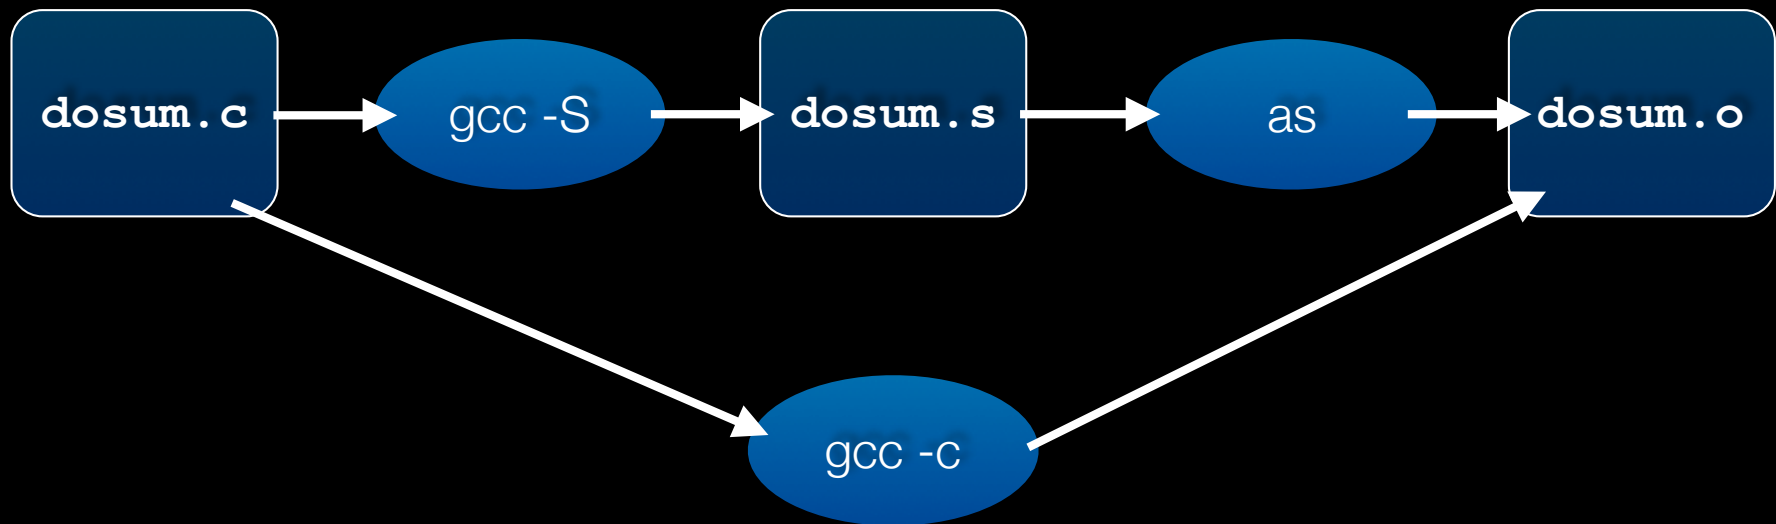
machine code
(dosum.o)

```
80483b0: 55
89 e5 8b 45
0c 03 45 08
    5d c3
```

assembler (as)

Skipping assembly language

Most C compilers generate .o files (machine code) directly

- i.e., without actually saving the readable .s assembly file

dosum.c → gcc -S → dosum.s → as → dosum.o

dosum.c → gcc -c → dosum.o

Multi-file C programs

C source file
(dosum.c)

```c
int dosum(int i, int j) {
    return i+j;
}
```

C source file
(sumnum.c)

```c
#include <stdio.h>

int dosum(int i, int j);

int main(int argc, char **argv) {
    printf("%d\n", dosum(1,2));
    return 0;
}
```

this "prototype" of
dosum( ) tells gcc
about the types of
dosum's arguments
and its return value

dosum( ) is
implemented
in dosum.c

Multi-file C programs

C source file
(dosum.c)

```c
int dosum(int i, int j) {
    return i+j;
}
```

C source file
(sumnum.c)

```c
#include <stdio.h>

int dosum(int i, int j);

int main(int argc, char **argv) {
    printf("%d\n", dosum(1,2));
    return 0;
}
```
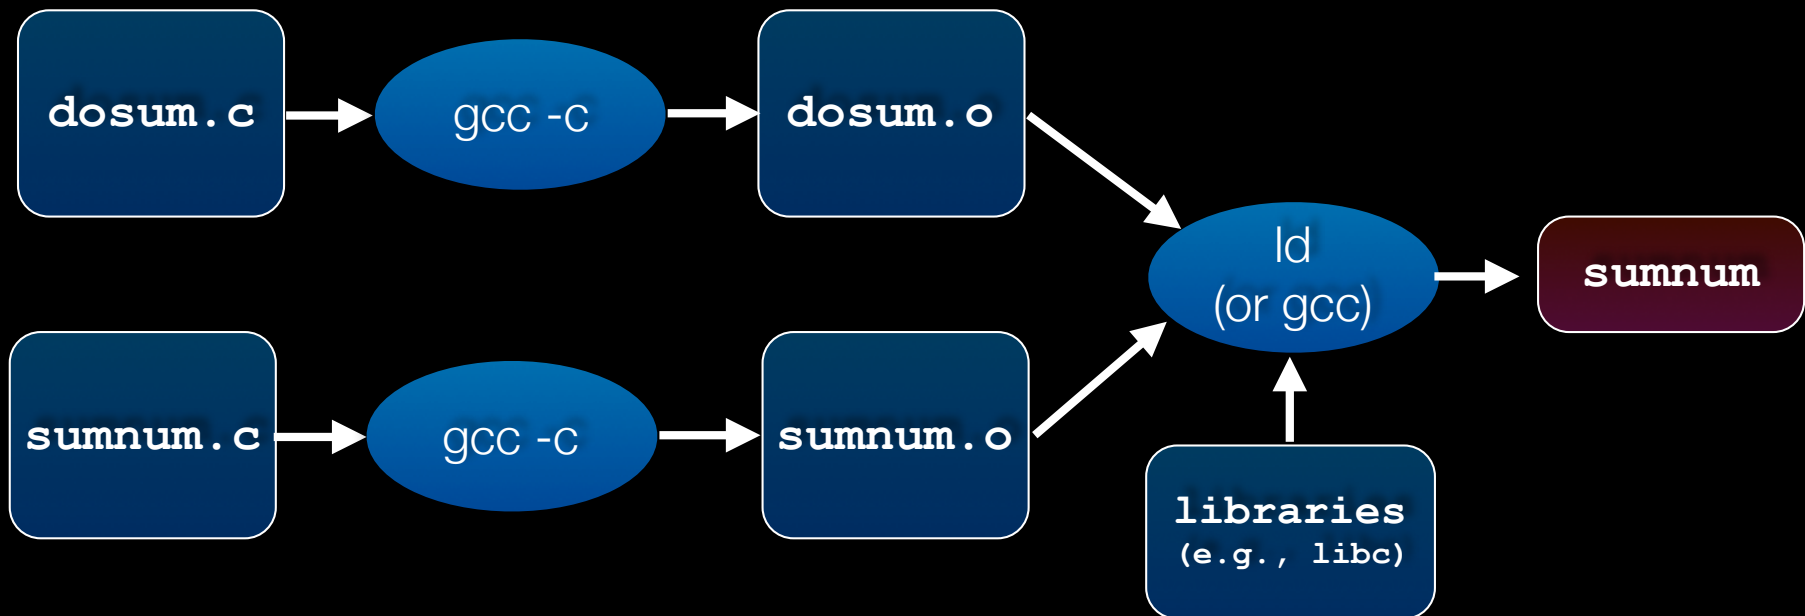
why do we need
this #include?

where is the
implementation
of printf?

Compiling multi-file programs

Multiple object files are ***linked*** to produce an executable

- standard libraries (libc, crt1, ...) are usually also linked in

- a library is just a pre-assembled collection of .o files

Object files

sumnum.o, dosum.o are **object files**

- each contains machine code produced by the compiler

- each might contain references to external symbols

  ‣ variables and functions not defined in the associated .c file

  ‣ e.g., sumnum.o contains code that relies on printf( ) and dosum( ), but these are defined in libc.a and dosum.o, respectively

- linking resolves these external symbols while smooshing together object files and libraries

Let's dive into C itself

Things that are the same as Java

- syntax for statements, control structures, function calls

- types: `int, double, char, long, float`

- type-casting syntax: `float x = (float) 5 / 3;`

- expressions, operators, precedence

  `+ - * / % ++ -- = += -= *= /= %= < <= == != > >= && || !`

- scope (local scope is within a set of `{ }` braces)

- comments: `/* comment */` `// comment`

Primitive types in C

typical sizes – see sizeofs.c

integer types

- char, int

floating point

- float, double

modifiers

- short [int]

- long [int, double]

- signed [char, int]

- unsigned [char, int]

type	bytes (32 bit)	bytes (64 bit)	32 bit range	printf
char	1	1	[0, 255]	%c
short int	2	2	[-32768,32767]	%hd
unsigned short int	2	2	[0, 65535]	%hu
int	4	4	[-214748648, 2147483647]	%d
unsigned int	4	4	[0, 4294967295]	%u
long int	4	8	[-2147483648, 2147483647]	%ld
long long int	8	8	[-9223372036854775808, 9223372036854775807]	%lld
float	4	4	approx $[10^{-38}, 10^{38}]$	%f
double	8	8	approx $[10^{-308}, 10^{308}]$	%lf
long double	12	16	approx $[10^{-4932}, 10^{4932}]$	%Lf
pointer	4	8	[0, 4294967295]	%p

C99 extended integer types

Solves the conundrum of "how big is a long int?"

```c
#include <stdint.h>

void foo(void) {
  int8_t  w;     // exactly 8 bits, signed
  int16_t x;     // exactly 16 bits, signed
  int32_t y;     // exactly 32 bits, signed
  int64_t z;     // exactly 64 bits, signed

  uint8_t a;     // exactly 8 bits, unsigned
  ...etc.
}
```

Similar to Java...

- variables

  ‣ C99/C11: don't have to declare at start of a function or block

  ‣ need not be initialized before use   *(gcc -Wall will warn)*

varscope.c

```c
#include <stdio.h>

int main(int argc, char **argv) {
  int x, y = 5;    // note x is uninitialized!
  long z = x+y;

  printf("z is '%ld'\n", z); // what's printed?
  {
    int y = 10;
    printf("y is '%d'\n", y);
  }
  int w = 20;   // ok in c99
  printf("y is '%d', w is '%d'\n", y, w);
  return 0;
}
```

Similar to Java...

const

- a qualifier that indicates the variable's value cannot change

- compiler will issue an **error** if you try to violate this

- why is this qualifier useful?

consty.c

```c
#include <stdio.h>

int main(int argc, char **argv) {
  const double MAX_GPA = 4.0;

  printf("MAX_GPA: %g\n", MAX_GPA);
  MAX_GPA = 5.0;  // illegal!
  return 0;
}
```

Similar to Java…

for loops

- C99/C11: can declare variables in the loop header

if/else, while, and do/while loops

- C99/C11: **bool** type supported, with #include <stdbool.h>

- any type can be used; 0 means **false**, everything else **true**

loopy.c

```c
int i;

for (i = 0; i < 100; i++) {
  if (i % 10 == 0) {
    printf("i: %d\n", i);
  }
}
```

Similar to Java...

pointy.c

parameters / return value

- C always passes arguments by value

- "pointers"

  ‣ lets you pass by reference

  ‣ more on these soon

  ‣ least intuitive part of C

  ‣ very dangerous part of C

```c
void add_pbv(int c) {
  c += 10;
  printf("pbv c: %d\n", c);
}

void add_pbr(int *c) {
  *c += 10;
  printf("pbr *c: %d\n", *c);
}

int main(int argc, char **argv) {
  int x = 1;

  printf("x: %d\n", x);

  add_pbv(x);
  printf("x: %d\n", x);

  add_pbr(&x);
  printf("x: %d\n", x);

  return 0;
}
```

Very different than Java

arrays

- just a bare, contiguous block of memory of the correct size

- an array of 10 ints requires 10 x 4 bytes = 40 bytes of memory

arrays have no methods, do not know their own length

- C doesn't stop you from overstepping the end of an array!!

- many, many security bugs come from this

Very different than Java

strings

- array of char

- terminated by the NULL character '\0'

- are not objects, have no methods; string.h has helpful utilities


```
char *x = "hello\n";
```

Very different than Java

errors and exceptions

- C has no exceptions (no try / catch)

- errors are returned as integer error codes from functions

- makes error handling ugly and inelegant

crashes

- if you do something bad, you'll end up spraying bytes around memory, hopefully causing a "segmentation fault" and crash

objects

- there aren't any; struct is closest feature (set of fields)

Very different than Java

memory management

- **you** must worry about this; there is no garbage collector

- local variables are allocated off of the stack

  ‣ freed when you return from the function

- global and static variables are allocated in a data segment

  ‣ are freed when your program exits

- you can allocate memory in the heap segment using malloc( )

  ‣ you must free malloc'ed memory with free( )

  ‣ failing to free is a leak, double-freeing is an error (hopefully crash)

Very different than Java

Libraries you can count on

- C has very few compared to most other languages

- no built-in trees, hash tables, linked lists, sort , etc.

- you have to write many things on your own

  ‣ particularly data structures

  ‣ error prone, tedious, hard to build efficiently and portably

- this is one of the main reasons C is a much less productive language than Java, C++, python, or others

For Friday

Exercise 0 is due in the morning, 10am, *before* class:

- http://courses.cs.washington.edu/courses/cse333/17au/exercises/ex00.html

- (Easier: look on the calendar or homework page for the link)

- Not registered yet? Do the exercise and submit it anyway!

Post a message on the discussion board

- Get it to keep track of new messages for you!

But before then….

HW0 and tomorrow's sections

hw0 out later today

- Logistics and infrastructure - should be quick

- Demos & setup in sections tomorrow

  ‣ **Bring a laptop to sections if you can w/CSE VM installed if you use it**

- Do not be alarmed by email from GitLab when repos are created

- Be sure to try to clone the repo tomorrow so we can fix glitches Friday

Reference system (grading, etc.) is CSE lab/attu/VM Linux

- If you use the CSE Linux VM, be sure it's the latest one and run 'sudo yum update'

hw1 (first big project) out by this weekend

See you on Friday!