

Binary Search Trees

CSE 373
Data Structures & Algorithms
Ruth Anderson
Autumn 2011

10/10/2011

cse 373 11au - Binary Search Trees

1

Today's Outline

- **Announcements**
 - Assignment #2 due Fri, Oct 14, posted
- **Today's Topics:**
 - Asymptotic Analysis
 - Binary Search Trees

10/10/2011


cse 373 11au - Binary Search Trees

2

Tree Calculations

Recall: height is max number of edges from root to a leaf

Find the height of the tree...



runtime:


10/10/2011

cse 373 11au - Binary Search Trees

3

Tree Calculations Example

What is the **height** of this tree?



What is the **depth** of node L?


10/10/2011

cse 373 11au - Binary Search Trees

4

More Recursive Tree Calculations: Tree Traversals

A *traversal* is an order for visiting all the nodes of a tree



Three types:

- Pre-order: Root, left subtree, right subtree
- In-order: Left subtree, root, right subtree
- Post-order: Left subtree, right subtree, root

10/10/2011

cse 373 11au - Binary Search Trees

5

Traversals

```
void traverse(BNode t){  
    if (t != NULL)  
        traverse (t.left);  
    print t.element;  
    traverse (t.right);  
}
```

Which one is this?

10/10/2011


cse 373 11au - Binary Search Trees

6

Binary Trees

- Binary tree is
 - a root
 - left subtree (*maybe empty*)
 - right subtree (*maybe empty*)
- Representation:

Data	
left pointer	right pointer




10/10/2011

cse 373 11au - Binary Search Trees

7

Binary Tree: Representation

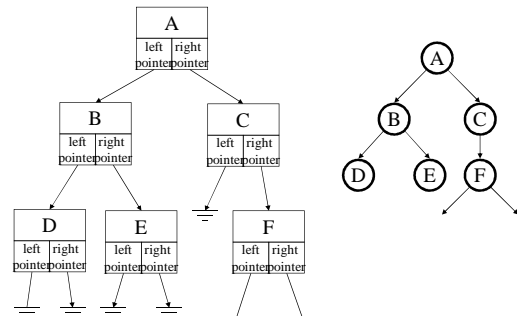


10/10/2011

cse 373 11au - Binary Search Trees

8

Binary Tree: Special Cases

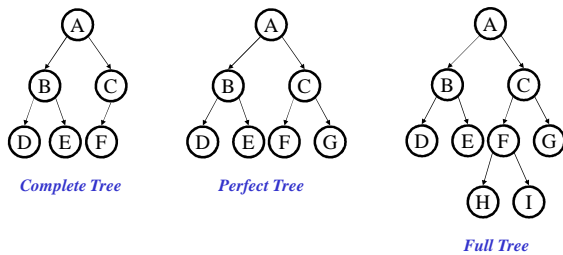

10/10/2011

cse 373 11au - Binary Search Trees

9

ADTs Seen So Far

- Stack
 - Push
 - Pop
- Queue
 - Enqueue
 - Dequeue

10/10/2011

cse 373 11au - Binary Search Trees

10

The Dictionary ADT

- Data:
 - a set of (key, value) pairs
- Operations:
 - Insert (key, value)
 - Find (key)
 - Remove (key)

insert(swetko, ...)

find(darylh)

• darylh
Daryl Hansen, ...

- swetko
Svetoslav Kolev
OH: W 12:15-1:15pm,
F 12:30-1:30pm,
CSE 220
- armstnp
Nathan Armstrong
OH: Th 3-4pm
CSE 218
- darylh
Daryl Hansen
OH: Tu 2-3pm
CSE 220

The Dictionary ADT is sometimes called the "Map ADT"

10/10/2011

cse 373 11au - Binary Search Trees

11

A Modest Few Uses

- Search : phone directories or other large data sets (genome maps, web pages)
- Networks : Router tables
- Operating systems : Page tables
- Compilers : Symbol tables

Probably the most widely used ADT!

10/10/2011

cse 373 11au - Binary Search Trees

12

Implementations

insert find delete

- Unsorted Linked-list
- Unsorted array
- Sorted array


10/10/2011

cse 373 11au - Binary Search Trees

13

Binary Search Tree Data Structure

- Structural property
 - each node has ≤ 2 children
 - result:
 - storage is small
 - operations are simple
 - average depth is small
- Order property
 - all keys in left subtree smaller than root's key
 - all keys in right subtree larger than root's key
 - result: easy to find any given key




- What must I know about what I store?

10/10/2011

cse 373 11au - Binary Search Trees

15

Are these BSTs?

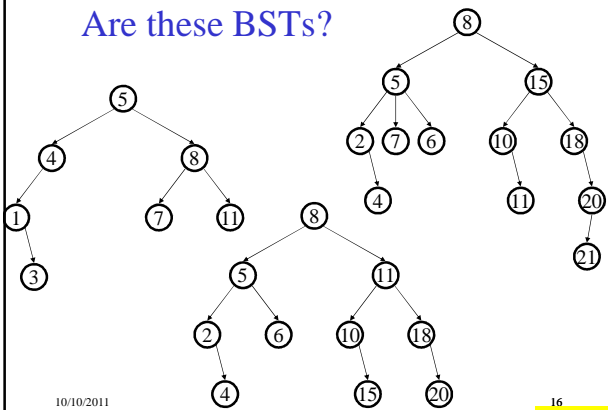


10/10/2011

16

Activity

Find in BST, Recursive



```
Node Find(Object key,
           Node root) {
    if (root == NULL)
        return NULL;

    if (key < root.key)
        return Find(key,
                    root.left);
    else if (key > root.key)
        return Find(key,
                    root.right);
    else
        return root;
}
```

Runtime:


10/10/2011

cse 373 11au - Binary Search Trees

17

Find in BST, Iterative

```
Node Find(Object key,
           Node root) {
    while (root != NULL &&
           root.key != key) {
        if (key < root.key)
            root = root.left;
        else
            root = root.right;
    }
    return root;
}
```




Runtime:

10/10/2011

cse 373 11au - Binary Search Trees

18

Insert in BST



Insert(13)
Insert(8)
Insert(31)

Runtime:

10/10/2011

cse 373 11au - Binary Search Trees

19

BuildTree for BST

- Suppose keys 1, 2, 3, 4, 5, 6, 7, 8, 9 are inserted into an initially empty BST.

Runtime depends on the order!

- in given order
- in reverse order
- median first, then left median, right median, etc.


10/10/2011

cse 373 11au - Binary Search Trees

20

Bonus: FindMin/FindMax

- Find minimum
- Find maximum




10/10/2011

cse 373 11au - Binary Search Trees

21

Deletion in BST



Why might deletion be harder than insertion?

10/10/2011


cse 373 11au - Binary Search Trees

22

Lazy Deletion

Instead of physically deleting nodes, just mark them as deleted

- + simpler
- + physical deletions done in batches
- + some adds just flip deleted flag
- extra memory for deleted flag
- many lazy deletions slow finds
- some operations may have to be modified (e.g., min and max)



10/10/2011

cse 373 11au - Binary Search Trees

23

Non-lazy Deletion

- Removing an item disrupts the tree structure.
- Basic idea: **find** the node that is to be removed. Then “fix” the tree so that it is still a binary search tree.
- Three cases:
 - node has no children (leaf node)
 - node has one child
 - node has two children


10/10/2011

cse 373 11au - Binary Search Trees

24

Non-lazy Deletion – The Leaf Case

Delete(17)




10/10/2011

cse 373 11au - Binary Search Trees

25

Deletion – The One Child Case

Delete(15)




10/10/2011

cse 373 11au - Binary Search Trees

26

Deletion – The Two Child Case

Delete(5)



What can we replace 5 with?

10/10/2011

cse 373 11au - Binary Search Trees

27

Deletion – The Two Child Case

Idea: Replace the deleted node with a value guaranteed to be between the two child subtrees!

Options:

- *succ* from right subtree: findMin(t.right)
- *pred* from left subtree : findMax(t.left)

Now delete the original node containing *succ* or *pred*


- Leaf or one child case – easy!

10/10/2011

cse 373 11au - Binary Search Trees

28

Finally...



Original node containing 7 gets deleted

10/10/2011

cse 373 11au - Binary Search Trees

29

Binary Tree: Some Numbers

Recall: height of a tree = longest path from root to leaf (count # of edges)

For binary tree of height h :

- max # of leaves:
- max # of nodes:
- min # of leaves:
- min # of nodes:

10/10/2011

cse 373 11au - Binary Search Trees

30

Balanced BST

Observation

- BST: the shallower the better!
- For a BST with n nodes
 - Average height is $\Theta(\log n)$
 - Worst case height is $\Theta(n)$
- Simple cases such as insert(1, 2, 3, ..., n) lead to the worst case scenario

Solution: Require a **Balance Condition** that

1. ensures depth is $\Theta(\log n)$ – strong enough!
2. is easy to maintain – not too strong!

10/10/2011

cse 373 11au - Binary Search Trees

31

Potential Balance Conditions

1. Left and right subtrees of the root
have equal number of nodes
2. Left and right subtrees of the root
have equal *height*

10/10/2011

cse 373 11au - Binary Search Trees

32

Potential Balance Conditions

3. Left and right subtrees of *every node*
have equal number of nodes
4. Left and right subtrees of *every node*
have equal *height*

10/10/2011

cse 373 11au - Binary Search Trees

33