

Principles of Database Systems

CSE 544p

Lecture #1

September 29, 2010

Staff

- Instructor: Dan Suciu
 - CSE 662, suciu@cs.washington.edu
Office hours: by appointment
- TAs:
 - Jessica Leung joyleung@cs.washington.edu
 - TA: Paramjit Singh Sandhu paramsan@cs.washington.edu
- Technical support:
 - At UW: Fred Videon, fred@cs.washington.edu
 - At MS: Matt McGinley

Communications

- Web page:
<http://www.cs.washington.edu/p544>
 - Lectures will be available here
 - Homework will be posted here
 - Announcements may be posted here
- Mailing list:
 - Announcements, group discussions
 - Please subscribe

Textbook(s)

Main textbook:

- *Database Management Systems*,
Ramakrishnan and Gehrke

Second textbook:

- *Database Systems: The Complete Book*,
Garcia-Molina, Ullman, Widom

Course Format

- Lectures Wednesdays, 6:30-9:20
- 7 Homework Assignments
- Take-home Final

Grading

- Homework: 70 %
- Take-home Final: 30%

Homework Assignments

1. SQL
2. Conceptual design
3. JAVA/SQL
4. Transactions
5. Database tuning
6. XML/XPath/XQuery
7. Pig Latin, on AWS

Due: Tuesdays', by 11:59pm. Three late days per person

Take-home Final

- Posted on December 8, at 11:59pm
- Due on December 9, by 11:59pm
- No late days/hours/minutes/seconds

December 9th **is** the day of your final

Software Tools

- SQL Server 2008
 - You have access to <http://msdnaa.cs.washington.edu>
 - Username is full @cs.washington.edu email address
 - Doesn't work ? Email ms-sw-admin@cs.washington.edu
 - Download the client, connect to IPROJSRV (may need tunneling)
 - OK to use you own server, just import IMDB (may need tunneling)
- Postgres: download from
 - [download http://www.postgresql.org/download/](http://www.postgresql.org/download/)
 - Is also installed on lab machines
- Xquery: download one interpreter from
 - Zorba: <http://www.zorba-xquery.com/> (I use this one: ½ day installation)
 - Galax: <http://galax.sourceforge.net/> (great in the past, seems less well maintained)
 - Saxon: <http://saxon.sourceforge.net/> (from apache; very popular)
- Pig Latin: download from
 - <http://hadoop.apache.org/pig/>
 - We will also run it on Amazon Web Services

Rest of Today's Lecture

- Overview of DBMS
- SQL

Database

What is a database ?

Give examples of databases

Database

What is a database ?

- A collection of files storing related data

Give examples of databases

- Accounts database; payroll database; UW's students database; Amazon's products database; airline reservation database

Database Management System

What is a DBMS ?

Give examples of DBMS

Database Management System

What is a DBMS ?

- *A big C program written by someone else that allows us to manage efficiently a large database and allows it to persist over long periods of time*

Give examples of DBMS

- DB2 (IBM), SQL Server (MS), Oracle, Sybase
- MySQL, Postgres, ...

SQL for Nerds, Greenspun, <http://philip.greenspun.com/sql/> (Chap 1,2)

Market Shares

From 2006 Gartner report:

- IBM: 21% market with \$3.2BN in sales
- Oracle: 47% market with \$7.1BN in sales
- Microsoft: 17% market with \$2.6BN in sales

An Example

The Internet Movie Database

<http://www.imdb.com>

- Entities:
Actors (800k), Movies (400k), Directors, ...
- Relationships:
who played where, who directed what, ...

Tables

Actor:

id	fName	lName	gender
195428	Tom	Hanks	M
645947	Amy	Hanks	F
...			

Cast:

pid	mid
195428	337166
...	

Movie:

id	Name	year
337166	Toy Story	1995
...

SQL

```
SELECT *  
FROM Actor
```

SQL

```
SELECT count(*)  
FROM Actor
```

This is an *aggregate query*

SQL

```
SELECT *  
FROM Actor  
WHERE IName = 'Hanks'
```

This is a *selection query*

SQL

```
SELECT *  
FROM Actor, Casts, Movie  
WHERE Iname='Hanks' and Actor.id = Casts.pid  
and Casts.mid=Movie.id and Movie.year=1995
```

This query has *selections* and *joins*

817k actors, 3.5M casts, 380k movies;

How can it be so fast ?

How Can We Evaluate the Query ?

Actor:

id	fName	lName	gender
...		Hanks	
...			

Cast:

pid	mid
...	
...	


Movie:

id	Name	year
...		1995
...		

Plan 1: [in class]

Plan 2: [in class]

Evaluating Tom Hanks

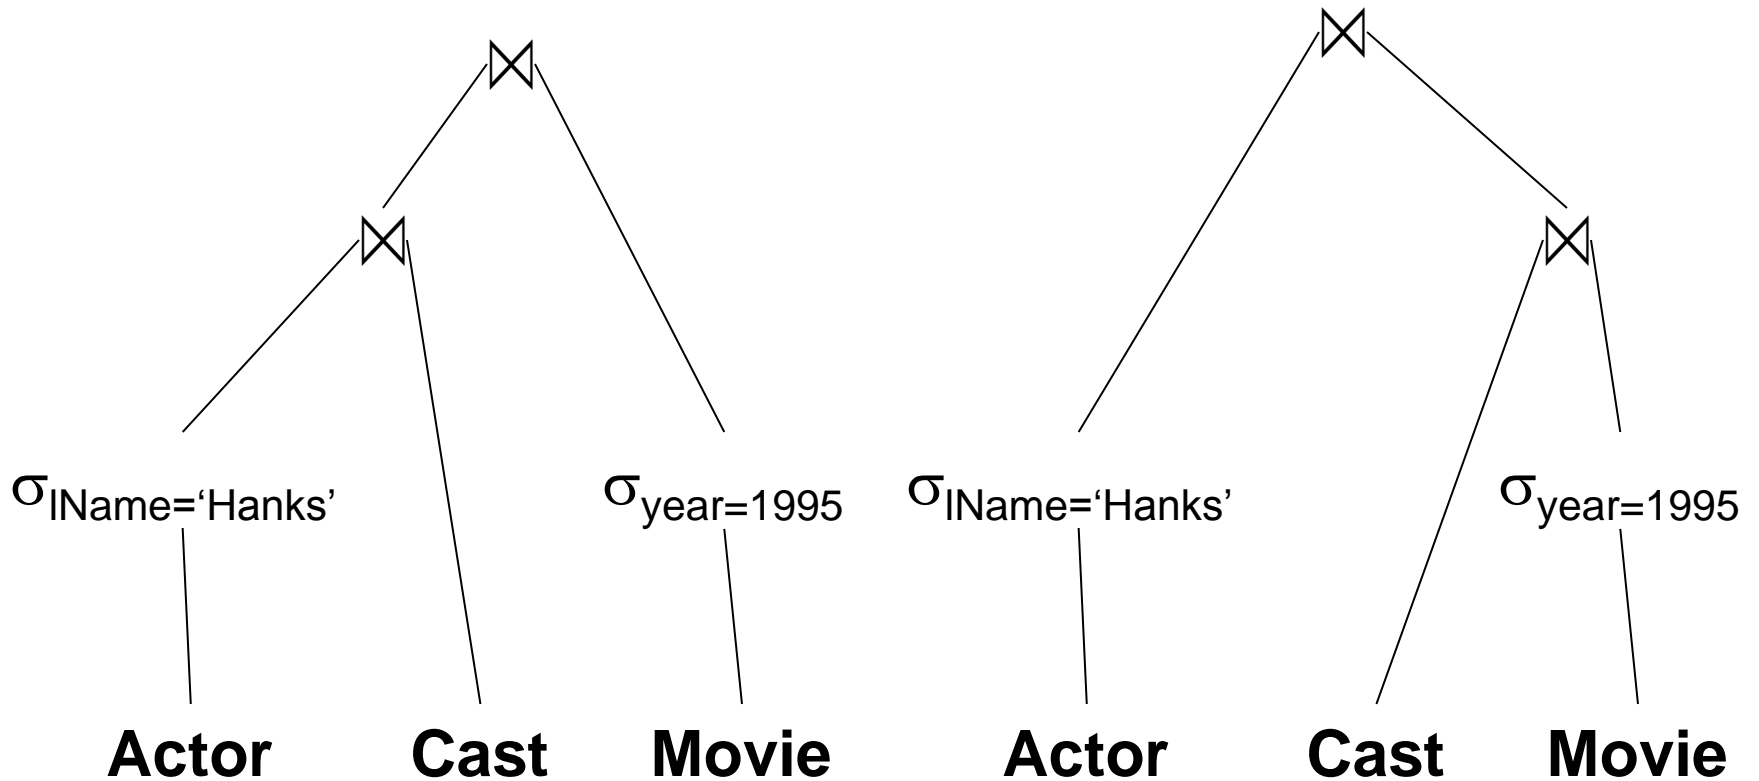

Optimization and Query Execution

- Indexes: on Actor.IName, on Movie.year
- Query optimization
 - Access path selection
 - Join order
- Statistics
- Multiple implementations of joins

Recovery

- Transfer \$100 from account #4662 to #7199:

```
X = Read(Account_1);  
X.amount = X.amount - 100;  
Write(Account_1, X);
```

```
Y = Read(Account_2);  
Y.amount = Y.amount + 100;  
Write(Account_2, Y);
```

Recovery

- Transfer \$100 from account #4662 to #7199:

```
X = Read(Account_1);  
X.amount = X.amount - 100;  
Write(Account_1, X);
```

CRASH !

```
Y = Read(Account_2);  
Y.amount = Y.amount + 100;  
Write(Account_2, Y);
```

What is the problem ?

Concurrency Control

- How to overdraft your account:



User 1

```
X = Read(Account);  
if (X.amount > 100)  
  { dispense_money( );  
    X.amount = X.amount - 100;  
  }  
else error("Insufficient funds");
```



User 2

```
X = Read(Account);  
if (X.amount > 100)  
  { dispense_money( );  
    X.amount = X.amount - 100;  
  }  
else error("Insufficient funds");
```

What can go wrong ?

Transactions

- Recovery
- Concurrency control

ACID =

- Atomicity (= recovery)
- Consistency
- Isolation (= concurrency control)
- Durability

Client/Server Database Architecture

- There is one single *server* that stores the database (called DBMS or RDBMS):
 - Usually a beefed-up system, e.g. IPROJSRV
 - But can be your own desktop...
 - ... or a huge cluster running a parallel dbms
- Many *clients* running apps and connecting to DBMS
 - E.g. Microsoft's Management Studio
 - Or psql (for postgres)
 - Always: some else's big Java or C++ program
- The client “talks” to the server using JDBC protocol

Types of Usages for Databases

- OLTP (online-transaction-processing)
 - Many updates
 - Many “point queries”: retrieve the record with a given key.
- Decision-Support
 - Many aggregate/group-by queries.
 - Sometimes called *data warehouse*

SQL v.s. noSQL

- Reading for next time:
SQL Databases v. NoSQL Databases, by Mike Stonebraker, CACM 53(4), 2010.

Data Management

- Data Management is more than databases !

Here is an example of a problem:

- Alice sends Bob in random order all the numbers 1, 2, 3, ..., 1000000000000000000000000
- She does not repeat any number
- But she misses exactly one
- Help Bob find out which one is missing !

After you solve it, make it a bit harder:

- Alice misses exactly ten numbers
- Help Bob find out which ones are missing !

Accessing SQL Server

- SQL Server Management Studio
- Server Type = Database Engine
- Server Name = IPROJSRV
- Authentication = SQL Server Authentication
 - Login = your UW email address (not the CSE email)
 - Password = [in class]
- Must connect from within CSE, or must use tunneling
- Alternatively: install your own, get it from MSDNAA (see earlier slide)
- Then play with IMDB, start working on HW 1

Outline for Today

- Basics: we go quickly or skip slides, please read the slides at home
 - Datatypes in SQL
 - Simple Queries in SQL
 - Joins
- Subqueries: this is tough ! Please read the relational calculus and tuple calculus in the textbook (Chapter 4.3)
- Aggregates: separates pros from amateurs
- Nulls, Outer joins

SQL

- Data Definition Language (DDL)
 - Create/alter/delete tables and their attributes
 - Following lectures...
- Data Manipulation Language (DML)
 - Query one or more tables – discussed next !
 - Insert/delete/modify tuples in tables

Table name

Tables in SQL

Attribute names

Product

Key

<u>PName</u>	Price	Category	Manufacturer
Gizmo	\$19.99	Gadgets	GizmoWorks
Powergizmo	\$29.99	Gadgets	GizmoWorks
SingleTouch	\$149.99	Photography	Canon
MultiTouch	\$203.99	Household	Hitachi

Tuples or rows

Data Types in SQL


- Atomic types:
 - Characters: CHAR(20), VARCHAR(50)
 - Numbers: INT, BIGINT, SMALLINT, FLOAT
 - Others: MONEY, DATETIME, ...
- Record (aka tuple)
 - Has atomic attributes
- Table (relation)
 - A set of tuples

Simple SQL Query

Product

PName	Price	Category	Manufacturer
Gizmo	\$19.99	Gadgets	GizmoWorks
Powergizmo	\$29.99	Gadgets	GizmoWorks
SingleTouch	\$149.99	Photography	Canon
MultiTouch	\$203.99	Household	Hitachi

```
SELECT *  
FROM Product  
WHERE category='Gadgets'
```



PName	Price	Category	Manufacturer
Gizmo	\$19.99	Gadgets	GizmoWorks
Powergizmo	\$29.99	Gadgets	GizmoWorks


“selection”

Simple SQL Query

Product

PName	Price	Category	Manufacturer
Gizmo	\$19.99	Gadgets	GizmoWorks
Powergizmo	\$29.99	Gadgets	GizmoWorks
SingleTouch	\$149.99	Photography	Canon
MultiTouch	\$203.99	Household	Hitachi

```
SELECT PName, Price, Manufacturer
FROM Product
WHERE Price > 100
```



“selection” and
“projection”

PName	Price	Manufacturer
SingleTouch	\$149.99	Canon
MultiTouch	\$203.99	Hitachi

Details

- Case insensitive:

SELECT = Select = select

Product = product

BUT: 'Seattle' ≠ 'seattle'


- Constants:

'abc' - yes

"abc" - no

Eliminating Duplicates


```
SELECT DISTINCT category  
FROM Product
```



Category
Gadgets
Photography
Household

Compare to:

```
SELECT category  
FROM Product
```



Category
Gadgets
Gadgets
Photography
Household

Ordering the Results


```
SELECT pname, price, manufacturer
FROM Product
WHERE category='gizmo' AND price > 50
ORDER BY price, pname
```

Ties are broken by the second attribute on the ORDER BY list.

Ordering is ascending, unless you specify the DESC keyword.


PName	Price	Category	Manufacturer
Gizmo	\$19.99	Gadgets	GizmoWorks
Powergizmo	\$29.99	Gadgets	GizmoWorks
SingleTouch	\$149.99	Photography	Canon
MultiTouch	\$203.99	Household	Hitachi

```
SELECT DISTINCT category  
FROM Product  
ORDER BY category
```




?

```
SELECT Category  
FROM Product  
ORDER BY PName
```



?

```
SELECT DISTINCT category  
FROM Product  
ORDER BY PName
```



?

Keys and Foreign Keys

Company

<u>CName</u>	StockPrice	Country
GizmoWorks	25	USA
Canon	65	Japan
Hitachi	15	Japan

Key

Product

<u>PName</u>	Price	Category	Manufacturer
Gizmo	\$19.99	Gadgets	GizmoWorks
Powergizmo	\$29.99	Gadgets	GizmoWorks
SingleTouch	\$149.99	Photography	Canon
MultiTouch	\$203.99	Household	Hitachi

Foreign key

Joins

Product (PName, Price, Category, Manufacturer)

Company (CName, stockPrice, Country)

Find all products under \$200 manufactured in Japan;
return their names and prices.

```
SELECT PName, Price
FROM Product, Company
WHERE Manufacturer=CName AND Country='Japan'
AND Price <= 200
```



Join
between Product
and Company

Joins


Product

PName	Price	Category	Manufacturer
Gizmo	\$19.99	Gadgets	GizmoWorks
Powergizmo	\$29.99	Gadgets	GizmoWorks
SingleTouch	\$149.99	Photography	Canon
MultiTouch	\$203.99	Household	Hitachi

Company

Cname	StockPrice	Country
GizmoWorks	25	USA
Canon	65	Japan
Hitachi	15	Japan

```
SELECT PName, Price
FROM Product, Company
WHERE Manufacturer=CName AND Country='Japan'
AND Price <= 200
```



PName	Price
SingleTouch	\$149.99


Tuple Variables

Person(pname, address, worksfor)


Company(cname, address)

Which
address ?

```
SELECT DISTINCT pname, address
FROM Person, Company
WHERE worksfor = cname
```



```
SELECT DISTINCT Person.pname, Company.address
FROM Person, Company
WHERE Person.worksfor = Company.cname
```



```
SELECT DISTINCT x.pname, y.address
FROM Person AS x, Company AS y
WHERE x.worksfor = y.cname
```

In Class

Product (pname, price, category, manufacturer)

Company (cname, stockPrice, country)

Find all Chinese companies that manufacture products both in the 'toy' category

```
SELECT  cname
```

```
FROM
```

```
WHERE
```


In Class

Product (pname, price, category, manufacturer)

Company (cname, stockPrice, country)

Find all Chinese companies that manufacture products both in the 'electronic' and 'toy' categories

```
SELECT  cname
```

```
FROM
```

```
WHERE
```

Meaning (Semantics) of SQL Queries

```
SELECT a1, a2, ..., ak  
FROM R1 AS x1, R2 AS x2, ..., Rn AS xn  
WHERE Conditions
```

```
Answer = {}  
for x1 in R1 do  
  for x2 in R2 do  
    .....  
    for xn in Rn do  
      if Conditions  
        then Answer = Answer ∪ {(a1, ..., ak)}  
return Answer
```

Using the Formal Semantics

What do these queries compute ?

```
SELECT DISTINCT R.A  
FROM R, S  
WHERE R.A=S.A
```

Returns $R \cap S$

```
SELECT DISTINCT R.A  
FROM R, S, T  
WHERE R.A=S.A OR R.A=T.A
```

If $S \neq \emptyset$ and $T \neq \emptyset$
then returns $R \cap (S \cup T)$
else returns \emptyset

Joins Introduce Duplicates

Product (pname, price, category, manufacturer)

Company (cname, stockPrice, country)

Find all countries that manufacture some product in the 'Gadgets' category.

```
SELECT Country
FROM Product, Company
WHERE Manufacturer=CName AND Category='Gadgets'
```

Joins Introduce Duplicates


Product

<u>Name</u>	Price	<u>Category</u>	Manufacturer
Gizmo	\$19.99	Gadgets	GizmoWorks
Powergizmo	\$29.99	Gadgets	GizmoWorks
SingleTouch	\$149.99	Photography	Canon
MultiTouch	\$203.99	Household	Hitachi

Company

<u>Cname</u>	StockPrice	Country
GizmoWorks	25	USA
Canon	65	Japan
Hitachi	15	Japan

```
SELECT Country
FROM Product, Company
WHERE Manufacturer=CName AND Category='Gadgets'
```



Country
USA
USA

Duplicates !
Remember to
add DISTINCT

Subqueries

- A *subquery* is another SQL query nested inside a larger query
- Such inner-outer queries are called *nested queries*
- A subquery may occur in:
 1. A SELECT clause
 2. A FROM clause
 3. A WHERE clause

Rule of thumb: avoid writing nested queries when possible; keep in mind that sometimes it's impossible

1. Subqueries in SELECT

Product (pname, price, company)

Company(cname, city)

For each product return the city where it is manufactured

```
SELECT X.pname, (SELECT Y.city
                  FROM Company Y
                  WHERE Y.cname=X.company)
FROM Product X
```

What happens if the subquery returns more than one city ?

1. Subqueries in SELECT

Product (pname, price, company)

Company(cname, city)

Whenever possible, don't use a nested queries:

```
SELECT pname, (SELECT city FROM Company WHERE cname=company)
FROM Product
```

=

```
SELECT pname, city
FROM Product, Company
WHERE cname=company
```

We have
“unnested”
the query

1. Subqueries in SELECT

Product (pname, price, company)

Company(cname, city)

Compute the number of products made in each city

```
SELECT DISTINCT city, (SELECT count(*)  
                        FROM Product  
                        WHERE cname=company)  
FROM Company
```

Better: we can unnest by using a GROUP BY (next lecture)

2. Subqueries in FROM

Product (pname, price, company)

Company(cname, city)

Find all products whose prices is > 20 and < 30

```
SELECT X.city
FROM (SELECT * FROM Product AS Y WHERE Y.price > 20) AS X
WHERE X.price < 30
```

Unnest this query !

3. Subqueries in WHERE

Product (pname, price, company)
Company(cname, city)

Existential quantifiers

Find all cities that make some products with price < 100

Using **EXISTS**:

```
SELECT DISTINCT Company.city
FROM Company
WHERE EXISTS (SELECT *
              FROM Product
              WHERE company = cname and Produc.price < 100)
```

3. Subqueries in WHERE

Product (pname, price, company)

Company(cname, city)

Existential quantifiers

Find all cities that make some products with price < 100

Predicate Calculus (a.k.a. First Order Logic)

$$\{ y \mid \exists x. \text{Company}(x,y) \wedge (\exists z. \exists p. \text{Product}(z,p,x) \wedge p < 100) \}$$

3. Subqueries in WHERE

Product (pname, price, company)
Company(cname, city)

Existential quantifiers

Find all cities that make some products with price < 100

Using **IN**

```
SELECT DISTINCT Company.city
FROM Company
WHERE Company.cname IN (SELECT Product.company
                        FROM Product
                        WHERE Produc.price < 100)
```

3. Subqueries in WHERE

Product (pname, price, company)
Company(cname, city)

Existential quantifiers

Find all cities that make some products with price < 100

Using **ANY**:

```
SELECT DISTINCT Company.city
FROM Company
WHERE 100 > ANY (SELECT price
                  FROM Product
                  WHERE company = cname)
```

3. Subqueries in WHERE

Product (pname, price, company)
Company(cname, city)

Existential quantifiers

Find all cities that make some products with price < 100

Now let's unnest it:

```
SELECT DISTINCT Company.cname
FROM Company, Product
WHERE Company.cname = Product.company and Product.price < 100
```

Existential quantifiers are easy ! 😊

3. Subqueries in WHERE

Product (pname, price, company)

Company(cname, city)

Universal quantifiers

Find all cities with companies
that make only products with price < 100

Universal quantifiers are hard ! ☹️

3. Subqueries in WHERE

Product (pname, price, company)

Universal quantifiers

Company(cname, city)

Find all cities with companies
that make only products with price < 100

Predicate Calculus (a.k.a. First Order Logic)

$$\{ y \mid \exists x. \text{Company}(x,y) \wedge (\forall z. \forall p. \text{Product}(z,p,x) \rightarrow p < 100) \}$$

3. Subqueries in WHERE

De Morgan's Laws:

$$\neg(A \wedge B) = \neg A \vee \neg B$$

$$\neg(A \vee B) = \neg A \wedge \neg B$$

$$\neg \forall x. P(x) = \exists x. \neg P(x)$$

$$\neg \exists x. P(x) = \forall x. \neg P(x)$$

$$\neg(A \rightarrow B) = A \wedge \neg B$$

$$\{ y \mid \exists x. \text{Company}(x,y) \wedge (\forall z. \forall p. \text{Product}(z,p,x) \rightarrow p < 100) \}$$

=

$$\{ y \mid \exists x. \text{Company}(x,y) \wedge \neg (\exists z \exists p. \text{Product}(z,p,x) \wedge p \geq 100) \}$$

=

$$\{ y \mid \exists x. \text{Company}(x,y) \} -$$

$$\{ y \mid \exists x. \text{Company}(x,y) \wedge (\exists z \exists p. \text{Product}(z,p,x) \wedge p \geq 100) \}$$

3. Subqueries in WHERE

Product (pname, price, company)

Company(cname, city)

Universal quantifiers

Find all cities with companies
that make only products with price < 100

Using **EXISTS**:

```
SELECT DISTINCT Company.city
FROM Company
WHERE NOT EXISTS (SELECT *
                  FROM Product
                  WHERE company = cname and Produc.price >= 100)
```

3. Subqueries in WHERE

Product (pname, price, company)

Universal quantifiers

Company(cname, city)

Find all cities with companies
that make only products with price < 100

Using **ALL**:

```
SELECT DISTINCT Company.city
FROM Company
WHERE 100 > ALL (SELECT price
                  FROM Product
                  WHERE company = cname)
```

Question for Database Fans and their Friends

- Can we unnest the *universal quantifier* query ?

Monotone Queries

- A query Q is **monotone** if:
 - Whenever we add tuples to one or more of the tables...
 - ... the answer to the query cannot contain fewer tuples
- **Fact**: all unnested queries are monotone
 - Proof: using the “nested for loops” semantics
- **Fact**: A query a universal quantifier is not monotone
- **Consequence**: we cannot unnest a query with a universal quantifier

Queries that must be nested

- Queries with universal quantifiers or with negation
- The drinkers-bars-beers example next
- This is a famous example from textbook on databases by Ullman

Rule of Thumb:

Non-monotone queries cannot be unnested. In particular, queries with a universal quantifier cannot be unnested

The drinkers-bars-beers example

Likes(drinker, beer)
Frequents(drinker, bar)
Serves(bar, beer)

Challenge: write these in SQL

Find drinkers that frequent some bar that serves some beer they like.

$x: \exists y. \exists z. \text{Frequents}(x, y) \wedge \text{Serves}(y, z) \wedge \text{Likes}(x, z)$

Find drinkers that frequent only bars that serves some beer they like.

$x: \forall y. \text{Frequents}(x, y) \Rightarrow (\exists z. \text{Serves}(y, z) \wedge \text{Likes}(x, z))$

Find drinkers that frequent some bar that serves only beers they like.

$x: \exists y. \text{Frequents}(x, y) \wedge \forall z. (\text{Serves}(y, z) \Rightarrow \text{Likes}(x, z))$

Find drinkers that frequent only bars that serves only beer they like.

$x: \forall y. \text{Frequents}(x, y) \Rightarrow \forall z. (\text{Serves}(y, z) \Rightarrow \text{Likes}(x, z))$

Aggregation

```
SELECT avg(price)
FROM Product
WHERE maker='Toyota'
```

```
SELECT count(*)
FROM Product
WHERE year > 1995
```

SQL supports several aggregation operations:

sum, count, min, max, avg

Except count, all aggregations apply to a single attribute

Aggregation: Count

COUNT applies to duplicates, unless otherwise stated:

```
SELECT Count(category)
FROM Product
WHERE year > 1995
```

same as Count(*)

We probably want:

```
SELECT Count(DISTINCT category)
FROM Product
WHERE year > 1995
```

More Examples

Purchase(product, date, price, quantity)

```
SELECT Sum(price * quantity)
FROM Purchase
```

```
SELECT Sum(price * quantity)
FROM Purchase
WHERE product = 'bagel'
```

What do
they mean ?

Simple Aggregations

Purchase

Product	Price	Quantity
Bagel	3	20
Bagel	1.50	20
Banana	0.5	50
Banana	2	10
Banana	4	10

```
SELECT Sum(price * quantity)
FROM Purchase
WHERE product = 'Bagel'
```



90 (= 60+30)

Grouping and Aggregation

Purchase(product, price, quantity)

Find total quantities for all sales over \$1, by product.

```
SELECT    product, Sum(quantity) AS TotalSales
FROM      Purchase
WHERE     price > 1
GROUP BY product
```

Let's see what this means...

Grouping and Aggregation


1. Compute the **FROM** and **WHERE** clauses.
2. Group by the attributes in the **GROUPBY**
3. Compute the **SELECT** clause, including aggregates.

1&2. FROM-WHERE-GROUPBY

Product	Price	Quantity
Bagel	3	20
Bagel	1.50	20
Banana	0.5	50
Banana	2	10
Banana	4	10

3. SELECT

Product	Price	Quantity
Bagel	3	20
Bagel	1.50	20
Banana	0.5	50
Banana	2	10
Banana	4	10



Product	TotalSales
Bagel	40
Banana	20

```
SELECT product, Sum(quantity) AS TotalSales
FROM Purchase
WHERE price > 1
GROUP BY product
```

GROUP BY v.s. Nested Quereis

```
SELECT    product, Sum(quantity) AS TotalSales
FROM      Purchase
WHERE     price > 1
GROUP BY  product
```

```
SELECT DISTINCT x.product, (SELECT Sum(y.quantity)
                             FROM Purchase y
                             WHERE x.product = y.product
                             AND price > 1)
AS TotalSales
FROM      Purchase x
WHERE     price > 1
```

Why twice ?

Another Example

```
SELECT product,  
       sum(quantity) AS SumSales  
       max(price) AS MaxQuantity  
FROM Purchase  
GROUP BY product
```

What does
it mean ?

Rule of thumb:

Every group in a GROUP BY is non-empty !

If we want to include empty groups in the output, then we need either a subquery, or a *left outer join* (see later)

HAVING Clause

Same query, except that we consider only products that had at least 100 buyers.

```
SELECT    product, Sum(quantity)
FROM      Purchase
WHERE     price > 1
GROUP BY  product
HAVING    Sum(quantity) > 30
```

HAVING clause contains conditions on aggregates.

General form of Grouping and Aggregation

SELECT S
FROM R_1, \dots, R_n
WHERE C1
GROUP BY a_1, \dots, a_k
HAVING C2



Why ?

S = may contain attributes a_1, \dots, a_k and/or any aggregates but **NO OTHER ATTRIBUTES**

C1 = is any condition on the attributes in R_1, \dots, R_n

C2 = is any condition on aggregate expressions

General form of Grouping and Aggregation

```
SELECT S  
FROM R1,...,Rn  
WHERE C1  
GROUP BY a1,...,ak  
HAVING C2
```

Evaluation steps:

1. Evaluate FROM-WHERE, apply condition C1
2. Group by the attributes a_1, \dots, a_k
3. Apply condition C2 to each group (may have aggregates)
4. Compute aggregates in S and return the result

Advanced SQLizing

1. Unnesting Aggregates
2. Finding witnesses

Unnesting Aggregates

Product (pname, price, company)
Company(cname, city)

Find the number of companies in each city

```
SELECT DISTINCT city, (SELECT count(*)  
                        FROM Company Y  
                        WHERE X.city = Y.city)  
FROM Company X
```

```
SELECT city, count(*)  
FROM Company  
GROUP BY city
```

Equivalent queries

Note: no need for DISTINCT
(DISTINCT is the same as GROUP BY)

Unnesting Aggregates

Product (pname, price, company)
Company(cname, city)

Find the number of products made in each city

```
SELECT DISTINCT X.city, (SELECT count(*)  
                          FROM Product Y, Company Z  
                          WHERE Y.cname=Z.company  
                          AND Z.city = X.city)  
FROM Company X
```

```
SELECT X.city, count(*)  
FROM Company X, Product Y  
WHERE X.cname=Y.company  
GROUP BY X.city
```


They are NOT
equivalent !
(WHY?)

More Unnesting

Author(login,name)

Wrote(login,url)

- Find authors who wrote ≥ 10 documents:
- Attempt 1: with nested queries

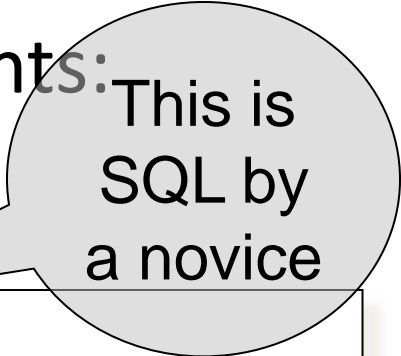


This is SQL by a novice

```
SELECT DISTINCT Author.name
FROM Author
WHERE count(SELECT Wrote.url
            FROM Wrote
            WHERE Author.login=Wrote.login)
        > 10
```

More Unnesting

- Find all authors who wrote at least 10 documents:
- Attempt 2: SQL style (with GROUP BY)

```
SELECT Author.name  
FROM Author, Wrote  
WHERE Author.login=Wrote.login  
GROUP BY Author.name  
HAVING count(wrote.url) > 10
```



This is SQL by an expert

Finding Witnesses

Store(sid, sname)

Product(pid, pname, price, sid)

For each store,
find its most expensive products

Finding Witnesses

Finding the maximum price is easy...

```
SELECT Store.sid, max(Product.price)
FROM   Store, Product
WHERE  Store.sid = Product.sid
GROUP BY Store.sid
```

But we need the *witnesses*, i.e. the products with max price

Finding Witnesses

To find the witnesses, compute the maximum price in a subquery

```
SELECT Store.sname, Product.pname
FROM Store, Product,
     (SELECT Store.sid AS sid, max(Product.price) AS p
      FROM Store, Product
      WHERE Store.sid = Product.sid
      GROUP BY Store.sid, Store.sname) X
WHERE Store.sid = Product.sid
      and Store.sid = X.sid and Product.price = X.p
```

Finding Witnesses

There is a more concise solution here:

```
SELECT Store.sname, x.pname
FROM   Store, Product x
WHERE  Store.sid = x.sid and
       x.price >=
       ALL (SELECT y.price
            FROM Product y
            WHERE Store.sid = y.sid)
```

NULLS in SQL

- Whenever we don't have a value, we can put a NULL
- Can mean many things:
 - Value does not exist
 - Value exists but is unknown
 - Value not applicable
 - Etc.
- The schema specifies for each attribute if it can be null (*nullable* attribute) or not
- How does SQL cope with tables that have NULLs ?

Null Values

- If $x = \text{NULL}$ then $4 * (3 - x) / 7$ is still **NULL**
- If $x = \text{NULL}$ then $x = \text{'Joe'}$ is **UNKNOWN**
- In SQL there are three boolean values:
FALSE = 0
UNKNOWN = 0.5
TRUE = 1

Null Values

- $C1 \text{ AND } C2 = \min(C1, C2)$
- $C1 \text{ OR } C2 = \max(C1, C2)$
- $\text{NOT } C1 = 1 - C1$

```
SELECT *  
FROM Person  
WHERE (age < 25) AND  
      (height > 6 OR weight > 190)
```

E.g.
age=20
height=NULL
weight=200

Rule in SQL: include only tuples that yield TRUE

Null Values

Unexpected behavior:

```
SELECT *  
FROM Person  
WHERE age < 25 OR age >= 25
```

Some Persons are not included !

Null Values

Can test for NULL explicitly:

- x IS NULL
- x IS NOT NULL

```
SELECT *  
FROM Person  
WHERE age < 25 OR age >= 25 OR age IS NULL
```

Now it includes all Persons

Outerjoins

Product(name, category)

Purchase(prodName,
store)

An “Inner join”:

```
SELECT Product.name, Purchase.store
FROM   Product, Purchase
WHERE  Product.name = Purchase.prodName
```

Same as:

```
SELECT Product.name, Purchase.store
FROM   Product JOIN Purchase ON
        Product.name = Purchase.prodName
```

But Products that never sold will be lost !

Outerjoins

Product(name, category)
Purchase(prodName,
store)

If we want the never-sold products, need an “outerjoin”:

```
SELECT Product.name, Purchase.store  
FROM   Product LEFT OUTER JOIN Purchase ON  
        Product.name = Purchase.prodName
```

Product

Name	Category
Gizmo	gadget
Camera	Photo
OneClick	Photo

Purchase

ProdName	Store
Gizmo	Wiz
Camera	Ritz
Camera	Wiz

Name	Store
Gizmo	Wiz
Camera	Ritz
Camera	Wiz
OneClick	NULL

Application

Compute, for each product, the total number of sales in 'September'

Product(name, category)

Purchase(prodName, month, store)

```
SELECT Product.name, count(*)
FROM   Product, Purchase
WHERE  Product.name = Purchase.prodName
       and Purchase.month = 'September'
GROUP BY Product.name
```

What's wrong ?

Application

Compute, for each product, the total number of sales in 'September'

Product(name, category)

Purchase(prodName, month, store)

```
SELECT Product.name, count(store)
FROM   Product LEFT OUTER JOIN Purchase ON
        Product.name = Purchase.prodName
        and Purchase.month = 'September'
GROUP BY Product.name
```

Now we also get the products who sold in 0 quantity

Outer Joins

- Left outer join:
 - Include the left tuple even if there's no match
- Right outer join:
 - Include the right tuple even if there's no match
- Full outer join:
 - Include the both left and right tuples even if there's no match