
CSE 390a

Lecture 3

bash shell continued:
processes; multi-user systems; remote login; editors

slides created by Marty Stepp, modified by Jessica Miller and Ruth Anderson

<http://www.cs.washington.edu/390a/>

Lecture summary

- A bit more on combining commands
- Processes and basic process management
- Connecting to remote servers (attu)
 - multi-user environments
- Text editors

Review: Redirection and Pipes

- ***command > filename***
 - Write the output of ***command*** to ***filename*** (>> to append instead)
- ***command < filename***
 - Use ***filename*** as the input stream to ***command***
- ***command1 | command2***
 - Use the console output of ***command1*** as the input to ***command2***
- ***command1 ; command2***
 - Run ***command1*** and then run ***command2***
- ***command1 && command2***
 - Run ***command1***, if completed without errors then run ***command2***

Tricky Examples

- The `wc` command can take multiple files: `wc names.txt student.txt`
 - Can we use the following to `wc` on every `txt` file in the directory?
 - `ls *.txt | wc`
- Amongst the top 250 movies in `movies.txt`, display the third to last movie that contains "The" in the title when movies titles are sorted.
- Find the disk space usage of the `man` program
 - Hints: use `which` and `du`...
 - Does `which man | du` work?

The back-tick

command1 ``command2``

- run ***command2*** and pass its console output to ***command1*** as a parameter; ``` is a back-tick, on the `~` key; not an apostrophe
- best used when ***command2***'s output is short (one line)

- Finish the example!
 - `du `which man``

xargs

command	description
xargs	run each line of input as an argument to a specified command


- xargs allows you to repeatedly run a command over a set of lines
 - often used in conjunction with `find` to process each of a set of files
- Example: Remove all my `.class` files.

```
find ~ -name "*.class" | xargs rm
```
- Find the disk usage of man using xargs
 - ```
which man | xargs du
```

# Processes

---

- **process:** a program that is running (essentially)
  - when you run commands in a shell, it launches a process for each command
  - Process management is one of the major purposes of an OS

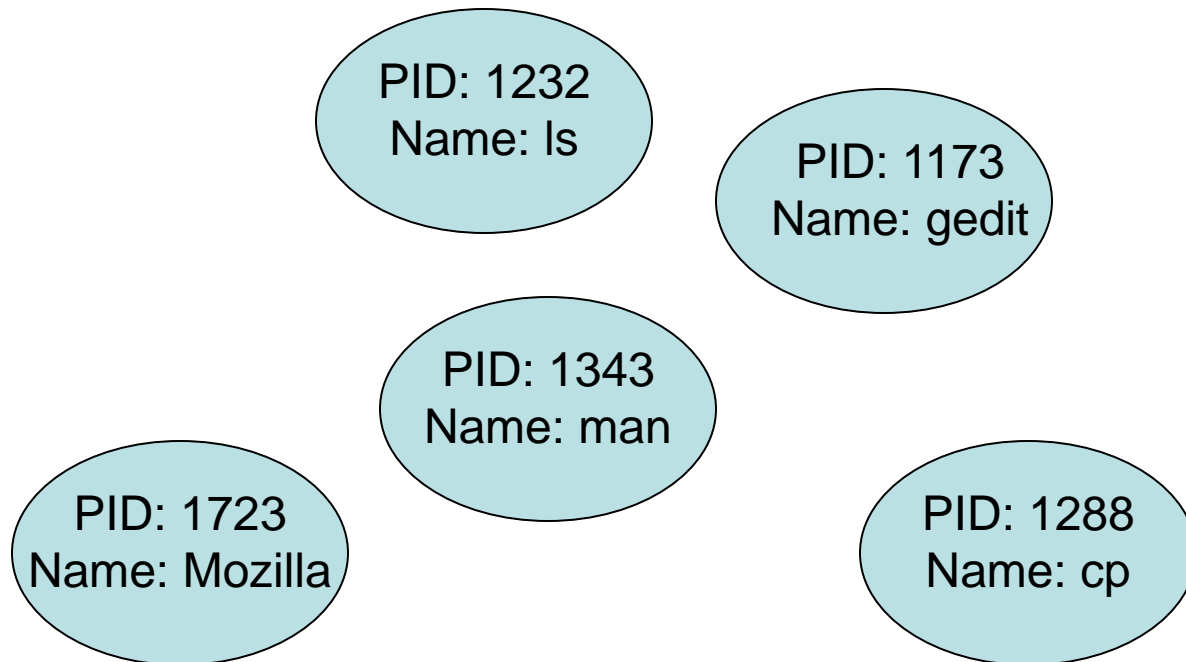

# Process commands

---

| command    | description                                                                       |
|------------|-----------------------------------------------------------------------------------|
| ps or jobs | list processes being run by a user;<br>each process has a unique integer id (PID) |
| top        | show which processes are using CPU/memory;<br>also shows stats about the computer |
| kill       | terminate a process by PID                                                        |
| killall    | terminate several processes by name                                               |

- use `kill` or `killall` to stop a runaway process (infinite loop)
  - similar to `^C` hotkey, but doesn't require keyboard intervention



# Background processes

---

| command | description                                                                                  |
|---------|----------------------------------------------------------------------------------------------|
| &       | (special character) when placed at the end of a command, runs that command in the background |
| ^Z      | (hotkey) suspends the currently running process                                              |
| fg, bg  | resumes the currently suspended process in either the foreground or background               |

- If you run a graphical program like `gedit` from the shell, the shell will lock up waiting for the graphical program to finish
  - instead, run the program in the background, so the shell won't wait:  
`$ gedit resume.txt &`
  - if you forget to use `&`, suspend `gedit` with `^Z`, then run `bg`
  - lets play around with an infinite process...

# Connecting with ssh

---

| command | description                     |
|---------|---------------------------------|
| ssh     | open a shell on a remote server |

- Linux/Unix are built to be used in multi-user environments where several users are logged in to the same machine at the same time
  - users can be logged in either locally or via the network
- You can connect to other Linux/Unix servers with ssh
  - once connected, you can run commands on the remote server
  - other users might also be connected; you can interact with them
  - can connect even from other operating systems

# The attu server

---

- attu : The UW CSE department's shared Linux server
- connect to attu by typing:  
`ssh attu.cs.washington.edu`  
  
(or `ssh username@attu.cs.washington.edu` if your Linux system's user name is different than your CSE user name)
- Note: There are several computers that respond as attu (to spread load), so if you want to be on the same machine as your friend, you may need to connect to attu2, attu3, etc.

# Multi-user environments

---

| command     | description                                    |
|-------------|------------------------------------------------|
| whoami      | outputs your username                          |
| passwd      | changes your password                          |
| hostname    | outputs this computer's name/address           |
| w or finger | see info about people logged in to this server |
| write       | send a message to another logged in user       |

- *Exercise* : Connect to attu, and send somebody else a message.

# Network commands

---

| command       | description                                                                               |
|---------------|-------------------------------------------------------------------------------------------|
| links or lynx | text-only web browsers (really!)                                                          |
| ssh           | connect to a remote server                                                                |
| sftp or scp   | transfer files to/from a remote server<br>(after starting sftp, use get and put commands) |
| wget          | download from a URL to a file                                                             |
| curl          | download from a URL and output to console                                                 |
| alpine, mail  | text-only email programs                                                                  |

# Text editors

---

| command                                | description                                  |
|----------------------------------------|----------------------------------------------|
| <code>pico</code> or <code>nano</code> | simple but crappy text editors (recommended) |
| <code>emacs</code>                     | complicated text editor                      |
| <code>vi</code> or <code>vim</code>    | complicated text editor                      |

- you cannot run graphical programs when connected to `attu` (yet)
  - so if you want to edit documents, you need to use a text-only editor
- most advanced Unix/Linux users learn `emacs` or `vi`
  - these editors are powerful but complicated and hard to learn
  - we recommend the simpler `nano` (hotkeys are shown on screen)

# Mounting remote files

---

| command | description                                          |
|---------|------------------------------------------------------|
| sshfs   | mount and interact with remote directories and files |

- An alternate usage model to remotely connecting to servers is mounting remote directories and files and work on them locally
  - once mounted, use remote directories and files as if they were local
- To mount a remote directory
  - create a local directory to mount to  
`mkdir csehomedir`
  - mount your remote files on your local system

```
sshfs username@attu.cs.washington.edu:/homes/iws/username csehomedir/
```

# Aliases

---

| command | description                      |
|---------|----------------------------------|
| alias   | assigns a pseudonym to a command |

`alias name=command`

- must wrap the command in quotes if it contains spaces
- Example: When I type `q` , I want it to log me out of my shell.
- Example: When I type `ll` , I want it to list all files in long format.  

```
alias q=exit
alias ll="ls -la"
```
- *Exercise* : Make it so that typing `q` quits out of a shell.
- *Exercise* : Make it so that typing `woman` runs `man`.
- *Exercise* : Make it so that typing `attu` connects me to `attu`.