

CSE 374 Lecture 3

More Linux and I/O Redirection



Notes

HW Intro due... if you enrolled late please feel free to complete without using a late day.

HW0 due Friday

HW1 due next Friday

Demos and info on webpage


Lots of office hours on the calendar!

Hint: It is well worth figuring out SCP, but there are some tricky bits with it.

- *You need to pay attention to which machine you execute the command on, v. which machine the file is on.*
- *You need to be careful about naming*
- *You need to have mounted your udrive on all the machines that make up the Seaside cluster.*

It might be easier to just view your udrive directly from your home computer.

Linux Model

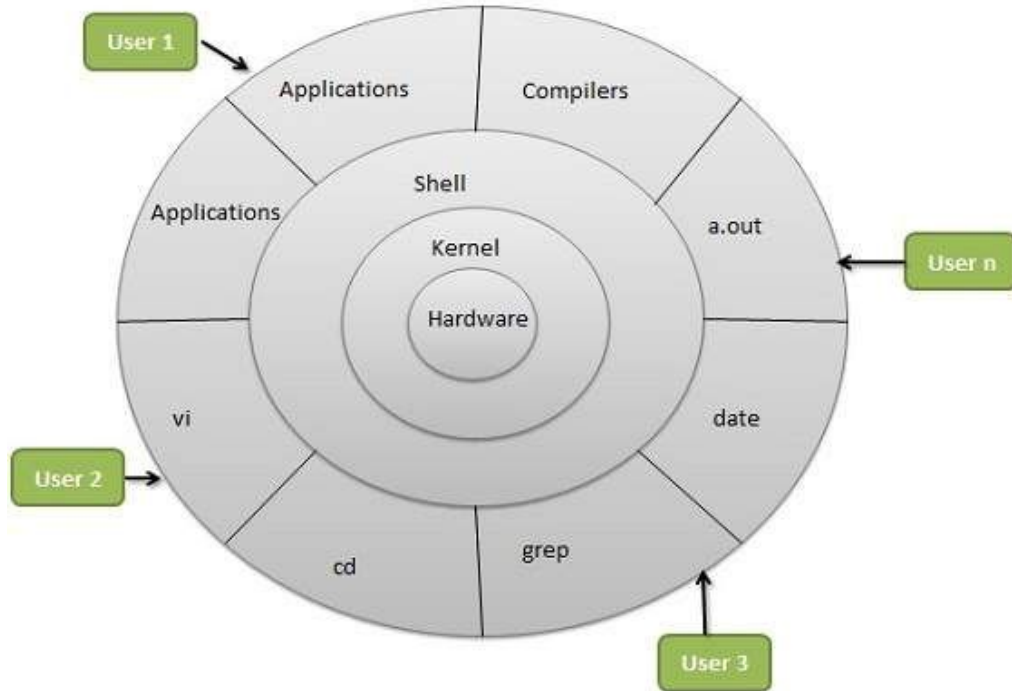

Linux -
Portable; multi-user


Includes

- Hardware layer (drivers, etc.)
- Kernel (does all the hardware interaction)
- Shell (provides user friendly interface to kernel)
- Processors (various programs)
- Users - multiple users run processes

http://www.tldp.org/LDP/intro-linux/html/chap_01.html

File Systems

(Processes interact with data, stored in a file system)

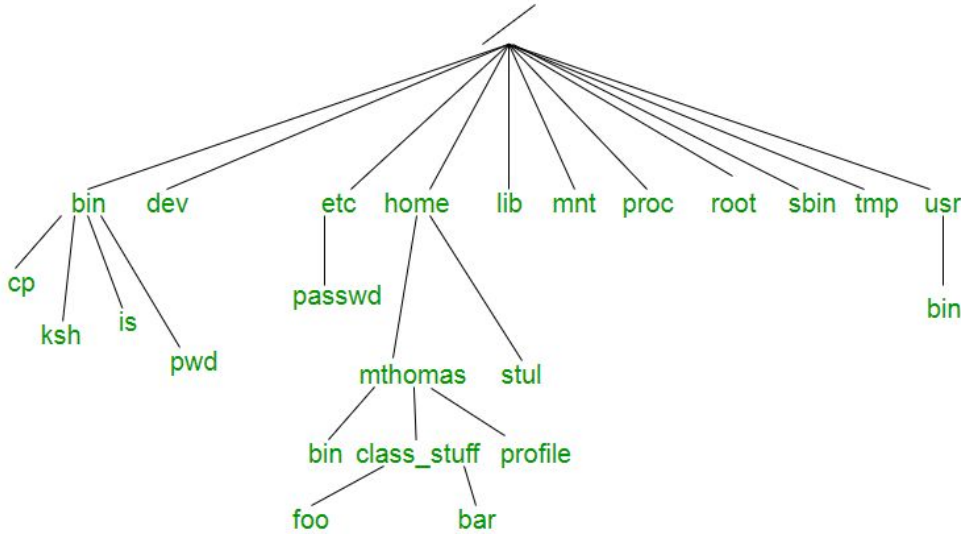

- ❑ File systems are trees
- ❑ (or directed acyclic graphs)
- ❑ A file (or directory) is specified by its path from the top ('/')
- ❑ Can be specified absolutely or
- ❑ Relatively (from current location)
 - ❑ This directory './'
 - ❑ One directory up '../'
- ❑ You have access to your 'home' directory ('~')

More: https://refspecs.linuxfoundation.org/FHS_3.0/fhs/index.html
Also true on Windows, btw, although the structure and some notation is different.

Demo - whoami, pwd, ls, mkdir, cd, cp, mv, rm, less, more
http://www.tldp.org/LDP/intro-linux/html/sect_03_01.html


Getting Help

Most commands: 'man ls'

Also "--help"

Look for keyword: 'man -k'

http://www.tldp.org/LDP/intro-linux/html/sect_02_03.html

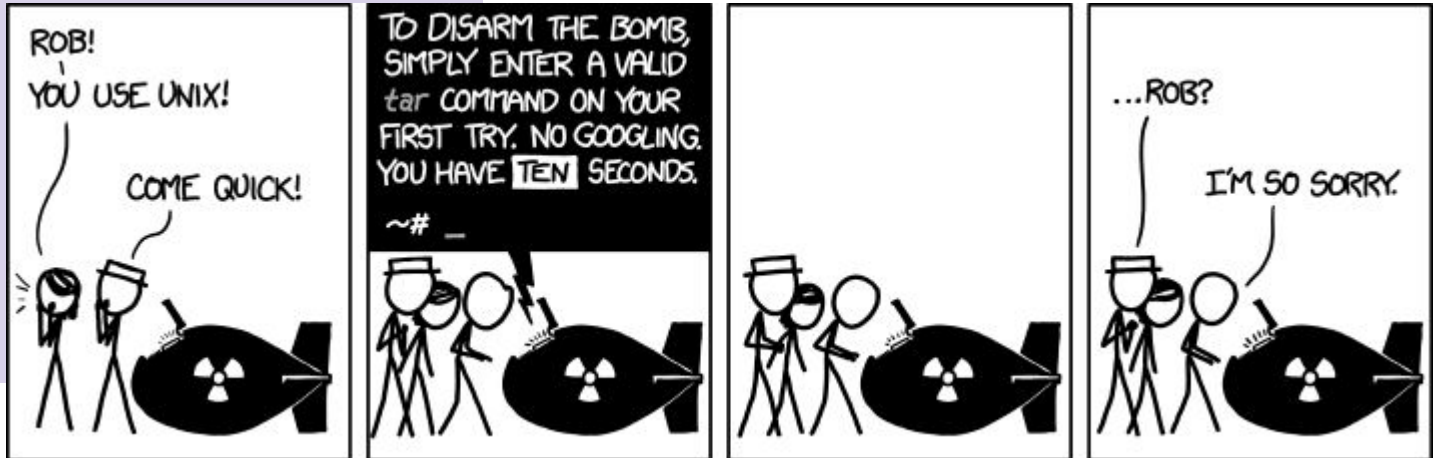

Bash (shell) Language

- Bash acts as a language interpreter
 - Commands are subroutines with arguments
 - Bash interprets the arguments & calls subroutine
 - Bash also has its own variables and logic



*BASH applies its own processing
to the I/O text - 'globbing'*

Special Characters

- Directory Shortcuts
 - ~uname or ~
 - ./ or ../
- Wildcards - *Globbering*
 - 0 or more chars: *
 - Exactly 1 char: ?
 - Specified chars: [a-f]

History, or '!'

Special Characters

! > < & | * ~ [] “ ‘ ` \$ /

\ is escape
character



“string”



‘string’

What do they all
mean?

Would substitute
things like \$VAR


Suppresses
substitutions

Shell Behavior

All redirection & string expansion or substitutions are done by the shell, before the command.


Command only sees resulting I/O streams.

Processes all can take INPUT from one source, the default being StdIn.

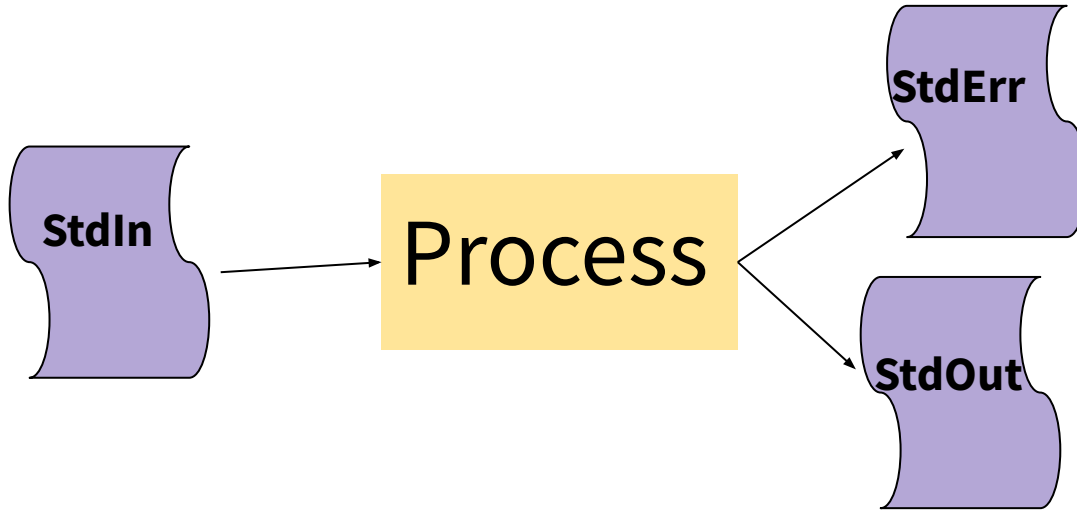

Processes have two OUTPUT destinations, the default being StdOut and StdErr. You can think of these as two potential files to which a processes can write.

But, instead of using StdIn you can use any file, and 'redirect' it in by using the '<' symbol (pointing towards process).

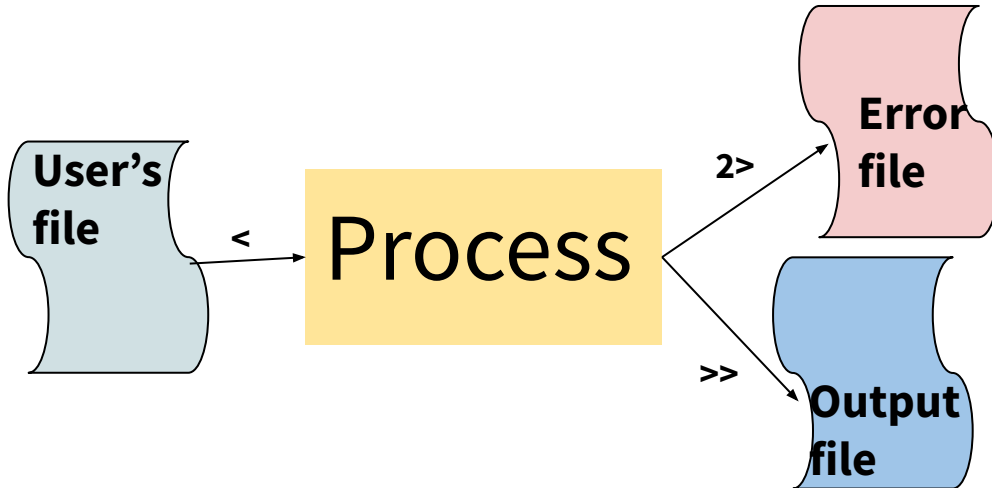

You can also write to different files instead of StdErr or StdOut. The '>' symbol means to put in an new file, while '>>' means to append to the end of a file. The '2' specifies that you want iostream '2', or the error stream.

I/O Streams

- All bash commands have three streams
 - 0- stdin [keyboard]
 - 1- stdout [screen]
 - 2-stderr [screen]
- Can redirect streams
 - < yourInput
 - > yourOutput
 - >> appendYourOutput
 - 2> yourError
 - &> yourOutput&Error
 - And more...
- Special File /dev/null
 - Is EOF if input
 - Data is discarded if output
- Can combine one cmd to the next
 - Cmd1 | cmd2 - pipe output of cmd1 into input of cmd2
 - Cmd1; cmd2 - do one after another
 - Cmd1 `cmd2` - use output of cmd2 as argument to cmd1
- Can use cmd logic
 - Cmd1 || cmd2 - do cmd2 if cmd1 fails
 - Cmd1 && cmd2 - do cmd 2 if cmd1 succeeds

Some Bash redirection syntax

redirect stdout to a file →	<code>command > output</code>
redirect stderr to a file	<code>command 2> output</code>
redirect stdout to stderr	<code>command 1>&2 output</code>
redirect stderr to stdout	<code>command 2>&1 output</code>
redirect stderr and stdout to a file	<code>command &> output</code>

Reading: [Bash Redirections](#) (spec), [bash hackers redirections](#) (examples)

3.5.4 Command Substitution

Command substitution allows the output of a command to replace the command itself. Command substitution occurs when a command is enclosed as follows:

```
$(command)
```

or

```
`command`
```

by executing *command* in a subshell environment and replacing the command substitution with the output, with any trailing newlines deleted. Embedded newlines are not deleted, but they may be removed. Command substitution `$(cat file)` can be replaced by the equivalent but faster `<(cat file)`.

When the backquoted form of substitution is used, backslash retains its literal meaning except when followed by `'`, `"`, or `\`. A backslash followed by a backslash terminates the command substitution. When using the `$(command)` form, all characters are treated literally; none are treated specially.




To nest when using the backquoted form, escape the inner backquotes with backslashes.

When using thin double quotes, word splitting and filename expansion are not performed on the results.

pipes

JULIA EVANS
@b0rk

drawings.jvns.ca

<p>Sometimes you want to send the <u>output</u> of one process to the <u>input</u> of another</p> <pre>\$ ls wc -l</pre> <p>53 ← 53 files!</p>	<p>a pipe is a pair of 2 magical file descriptors</p> <p>● and ●</p> 	<p>When <code>ls</code> does <code>write(●, "hi")</code> <code>wc</code> can read it! <code>read(●)</code> → "hi"</p>
<p>pipe buffers</p> <p><code>ls</code> "I'm gonna write a bajillion bytes to ●"</p> <p>"uh no if my buffer is full you have to wait" ●</p>	<p>what if your target process dies?</p>  <p><code>ls</code> gets sent <code>SIGPIPE</code> if ● gets closed (<code>ls</code> usually dies)</p>	<p>you can pipe SO MANY things together</p> <pre>\$ a b c d e</pre>  <p>pairs of pipes</p>

Questions, Concerns, Comments before we proceed?

Top



Powered by  **Poll Everywhere**

Start the presentation to see live content. For screen share software, share the entire screen. Get help at pollev.com/app

Alias

Defines a shortcut or 'alias' to a command.

(Essentially a really easy script)

Also, 'alias'

.bashrc

Variables & Alias

Define variable

```
i=15
```

Access variable

```
$i
```

Undefined variable is empty string

```
Alias cheer="echo yahoo\!"
```

Towards Scripts

- Shell has a state (working directory, user, aliases, history, streams)
- Can expand state with variables
- ‘Source’ runs a file and changes state
- Can run a file without changing state by running script in new shell.

Emacs (text editor)

C-x C-s #save

C-x C-c # quit

C-e # go to end of line

C-a # go to beginning of line

C-x C-f # find a file

C-g #exit menu

C-x C-k # kill a buffer

You can use any text editor you like. Emacs is amazingly powerful, and highly customizable with lisp scripts. It is probably worth learning.

Okay, lets make a script!

1. First line of file is `#!/bin/bash` (specifies which interpreter to execute)
2. Make file executable (`chmod u+x`)
3. Run a file `./myNewScript`
4. Shell sees the shell program (`/bin/bash`) and launches it to run the script
5. Can include
 - a. String tests (string returns true if non-zero length, `string < string`, etc.)
 - b. Logic (`&&`, `||`, `!`) - use double brackets
 - c. File tests (`-d` : is directory, `-f`: is file, `-w`: file has write permission etc.)
 - d. Math - use double parens

Script Arguments & Errors

Script refers to i^{th} argument at $\$i$; $\$0$ is the program

Use 'shift' to move arguments towards left ($\$i$ become $\$i-n$)

Exit your shell with 0 (normal) or 1 (error)

Exit Codes

Command 'exit' exits a shell, and ends a shell-script program.

Exit with no error:

```
Use exit or exit 0
```

Exit with error:

```
User exit 1 or.. {1-255}
```

Variables useful in a script

`$#` stores number of parameters (strings) entered

`$0` first string entered - the command name

`$N` returns the Nth argument

`$?` Returns state of last exit

`$*` returns all the arguments

`$@` returns a space separated string with each argument

(* returns one word with spaces, @ returns a list of words)