

Processes


CSE 410, Spring 2006
Computer Systems

<http://www.cs.washington.edu/education/courses/410/06sp/>

Reading and References

- Reading
 - » Chapter 4 through 4.5.4, *Operating System Concepts*, Silberschatz, Galvin, and Gagne
- Other References
 - » *Inside Microsoft Windows 2000*, Third Edition, Solomon and Russinovich

Example OS in operation

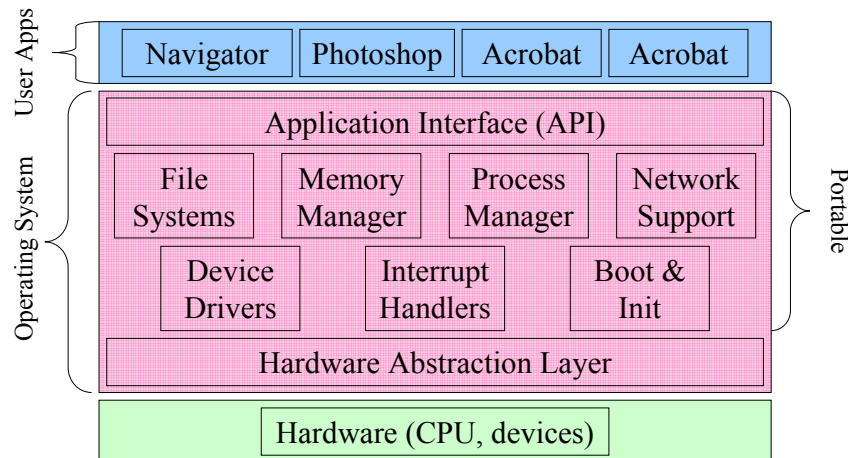

Programs and Processes

- A **program** is passive
 - » a file on disk with code that can be run
- A **process** is active
 - » an instance of a program in execution
 - » also called *job*, *task*, *sequential process*
- There are always many processes running
- Some may be running the same program
 - » but they are still separate and independent processes


What are the parts of a process?

- code for the running program
- data for the running program
 - » heap, stack
- location of the next instruction (PC)
- current state of the general-purpose registers
- list of open resources
 - » files, network connections
- lots of OS management data

Process State

- Each process has an execution state that indicates what it is currently doing:
 - » **ready**: waiting to be assigned to the CPU
 - » **running**: executing instructions on the CPU
 - » **waiting**: waiting for an event, e.g., I/O completion, so that it can be made ready
- As a program executes, the OS moves the process from state to state

Process State Changing

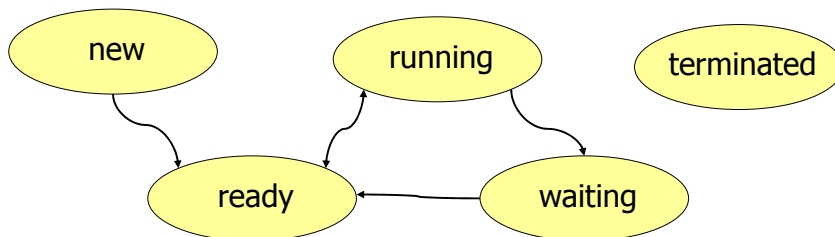

Processes move from state to state as a result of actions they perform (e.g., system calls), OS actions (rescheduling) and external actions (interrupts)

Process Data Structures

- At any time, there are many processes active in a system
- The OS has data structures representing each process
 - » primary structure is the Process Control Block (PCB)
- PCB contains info about a process
 - » including pointers to other related data blocks

PCBs and Hardware State

- When a process runs, its PC, SP, and registers, are loaded on the CPU
- When the OS switches to a new process, it
 - » saves the current process's register values to its PCB
 - » loads the next process's register values from its PCB
- This is called a **context switch**. It occurs 100-1000 times per second
 - » why so often?
 - » why not more often?


Context switch is pure overhead

- Switching processes can be expensive
 - » register reload
 - » OS data structures
- Lightweight context reduces cost of switch
 - » threads
- Special hardware reduces cost of switch
 - » larger register files with register windows

Simple Process Control Block


process state
process number
program counter
stack pointer
32 general-purpose registers
memory management info
username of owner
queue pointers for state queues
scheduling info (priority, etc.)
accounting info

Simplified W2K Process Data

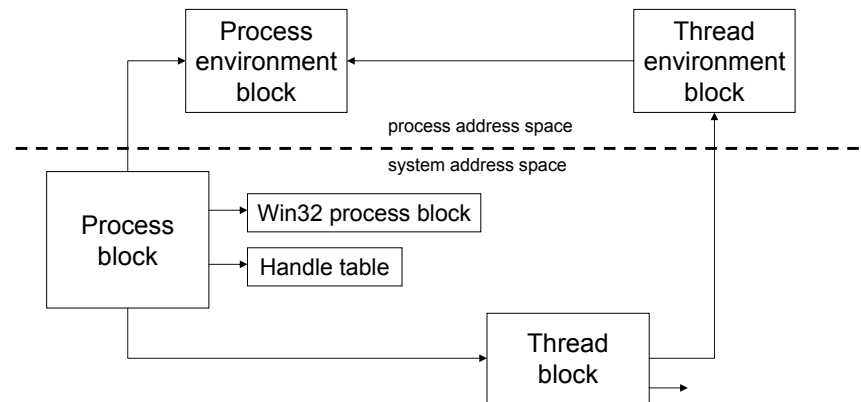

Copied from *Inside Windows 2000*

Process State Queues

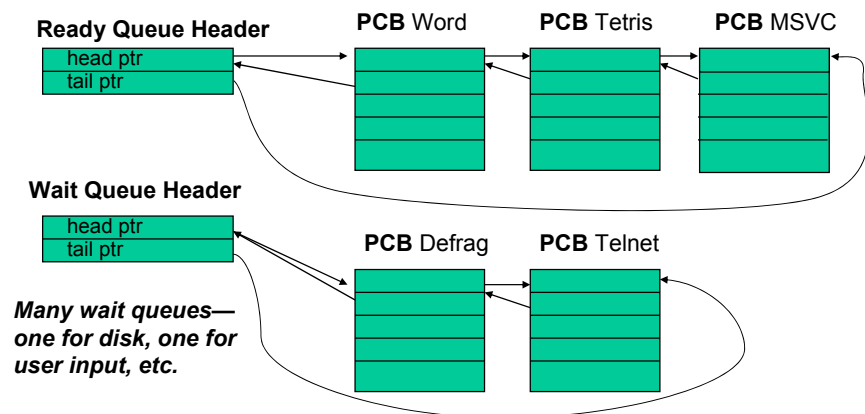

PCBs and State Queues

- PCBs are data structures in OS memory
- A PCB is created for a process when it starts and put on the ready queue
- While the process is active, PCB is on one of the state queues
- When the process is terminated, its PCB is deallocated (*after a little while*)

Getting control back

- How does the OS get control back from a running process?
 - » The process could explicitly return control to the OS (in many real-time systems)
 - » Generally, we can't trust the process to do this
- OS sets a timer on the CPU (privileged instruction) and starts a user process
- When the timer expires control passes to OS
 - » impact on "hard real-time" system?

Scheduling a process

- Batch processes tend to be scheduled over a long period by a job scheduler
 - » explicit dollar value on priority
 - » longer time in CPU once loaded and started
- Interactive or soft real time processes are started as needed and compete for CPU
 - » dynamic priorities
 - » rapid context switching of many processes

Creating a process

- The OS creates processes upon request
- The first few processes are all part of the operating system itself
 - » services, sessions, spoolers, network tools, ...
- Further processes created as response to login, user command, scheduled events
 - » winlogin, sshd, navigator, photoshop, ...

10-May-2006

cse410-19-process © 2006 DW Johnson and University of Washington

17

create-process

- OS provides create-process system call
 - » parent process creates one or more children
 - » each child can create more children
 - » the result is a process tree
- Parent can wait or continue immediately
 - » create a process and block (synchronous)
 - » create a process and continue (asynchronous)

10-May-2006

cse410-19-process © 2006 DW Johnson and University of Washington

18

```
C:\home\finson>pslist -t
```

```
Process information for ASH:
```

Name	Pid	Pri		
Idle	0	0	explorer	1376 8
System	8	8	firefox	528 8
SMSS	164	11	WINZIP32	1964 8
WINLOGON	184	13	CMD	1272 8
SERVICES	236	9	pslist	1956 13
svchost	428	8	ADUserMon	1340 8
naPrdMgr	616	8	LVCms	1496 8
spoolsv	456	8	point32	1508 8
svchost	488	8	LogiTray	1532 8
AppServices	504	8	SOUNDMAN	1540 8
FrameworkServic	536	8	Imgicon	1560 8
mcshield	568	13	pageant	1576 8
vstskmgr	584	8	UpdaterUI	1592 8
mdm	660	8	rundll32	1608 8
nvsvc32	712	8	MMTray	1628 8
regsvc	780	8	jusched	1648 8
mstaak	796	8	qtask	1676 8
SAgentNT	844	8	POWERPNT	1684 8
EBRR	808	8	shstat	1696 8
stisvc	888	8	tbmon	1732 8
WinMgmt	940	8	AcroTray	1760 8
svchost	1084	8	WZQPKICK	1788 8
ADService	1140	8	ssh_accession.e	1848 8
mysqld-nt	1332	8	xwin32	1896 8
LSASS	248	9		
CSRSS	188	13		

Processes running on my Win2K desktop

W2K CreateProcess function

- Open the program file to be executed
- Create the W2K executive process object
- Create the initial thread (stack, context, ...)
- Notify Win32 subsystem about new process
- Start execution of the initial thread
- Complete initialization (eg, load dlls)
- Continue execution in both processes

Copied from *Inside Windows 2000*

10-May-2006

cse410-19-process © 2006 DW Johnson and University of Washington

20